

TEST EQUIPMENT

ATS E50A MAGNETO SYNCHRONIZER



The ATS E50A Magneto Synchronizer is a modern redesign of the classic test instrument used by aviation mechanics around the world for over 50 years. It uses surface-mounted (SMD) micro-circuitry to eliminate the need for the bulky vibrator, and heavy transformers. The new technology of the E50A uses low voltage signals to measure the inductance of the magneto and precisely detect the moment the points break, without any false readings. The ATS E50A also features enhancements to make your job easier, such as a Built-In Calibrated Test Point to validate your tester before each use; a battery monitor to give you plenty of warning before your tester runs out of power; and Quiet-Mode operation that alerts you only when the points break - so no more annoying "buzz-box" always screaming at you when you're trying to do a test P/N 12-01013

AIRCRAFT TIMING INDICATOR MODEL E25



The Aircraft Timing Indicator Model E25 is a unique device that locates the relative relationships between the crankshaft, magneto point openings, camshaft and valve timing. Easily attached to the propeller spinner with mounting bands that are included with the unit, the E25 quickly and accurately (within 1/2 degree!) locates top dead center. The result: the all-aluminum Model E25 speeds up and improves the process of timing magnetos to the engine. With its easy-to-read dial and 18mm, hardened aluminum piston stop, the E25 is a snap to use. Note: Piston Stop is included.

E25 Timing Indicator P/N 12-01014
Replacement Piston Stop P/N 12-18100

MAGNETO TIMING LIGHT



Measures the change in inductance in the magneto coil when the points open and close. Simply shorting the clip leads together will not indicate a point closing, therefore eliminating any false reading caused by loss of contact to the magneto grounding terminal. Adjust magneto timing accordingly. 100% solid state, compact 3/4" x 3" x 5" size, long battery life. Color coordinated leads are 4 ft. long. Comes in strong anodized aluminum case. Dual Magneto Synchronizer w/Tweeter P/N 12-16901
Single Magneto Timing Light w/Tweeter P/N 12-16903

USA BORESCOPIES PRATT & WHITNEY INSPECTION KIT



The PWC34910-109 inspection kit features the widely popular videoscope (video borescope) system consisting of a 4mm diameter, 1500mm working length, joystick articulation, durable tungsten sheathing, built in picture taking, video recording, removable SD card, lithium ion battery pack, and LCD viewing screen all built into a compact form. These systems has many improvements over the years to allow for better light output, better image quality, and upgraded recording software to better serve the inspection professionals utilizing the equipment. This borescope kit has been found especially useful for the inspection of PT6 engines, highlighting the units small diameter, short distal ends in order to easily navigate through the PWC34910-200, PWC34910-400, PWC34910,600 guide tubes. The kit also includes one PT6 guide tube of your choice, a rigid sleeve set along with gripping handle, heavy duty carrying case, SD card reader and battery charger. HD Version P/N 12-06452
Standard Version P/N 12-06451

WINDOW INSPECTION PRISM KIT



This tool kit provides a proven method to inspect for cracks on the hidden edges and bolt holes of aircraft windows. Kit contains the prism, hard-coated with AWR 8000, 1 oz. bottle of coupling fluid, flashlight and an instruction guide, all in a durable carrying case. P/N 09-05588

ENGINE TEST KIT



EK5EM - The Engine Test Kit EK5EM has all of the test equipment needed to check engine compression, synchronize magnetos, time aircraft engines, and test ignition leads all in one tool box. The kit contains: the 2EM Differential Pressure Tester with master Orifice, LED52 Electronic Magneto Synchronizer, Eastern E25 Aircraft Timing Indicator, Eastern E5 High Voltage Cable Tester, the Compression Tester Extension & Hip Roof Tool Box P/N 12-02449

EK5 - ATS Engine Test Kit has all of the test equipment needed to check engine compression, synchronize magnetos, time aircraft engines, and test ignition leads all in one tool box. Contains: 2E, LED52, Eastern E25, Eastern E5, & 19000 tool box. Now includes the 18mm-XT Compression Tester Extension P/N 12-02943

ATS E5A HIGH VOLTAGE CABLE TESTER



The Model E5 High Voltage Cable Tester tests Hi-Voltage aircraft engine ignition cables quickly and accurately. And it's incredibly easy to use: simply connect the three wires, push the test button and check the test window. That's all there is to it. By simulating the magneto's high output voltage, the E5 instantly identifies both good and defective cables. And it operates on either 12 or 24 volts, D.C. The E5 eliminates guess work, saves valuable time, is equipped with an audio high voltage indicator to ensure safety and is 100% dependable. And no other high quality cable tester is as attractively priced P/N 12-01016

BARFIELD DIGITAL TURBINE TEMP TEST SET



The Barfield TT1200A is a Digital Turbine Temperature Test Set. It is microprocessor based, completely self-contained, battery powered unit housed in a high visibility ruggedized enclosure. It is designed with sufficient accuracies and range to be able to test digital and glass cockpit indicators with simple operation, direct reading, and multi-function versatility. The TT1200A is specifically designed to accomplish all requirements for testing the aircraft Chromel/Alumel (K type) turbine temperature measuring systems. The Test Set can measure resistances down to 0.001 ohms, measure insulation up to 200M ohms, perform indicator run-outs with a resolution of 0.1°C or 1°C and a range of 1372°C P/N 11-13986

ATS DIFFERENTIAL CYLINDER PRESSURE TESTERS



Comes complete with on-off safety valve to eliminate pressure when disconnecting from the cylinder. Can be used to check intake or exhaust valves, cracked or worn rings, defective cylinders, worn bushings, etc.
LESS THAN 5" BORE
Specifications: Orifice size is .040". precision gauges matched to within +/-2%. 18MM plug adapter. 24" pressure hose. Includes hose and spark plug adapter. Factory calibrated. Letter of certification available upon request. Note: For an engine cylinder having less than a 5.00-inch bore; 0.040-inch orifice diameter; .250 inch long; and a 60-degree approach angle. P/N 12-02344

GREATER THAN 5" BORE

Specifications: Orifice size is .060". precision gauges matched to within +/-2%. 18MM plug adapter. Includes hose and spark plug adapter. Factory calibrated. Letter of certification available upon request. Note: For an engine cylinder with 5.00 inch bore and over: 0.060 inch orifice diameter, .250 inch long, and a 60 degree approach angle. P/N 12-02345

18MM CYLINDER PLUG

18MM adapter plug used with the ATS 2E and 2EM Differential Pressure Testers. For engines with massive electrode plugs. P/N 12-05064

DIFFERENTIAL PRESSURE TESTER WITH MASTER ORIFICE



Now you can conveniently check the calibration of your pressure tester before each use without disconnecting the tester. Comes with complete instructions. Includes hose and spark plug adapter.

5" Bore Diameter or smaller
P/N 12-02346
Bore Diameters greater than 5"
P/N 12-02347

TO

TEST EQUIPMENT – BORESCOPIES

ATS TIME-RITE® PRO BASIC KIT - 18MM ENGINES



The classic tool for timing aircraft engines. Timing is accomplished by means of pivot arm actuated by the piston's motion, a slide pointer, automatically referenced by the pivot arm and an adjustable calibrated scale. 18mm basic unit. P/N 12-05511

ATS TIME-RITE® PRO COMPLETE KIT - 18MM ENGINES

Time-Rite has been the number one choice of aviation mechanics for over 40 years when it comes to precisely timing engines. Time-Rite is an instrument designed for precision timing of aircraft engines by direct measurement of piston travel. The complete kit includes the basic unit plus the complete set of Arms and Scales required to service 18mm enginesP/N 12-05512



ATS TIME-RITE® DELUXE COMBO KIT

Deluxe combo kit contains everything needed to handle every engine listed in the timerite manual. Time-Rite is an instrument designed for precision timing of aircraft engines by direct measurement of piston travel. Kit Includes: (1) 18mm Time-Rite unit, (1) 14mm Cone, A complete set ofP/N 12-02872



ATS PRO DIFFERENTIAL PRESSURE TESTER KIT

ATS 2EM Differential Pressure Tester (with Master Orifice) and the Spark Plug Port Extension Tool together, to make your life a whole lot easier.

Note: The ATS 2EM Differential Pressure Tester has a .040" orifice as required by Teledyne Continental SB03-3 Service Bulletin, and is the proper type of instrument to test ALL Teledyne Continental engines in accordance with the aforementioned bulletin. The ATS 2EM also complies Textron Lycoming SI-1191A Service Instruction and is appropriate for ALL Textron Lycoming engines as indicated in the Service Instruction.....P/N 12-03330



COMPRESSION TESTER EXTENSION

This tool makes compression testing easy. Wrench free way to test that allows for exhaust system and baffling clearance. Tester is manufactured with quality-welded construction and offers a spark plug thread with O-Ring seal. It has a standard air fitting. P/N 12-01060

2mm Extension.....P/N 05-06883



ATS COMPRESSION TESTER EXTENSION

A replacement plug adapter with an 8-1/2" reach to work around manifolds, baffling, harnesses, support structures, and anything else that gets in your way. **Note:** For use with ATS models 2E and 2EM Compression Testers. 1 lbs (0.5Kg) weight. 18MM aviation engine plug threads 8-1/2" long to clear obstacles. Standard.

ATS Compress Test Extension...P/N 12-02380

Compression Tester Extension (12 mm) 12MM-XT P/N 12-06865

SEEKER 300 VIDEO BORESCOPE SYSTEMS



The Seeker 300 Video Borescope System offers a large 3.5-inch LCD color monitor and a 5.5mm flexible, configurable camera probe with adjustable LED lighting. Ideal for use in the visual inspection of otherwise inaccessible areas. This Video Borescope Kit also includes a mirror, magnet and pick-up hook that can be attached to the end of the probe. 3.5" (88.9mm)

Color LCD Screen for crystal clear image, superb clarity and viewing effect. 5.5mm or 12mm diameter Camera-tipped Probe is flexible and strong with built-in adjustable LED lighting, and is slim enough to perform automotive engine check-up. Probe Length: Standard: 3.28ft. (1m), Optional: up to 16ft (5m). View findings instantaneously. 12mm Probe P/N 12-02297

ATS AUTO RANGE MULTIMETER



A 3-3/4 digit multimeter featuring both manual and auto-ranging capabilities. Large digits with backlight for easy reading. Has all the features you would expect from a professional quality multimeter such as: true RMS readings for AC voltage and current, diode and transistor testing capability, precision DC voltage, DC current, resistance, capacitance and frequency reading (accurate up to 0.5%). All inputs protected against overload. Includes shock-resistant case.P/N 12-06981



HAWKEYE® V2 VIDEO BORESCOPE

The Hawkeye® V2 Videoscopes contain a brighter, higher resolution, more durable camera, delivering sharp, clear photos and videos in a wide range of demanding inspection applications. The larger 5" LCD screen provides detailed close-up views, and has a 2X zoom function, mirror image capability, and easy-to-use intuitive controls. Has an articulation mechanism, and has increased the range to +/-150 deg. The insertion tube has rugged, 4-layer construction, with a crush resistant stainless steel inner layer. Available in diameters of 4 and 6 mm, lengths of 1.5m, 3.0m, and 6.0m.

VISIT WWW.AIRCRAFTSPRUCE.COM FOR PART NUMBERS AND PRICING.



HAWKEYE® V3 HD VIDEO BORESCOPIES

The Hawkeye® V3 Video Borescope features a Micro HD video camera, and custom-engineered image processor. The 4- and 6-mm Hawkeye V3's deliver simply the best image quality of any borescope on the market today! Video footage, and still images, captured by the V3 appear crystal clear and with vibrant, lifelike colors. Incorporates a large, 5.5-inch HD, daylight readable, touch-screen display. Easily displays, captures, and transmits over WiFi, crystal clear High-Definition (HD) video and still images, and does so using a sleek, ergonomic design, superior construction, and intuitive user interface. A valuable tool for numerous manufacturing quality control applications... in the QC Lab and on the shop floor. Also, an essential tool for aircraft, and power generation, windpower, and engine and systems maintenance teams. The fully portable V3 provides fast, accurate diagnostics, in mission-critical situations, without the need for costly, time-consuming engine teardown. Interchangeable 90-degree and close-focus optical tips are optional. The smooth servo-driven articulation range is +/- 180 degrees. The V3 can operate continuously for 6 hours without the need for recharging. The V3 contains an integrated, high-efficiency Micro LED light source.

Diameter	Length	Part No.	Price
4mm	1.5m (4)	12-05637	.
4mm	3.0m (9)	12-05638	.
6mm	3.0m (9)	12-05639	.
6mm	1.5m (4)	12-05640	.

ENGINE OIL PRESSURE TEST KIT



Test and diagnose problems with engine oil pressure in diesel or gasoline engines with this easy-to-use kit. The oil pressure test kit contains a wide assortment of durable brass adapters designed to fit most engines. The kit includes a rugged 66 in. high pressure rubber hose and a tough steel gauge that withstand even harsh work conditions. P/N 12-05093



JOYSTICK ARTICULATION 4MM VIDEOSCOPE 1.5 METER

This HD image quality borescope offers 360° all-way rotating articulation. The articulation allows you to maneuver or steer the tip of the probe. This is an essential feature for aviation borescope inspections while inspecting turbine blades. This is also a valuable option for other nondestructive test inspections as it allows you to view the full view of the inspection area without having to disassemble the finished product. Features: • Joystick Articulation • 5" HD Touch Screen • Photo / Video Recording via Micro SD Card (1280x720px) • Video out via HDMI output • Digital Zoom • Graffiti to mark objects • 8 character text annotation • EV Adjustment. ..P/N 12-06448

USA 2 WAY ARTICULATING PORTABLE RECORDING VIDEOSCOPE



The USAVS2-2.8-1000 has been added to USA Borescopes economy videoscope line up because it offers end users the opportunity to upgrade from a lower cost fiberscope to an articulating videoscope with its own internal lightsource, video recording, picture taking, and SD card storage. This unit features tungsten sheathing as found in many other higher end videoscope systems. The image quality provides an improvement over flexible fiberscopes which typically will feature between 9,000-15,000 pixels. This unit is a basic system to allow for a low cost inspection option.....P/N 12-04963

INSPECTION SCOPES

VIVIDIA ABLESCOPES AND BORESCOPES



VIVIDIA ABLESCOPE VA-400 V5

Vividia Ablescope VA-400 V5, ideal for detailed visual inspection in hard-to-reach places such as car engines with 180 Degree articulation 8.5mm diameter steel probe and 8 bright LED lights. The 180 degree bending back probe camera

with LED lights makes it possible to inspect the back side of an dark inside compartment. **Features:** • Articulation bendable angle: 0° to 180° continuously adjustable. You can inspect the back side of a closed dark compartment • Very easy to operate. Just push down the release button by bending the thumb to adjust the articulation angle • Very small bending radius: 30mm • Illumination: 6 white LED lights built-in • High resolution image with CMOS sensor • Focal Distance: 0.5cm – 100cm, fixed focus with broad focus range • Power supply: by USB port of PC, tablet, or phone.

VA-400 V5 USB Borescope ONLY.....P/N 12-04891
VA-400 V5 & W03B Wi-Fi Box BundleP/N 12-06268

VIVIDIA ABLESCOPE VA-400I - The Vividia Ablescope VA-400I borescope is perfect tool for conducting detailed inspections in difficult-to-access areas, like engines. It features a flexible 180-degree articulating 8.5mm diameter steel probe, equipped with 8 bright LED lights. This design enables thorough examination of dark, internal compartments, particularly the backside areas that are typically hard to see. * No more changing rubber sleeves!

P/N 12-06446



VIVIDIA ABLESCOPE VA-408

Vividia VA-408 is a long version of VA-400 USB one-way articulating rigid straight borescope. The probe tube of VA-400 is 400mm (15.8"), while VA-408 has 800mm (31.5") long probe tube.

P/N 12-05641



VIVIDIA LCD & WIFI TWO WAY ARTICULATING INSPECTION CAMERA BORESCOPE VIDEOSCOPE

- Vividia CT-6010 LCD/WiFi. Waterproof Two-Way Articulating Video Borescope with 4.5" Monitor and 6mm Diameter 1.0 Meter Long Probe.

P/N 12-05630



VIVIDIA JOYSTICK 360° ALL AROUND ARTICULATION VIDEO BORESCOPE

Vividia ME-610i USB Flexible Smartphone Joystick Articulating Inspection Camera Borescope has 6mm diameter and 1 meter long flexible probe, which is covered with polymer tube for durability and waterproof IP67. Vividia ME-610i has bright LED lights, joystick pivoting 6mm (0.236") probe camera and it can be used to look into dark places as a diagnostic inspection camera.

P/N 12-05629



VIVIDIA ABLESCOPE VA-920

Vividia Ablescope VA-920 is a handy borescope inspection tool. It is short and the semi-flexible cable can be formed to shapes you want. The image is clear, and can be connected to PC, Mac, Android devices.

P/N 12-04893



VIVIDIA 360 DEGREE ROTATIONAL BORESCOPE

- Vividia Ablescope VA-400 V5, ideal for detailed visual inspection in hard-to-reach places such as car engines with 180 Degree articulation 8.5mm diameter steel probe and 8 bright LED lights. The 180 degree bending back probe camera with LED lights makes it possible to inspect the back side of an dark inside compartment.

Specifications: • Sensor: high-quality CMOS sensor

Still Image Resolution: 1280x720 pixels • Format: JPG • Video Resolution: 1280x720

pixels • Format: AVI • Frame Rate: 30FPS • Optical lens view angle: 120° • Focus range: 5mm to infinity • Probe diameter: 8.5mm • Probe length: 42cm (16.5") • PC Interface: USB 2.0 • USB Cable Length: 200cm • Compatible systems: Windows 10/8/7/XP/Vista; MacOS; Chromebook; Android 4.0 and above.

P/N 12-06269



VIVIDIA ABLESCOPE VA-980

Vividia Ablescope VA-980 Semi-Flexible Digital Inspection Camera Borescope has long semi-rigid cable, which can be molded with hand to different shape and keep it. VA-980 has bright LED lights, 8.5mm cable camera and it can be used to look into dark places. VA-980 can be connected to PC, Mac, Android devices

P/N 12-04894



VIVIDIA ABLESCOPE WIFI AIRBOX USB TO WIFI CONVERTER FOR USB DIGITAL BORESCOPES

Vividia W03 WiFi AirBox USB-to-WiFi Converter Adapter for iOS and Android devices for Digital Borescopes and Microscopes is designed to

convert the USB output from USB borescopes and/or microscopes into a WiFi hotspot. It works with UVC (USB Video Camera) that has MJPEG or YUY2 format outputs.

This W03 WiFi AirBox is suitable to your USB digital microscopes, borescopes, cameras, inspection cameras etc... With this device, you can use your iPhone, iPad, Android phones and tablets to access your USB microscopes, borescopes and inspection cameras through WiFi connection. The free app, WIFI Image, can be downloaded from Apple's App Store and Google Play Store

With BatteryP/N 12-05636

Without BatteryP/N 12-05635



VIVIDIA D3145 USB DIGITAL BORESCOPE

- Vividia D3145 USB Digital One-Way Articulating Borescope has 4.5mm diameter camera probe and 1 meter long insertion tube. D3145 can only be bended in one direction, and the maximum bending angle is ~180 degree.

The insertion tube has metal braided outside layers and the bending part is also made with stainless steel, which offers good abrasion resistance. With USB connection, one can connect Vividia D3145 Digital Borescope to a Windows PC (Windows XP, 7, 8 and 10), MacBook, android devices. With VA-B2 AirBox wifi wireless converter and our "AirBox" app from Google Play Store or Apple App Store, one can use own iPhone/iPad or Android device with Vividia D3145 USB articulating borescope.

P/N 12-05430



VIVIDIA D3160 USB DIGITAL BORESCOPE

Vividia D3160 USB Digital One-Way Articulating Borescope has 6mm diameter camera probe and 1 meter long insertion tube. D3160 can only be bended in one direction, and the maximum bending angle is ~180 degree. The insertion tube has metal

braided outside layers and the bending part is also made with stainless steel, which offers good abrasion resistance. With USB connection, one can connect Vividia D3160 Digital Borescope to a Windows PC (Windows XP, 7, 8 and 10), MacBook, android devices. Vividia D3160 Articulating Borescope is an ideal tool for automotive, airplane, aviation, manufacturing, and instrument inspections. The small diameter probe of D3160 borescope makes it good for diesel engine inspection

P/N 12-05428



VIVIDIA CT-4010 LCD/WIFI FLEXIBLE TWO-WAY ARTICULATING BORESCOPE

Vividia CT-4010 LCD/WiFi Waterproof Two-Way Articulating Video Borescope with 4.5" Monitor and 4mm Diameter 1.0 Meter Long Probe.

Features: • Probe diameter 4mm / 0.16", length 1.0 meter / 3.3 ft • Camera HD resolution 1280x720 • Probe is waterproof IP67 and protected with metal braided layers • 2-way articulation with max. bending angle more than 180 degree • Bright LED lights • 4.5" LCD monitor detachable and rechargeable battery • Built-in WiFi function for connection to iPhone iPad Android device.

Specifications: • LCD monitor display: • Monitor size: 4.5" TFT-LCD (850 x 480 pixels) • Monitor connection: Detachable. exchangeable • Monitor material: resistant PC housing • Power: rechargeable lithium battery, 6000 mAh • Key pads: Menu, video, photo shot, LED light adjustment • Languages: 12 languages • Storage: SD card, up to 128G • Photo format: JPEG, 1280x720 • Video format: MOV, 1280x720 • Audio recording: Yes • LED light level: 4 brightness levels

P/N 12-06583

TO

PENETRANT INSPECTION KITS

MAGNAFLUX NDT (NON-DESTRUCTIVE TESTING) KIT

				
1 Preclean inspection area. Spray on Cleaner, wipe off with cloth.	2 Apply penetrant. Allow short penetration period.	3 Wipe to remove Penetrant from surface. Use Cleaner, moistened towel if surface is rough.	4 Shake can and spray on a thin film of Developer.	5 Inspect. Defects will show as bright red lines in white Developer background.

A quick, easy way to make shop and in-field inspections of landing gear, airframe and components. Highly sensitive Spotcheck dye penetrants which give clear, bright red indications. Locates very fine cracks on the surface of ferrous and non-ferrous components, equipment and structures. Reveals cracks on materials with surface temperatures as high as 350°F. Perfect for testing welds before thorough cooling. Convenient spray cans make application easy and contain no fluorocarbon propellants. Non-flammable. Materials meet applicable specifications for dye penetrant inspections (ASME, ASTM and MIL specs). Considered flammable and hazardous by UPS.

MAGNAFLUX SPOTCHECK NDT (NON-DESTRUCTIVE TESTING) - 4 CAN KIT



The lowest priced way to check for cracks, leaks and other defects on any metal parts. Kit includes 1 spray can of developer, 2 cans of cleaner & 1 can of dye penetrant in cardboard case.

4-CAN SPOT CHECK® TEST KIT

SK-416 - Includes: • SKC-S, 2 aerosol cans • SKL-SP2, 1 aerosol can • SKD-S2, 1 aerosol can • SCRUBS® hand cleaner towels, 3 towels • DYKEM® Brite-Mark yellow paint marker, 1 pen • Shop Cloth, 1 towel
Magnaflux 4-can kit - SK-416.....P/N 09-00391
Developer.....P/N SKD-S2
Cleaner/Remover (12oz. Aerosols).....P/N SKC-S

MAGNAFLUX SPOTCHECK NDT (NON-DESTRUCTIVE TESTING) KIT - 8 CAN



In The Box:

- 4 x Aerosol cans of SKC-S cleaner
- 2 x Aerosol can of SKL-SP2 penetrant
- 2 x Aerosol can of SKD-S2 developer.....P/N 09-05791

SKC-S CLEANER

This clear, fast-drying solvent can be used for pre-cleaning, post-cleaning and penetrant removal.

16 oz.....P/N 09-01188
Gallon.....P/N 09-04508
Case (4 Gallons).....P/N 09-04509

SKL-SP2

Because of its vivid red color, this solvent removable dye penetrant provides excellent color contrast performance to locate surface cracks in virtually any metal or non-porous ceramic material.

P/N 09-04661

SKD-S2 DEVELOPER

Made especially for use with SKL-SP penetrant, this developer contains suspended white particles that provide an ideal background for red Spotcheck penetrant indications.

16 oz.....P/N 09-01190
Gallon.....P/N 09-04510
Case (4 Galons).....P/N 09-04511

MET-L-CHEK PENETRANT INSPECTION KITS



FLAMMABLE
Met-L-Chek kits provide a completely portable, job-proven method used throughout the industry to locate cracks, flaws and other defects. These economical & effective kits provide everything needed to make inspections in the shop or field. The penetrant materials are packaged in easy-to-use aerosol spray cans and a can of cleaner included for cleaning parts before inspection. The inspection procedure is easy to learn, accurate and inexpensive. Met-L-Chek can be used on ferrous and non-ferrous materials to find surface defects and 'thru leaks'. Supplied in a rugged metal case with complete instructions. The 4-Can Kit has one aerosol spray of cleaner, penetrant, developer and remover. The 8-Can Kit has 2 cans of each material. Individual replacement cans available.

4-Can Kit (16 Ounces)P/N 09-03040
8-Can Kit (16 Ounces)P/N 09-03052

MET-L-CHEK PENETRANT VP-30



VP-30 is a visible (Type 2), water washable (Method A) and solvent removable (Method C) inspection penetrant. It is designed for use in general metalworking, welding, nuclear and automotive applications for surface flaw and through leak detection. VP-30 has found wide use in the inspection of food and dairy processing equipment such as heat exchangers. Visible penetrants are not rated by sensitivity levels per AMS-2644 but are considered approximate to level 1 fluorescent penetrants. 50μ discontinuities are readily detected and under controlled conditions 30μ size defects may be high lighted by visible penetrants. ISO-3452-2005 does rate visible penetrants by sensitivity level with #2 being the most sensitive. VP-30 is a level 2 per this specifications requirements.....P/N 09-04320

MET-L-CHEK CLEANER/ REMOVER E-59A



E-59A is a class 2 (non-halogenated), Method C inspection penetrant remover. It is designed for use in the solvent wipe technique for penetrant inspection in general metalworking, welding, nuclear and automotive applications. It is a moderate dry rate material and is ideal for penetrant wipe removal and pre-inspection surface cleaning. As a pre-cleaner it is sprayed directly on the test surface. As a penetrant remover it is sprayed onto wiping media and then the penetrant wiped from the surface. The remover should not be sprayed directly on to the test surface to remove the excess penetrant as the sensitivity will be impaired.....P/N 09-04307



MET-L-CHEK DEVELOPER D-70

D-70 has been used by automotive manufacturers to assist in locating oil and gas leaks in engine components and hydraulic lines. The area of interest is cleaned and the developer applied. The engine is run and the oil leak will appear as a dark spot on the white coating. Reminiscent of the old oil and whitening inspection used by railroads before the advent of modern penetrant inspection materialsP/N 09-04303



MET-L-CHEK MPI-1400B FLUORESCENT WET METHOD PARTICLE BATH

MPI-1400B is a premixed, ready-to-use, fluorescent magnetic particle bath available. It is a mixture of MPI-Carrier Fluid C2 and MPI-1400 fluorescent particles. Particle concentration level is ≈ 0.35 in the 100mL centrifuge tube. Aerosols are pressurized with nonflammable, environmentally friendly CO₂.

P/N 09-05862



MET-L-CHEK FP-923 FLUORESCENT INSPECTION PENETRANT

FP-923 is used for the detection of fine cracks, porosity, and through leaks on metals, composites, synthetic materials, and some plastics. The materials used are low in sulfur and halogens, VOC free, and safe for use on all metal surfaces. It is bright yellow, smooth washing and non-gel forming, allowing a clean wash cleanly from rough surface. It is applied by immersion, spray, or wipe on and is approved for high sensitivity aerospace applications.

For Method C applications it is used with E-59, E-59A, R-503, and R-504.P/N 09-05863

TUBE BENDERS – CUTTERS – FLARING TOOLS

LEVER TYPE BENDERS



Each tool bends one size. Open side type slips over tube at any point. Makes smooth short-radius bends up to 180° with minimum effort. No marking, scraping or flattening of tubing. Calibrated to show angle of bend. Wide hook grips tube securely. Suitable for bending annealed copper, aluminum, steel, stainless steel and hard copper tubing of bending temper.

Tubing O. D.	Bender Model No.	Part No.	Bending Radius	Price
1/4"	364-FHA-04	12-20004	9/16"	.
5/16"	364-FHA-05	12-20005	11/16"	.
3/8"	364-FHA-06	12-20006	15/16"	.

IMP® TRIPLE HEADER TUBE BENDER



Calibrated markings for making accurate left-handed, right-handed and offset bends. 90° start requires less effort-making bending fast and easy. For 1/4", 5/16", & 3/8" (6 & 8 mm) O.D. tubing. 15/16" radius to center of tube.(for 1/4",5/16",3/8" OD)

P/N 12-01578

MULTISIZE TUBE BENDER FOR SOFT METAL



Multisize Tube Bender for Soft Metal for Use on Copper, Brass and Aluminum, 3/16 to 3/8 Tube OD. 1" Bend Radius—Bender with 1" bend radius—Copper must be annealed before bending.

P/N 12-06974

BRAIDED STAINLESS STEEL HOSE CUTTER



The AN braided stainless steel hose cutter makes quick work of cutting hoses to length. It features long handles for better leverage and a rubber no-slip grip. It can cut any braided stainless steel line up to size 12 AN.

P/N 12-02574

PLASTIC TUBE SHEAR



Lightweight tubing shear only 3" overall in length, easily cuts all thermoplastic tubing and other types of non-wire reinforced hose.....P/N 12-02580

Pkg' of 5 blades P/N 12-02579

EZ-BEADER TUBING BEADERS



Compact design. Capable of tubing wall thickness from .035 to .065 thick

Size	Description	Part No.	Price
3/4"	EZ-BEADER TP885D	12-00357	.

"IMP" TUBE CUTTER



Designed for use in tight quarters where other cutters won't fit. For 1/8" to 5/8" O.D. tubing. Requires only 13/16" swing radius. Perfect for instrument panels, control cabinets, machine tools, etc. Size: 111/16"x 1-5/16" x 7/8". Wt. 2-1/2 oz. P/N 12-01277

JUNIOR TUBE CUTTER



Exceptionally handy in close quarters - only 3-1/2" overall length. Makes clean, right-angle cuts without flattening tube. Cuts 1/8" to 3/4" O.D. tubing. Enclosed feed mechanism. Wt. 5 oz.

Junior Cutter..... P/N 12-01576

Replacement Cutter Wheel.. P/N 32633

MINI TUBING CUTTER



The mini tube cutter's compact design is ideal for tight spots under sinks and behind appliances. It cuts copper, brass and aluminum tubing from 1/8" to 1 1/8".

P/N 15-07093

MINI TUBING CUTTER



Performs where conventional tubing cutters simply cannot fit. With a 1-1/2" swing radius, the Mini Cutter is ideal for limited-space applications. Accepts tubing sizes from 1/8" to 7/8" in diameter and up to 1/8" in wall thickness. Capable of cutting through copper, aluminum, brass and thin-wall stainless steel.

P/N 12-03348

TUBING CUTTER



Tubing sizes from 1/8" to 1-1/8", and up to 3/16" in thickness. The cutter easily slices through copper, aluminum, brass, stainless steel and other tin-wall tubing. Uses the RW122 cutting wheel. Includes a retractable reamer with dual cutting edges.

P/N 12-03347

COMPOUND TUBING BENDER



Allows you to make precise left, right and offset bends with a simple, hand-held mechanism. The calibrated angle markings indicate 15 degree increments from 0 to 45 degrees for accurate results. Handles 4 popular tubing sizes and comes in a convenient vinyl storage pouch.

P/N 12-03353

ROL-AIR FLARING TOOL 37°



Faceted, hard chrome finished cone rolls out perfect flares above die block, then automatically burnishes flare face. Slip-on yoke permits use in tight quarters. Heat treated dies grip tubing without scoring. Flares and burnishes: 3/16", 1/4", 5/16", 3/8", 1/2" and 5/8" O.D. tubing. Wt. 1-1/2 lbs. Works on some Stainless Steel Tubing but not warranted for Stainless..... P/N 12-01582

ROLO-FLAIR FLARING TOOL 37°



Operates on same principle as Imperial #507-FA but flares 1/8" (primer line) and 3/4" tubing as well. Size: 4"W x 4"D x 8"H. Wt. 2-1/2 lbs. Excellent tool for bench - not for close-quarter work. Not for use on Stainless Steel Tubing..... P/N 12-01575

DELUXE 37° FLARING TOOL



Forms 37° flare to AN standards in steel, stainless steel (including MIL-T 6845), titanium, an other metal tubing. Three rollers in flaring cone roll out 37° flare above die block. Extension on yoke for clamping in vise. Furnished in plastic kit. Wt. 2-1/2 lb.

P/N 12-01579

TO

FLARING TOOLS - BENDERS - RIVET SQUEEZERS



37° DOUBLE & SINGLE LAP FLARING TOOL

Makes flares to AN standards in soft copper and aluminum tubing for 3/16" 1/2" O.D. Also makes single 37° S.A.E. standard and over-size flares. Double Lap Flare: 1/4", 5/16", 3/8". Single Lap Flare: 3/16", 1/2". Wt. 4 lbs. P/N 12-00205



37° DOUBLE & SINGLE LAP FLARING TOOL KIT

Forms 37° double lap flares to AN10078 in soft copper and aluminum tubing (wall thickness to .040"). Also includes a tubing cutter, an inner-outer reamer, and a plastic carrying case. Double Lap Flare: 1/4", 5/16", 3/8". Single Lap Flare: 3/16", 1/2". A quality tool kit which is made in the U.S.A P/N 12-00210



BRAKE LINING & GENERAL RIVET SETS

Deluxe Model (404) - Our deluxe model brake relining tool makes it virtually impossible to botch a brake relining job. The threaded screw action of the rivet insertion tool insures a perfect roll on brake rivets every time without damaging the liner.

Deluxe Model (Threaded)
P/N 12-20810
Punch Non-Threaded / Brake Relining for model Brake Lining Rivet 4X6
P/N 06-02300



PARKER TYPE AIRCRAFT TUBE BEADING TOOL

The Parker Beading Tool has been the number one choice of aircraft mechanics for making clamping beads in metal tubes. To this day, no other tool even comes close to matching its quality. So by special arrangement, the manufacturer tooling up to recreate this classic tool in every detail. In the process they have added a few enhancements of their own,

such as ground, hardened, and polished surfaces for mar-free beads in aluminum, copper, brass, and mild steel tubes ranging from 1/4" to 1" diameter.

- Beads aluminum, copper, brass and mild steel tubes.
- Max wall thickness of tube is 30 thousands.
- Diameters: 1/4", 3/8", 1/2", 5/8", 3/4", 7/8", 1"
- Includes plastic storage case
- ALL SIZES GO IN 1/4" ON THE TUBE BEFORE IT BEADS
- Meets MILSPEC MS33660D and SAE AS5131 standards.

P/N 12-01049

VISIT OUR WEBSITE FOR BEADING SPECIFICATIONS AND KIT CONTENTS.



PROFESSIONAL RIVETING KIT

This Professional Riveting Kit has all the tools you need to drive rivets like a pro... It contains the best-selling ATS Pro Series 3X Rivet Gun, a selection 4 of our most popular Bucking Bars (141, 142, 148, and 149), plus a complete assortment of Rivet Sets to install Universal Head (AN470) or Flush (AN426) rivets in sizes 3/32" to 3/16".

P/N 12-01698

ATS HAND RIVET SQUEEZER



Has a very solid feel, and professional look that will complement anyone's toolbox. Squeezes up to 5/32" aluminum (1/8" steel) rivets. Works with any rivet sets, or dipie dies having a 3/16" (.187") shank. Adjustable ram does not need shims. Lifetime warranty. Features: •1.5" Yoke •Drop forged from Stainless Steel for unmatched strength and durability •Clasic bushed stainless steel finish. •Adjustable ram does not need shims •Squeezes aluminum rivets up to 5/32" and steel rivets up to 1/8" •Comfort grip rubber handles •4lbs shipping weight

P/N 12-01620

PRO HEAVY DUTY RIVET SQUEEZER



1-1/2" Reach. 1-1/4" gap height. 3/16" aluminum rivet capacity. 360 degree swivel head locks yoke locks in any position for greater versatility 5/8" adjustable ram eliminates the need for shims. Longer handles for better leverage. 3/16" aluminum (5/32" steel) rivet capacity. 21" overall length. Does not come with squeezer sets.

P/N 12-04961



RIVET SQUEEZER BENCH UPGRADE KIT

Upgrade kit converts 5011-1 (12-04961) Rivet Squeezers to new bench model. Easy to install. Does not work with older model rivet squeezers.

P/N 12-04962



PNEUMATIC "C" SQUEEZER KIT

Lightweight and has the same power as the Chicago Pneumatic 214C squeezer on which it is based. It accepts the same yokes and attachments as the 214C squeezer, and is powerful enough to squeeze up to 1/8" solid aluminum, or 3/32" solid steel rivets.

Complete kit includes ATS-114C Squeezer with a 1-1/2" yoke (p/n 14-3), a Longeron yoke (14-10), and a 17 piece assortment of squeezer and dimpler snaps. Features: • Compatible with Chicago Pneumatic 214C squeezers • Squeezes up to 1/8" aluminum or steel rivets • Compact only 10" long • Accepts all squeezer and dimpling sets with a .187" shank.P/N 12-03504

Description	Part No.	Price
Squeezer Yoke 1-1/16"	12-03663	.
Yoke, Longeron	12-03664	.
Squeezer Yoke 1-3/16"	12-03665	.
Squeezer Yoke 1-1/2"	12-03666	.
Squeezer Yoke 1-3/4"	12-03667	.
Squeezer Yoke 2-1/2"	12-03668	.
Squeezer Yoke 2-3/4"	12-03669	.
Squeezer Yoke 3"	12-03670	.
Squeezer Yoke 3-7/8"	12-03671	.
Squeezer Yoke 5-5/8"	12-03672	.
Squeezer Set Assortment, 17pc	12-03673	.

ATS DELUXE HAND/BENCH RIVET SQUEEZER KIT



The Rivet Squeezer Kit is designed to take on any riveting task. It contains the new ATS Heavy Duty Rivet Squeezer, a Bench Mount Kit, plus and extra 1-1/2" yoke head to reach into tight areas. You'll also get a complete set of squeezers and dimple dies in a convenient holder. Ats Pro Lifetime warranty. 14 lbs (6.5Kg) shipping weightP/N 12-02406

RIVET SQUEEZERS – RIVET SETS



HANDI-CLAMPS

Handi-Clamps are a specially designed tool for clamping various types of surfaces, shapes and thicknesses. Ideal for holding light plastics, wood, sheet metal and other materials temporarily. The clamping cap is 0-5/16" TP640HC - 1" Jaw Depth P/N 12-02305
TP641HC - 1-1/2" Jaw Depth P/N 12-02306

SIDE GRIP CLAMPS



Side-Grip clamps are designed to clamp at the edge of the work area. Ideal for holding work pieces of all types, particularly during bonding, sealing or gluing operations. Plier-operated. Spring loaded. Constant clamping force. Color-coded for easy identification. Use TP74 or US902 installation tool. Made in the USA

Part No.	Clamping CAP (GAP)	EFF. Body Depth (Reach)	Body Length	Price
12-01161	0-1/2"	1/2"	2-3/16"	.
12-01162	0-3/4"	1/2"	2-7/16"	.
12-01143	0-1/2"	1"	2-3/16"	.
12-02643	0-3/4"	1"	2-7/16"	.

AT-114C3 QUICK-CHANGE RETAINER SPRING



Makes possible the changing of rivet sets without removal of retainer spring. For .402" shank dia. rivet sets.....P/N 12-01079 /Jea.

AT 107A FLUSH RIVET SETS

Large radii at critical points to prevent breakage. Slightly crowned, highly polished face designed for rapid flush riveting where a smooth skin surface is essential. Shank dia. .401".

Part No.	Face Dia.	Length	Price
AT-107A-1	1"	2-3/4"	.
AT-107A-3	1-1/4"	3-3/4"	.

AT 100A STRAIGHT RIVET SETS

Cup surfaces are highly polished and guaranteed to conform with rivet heads. Carried in stock in AN470 (MS20470) universal-head cup shape. Overall length, 3-1/2", .401" dia. centerless-ground shank.

AT-100A-3-3/32.....	3/32"
AT-100A-3-3/16.....	3/16"

AT 101A OFFSET RIVET SETS

Same tool as AT100A but has 10° bend 1" back from the cup to allow added clearance. Permits easier riveting where obstructions are encountered.

AT-101A-3-3/32.....	3/32"
AT-101A-3-3/16.....	3/16"

TATCO HAND RIVET SQUEEZER

This tool was designed and built as a portable low cost solution for both small and large aerospace applications. It is made of aerospace grade stainless steel and heat treated on all wear and deflecting components to 38/42 on the Rockwell Hardness Scale. A large variety of interchangeable yokes are available with ranges from as small as 1.00" to 6.00" reach. It has proven itself over the years as a portable rugged solution, for light to medium duty, rivet squeezing applications.

Model	Dimensions	Part No.	Price
THS-10	1-1/4" Gap x 1" Reach	12-03674	.
THS-15	1-1/4" Gap x 1-1/2" Reach	12-00300	.
THS-20	1-1/4" Gap x 2" Reach	12-03675	.
THS-22	2" Gap x 2" Reach	12-03676	.
THS-25	1-1/4" Gap x 2-1/2" Reach	12-03677	.
THS-30	1-1/4" Gap x 3" Reach	12-03678	.
THS-35	1-1/4" Gap x 3-1/2" Reach	12-03679	.
THS-40	1-1/4" Gap x 4" Reach	12-03680	.
THS-50	1-1/4" Gap x 5" Reach	12-03681	.
THS-100	1" Gap x 2" Reach	12-03683	.
THS-101	1-1/4" Gap x 1-1/2" Reach	12-03684	.

TATCO SQUEEZER YOKES FOR RIVET SQUEEZER

Model	Description	Part No.	Price	Model	Description	Part No.	Price
THY-10	1" Yoke	12-00308	.	THY-40	4" Yoke	12-00322	.
THY-15	1.5" Yoke	12-00309	.	THY-50	5" Yoke	12-00323	.
THY-20	2" Yoke	12-00310	.	THY-100	1" x 2" Yoke	12-03688	.
THY-22	2" x 2" Yoke	12-00315	.	THY-101	No Set Hole	12-03689	.
THY-25	2.5" Yoke	12-00318	.				

SWIVEL HAND RIVET SQUEEZER



This tool incorporates a 3/8" stroke and 5/8" ram adjustment. The full 360° yoke can be locked in any position in relation to the handles. Uses standard squeezer sets with 3/16" shank diameter. Yoke depth: 1-1/2".

Model AT502AH-D P/N 12-00400

INSTRUCTIONS FOR SELECTING RIVET SETS

To develop maximum power, the riveter must drive the rivet near the end of the riveter's stroke. For maximum power the combined length of the two rivet sets must be of the correct length. Determine the correct length as follows:

WHEN TWO CUPPED RIVET SETS ARE USED – The sum of the two rivet sets "L" dimension should equal the closed height dimension of the yoke minus the total thickness of the material being used.

WHEN TWO FLUSH SETS ARE USED – The sum of the two rivet sets "L" dimension should equal the closed height dimension of the yoke minus the overall length of the rivet after it is driven.


WHEN ONE CUPPED SET & ONE FLUSH SET ARE USED – The sum of the two rivet sets "L" dimension should equal the closed height dimension of the yoke minus the total thickness of the material being riveted and the height of the finished rivet head driven by the flush set. If necessary, select rivet sets a little short and shim to proper length with hardened shims listed in the table. The closed height dimension of the yoke referred to above is the opening available when jaws of plunger are in extreme closed or forward position with both rivet sets in place.

RIVET SETS FOR SQUEEZER



Assorted Squeezer Set. 5-piece, consisting of rivet sets for 3/32, 1/8 and 5/32" AN470 rivets, and one flat set. Shank dia. 3/16" P/N 26-5

DIMPLING SETS FOR SQUEEZER



When ordering, specify: Basic Part No. - Rivet Size No. - Body Length, Letter. P/N PER SET 1 PUNCH 1 DIE

FASTENER AN 426 RIVET				
SIZE	3/32	1/8	5/32	3/16
DASH NO.	-3	-4	-5	-6
BODY LENGTH	1/4	3/8	1/2	
AFTER DASH NO.	-P	-R	-S	

Part No.	Price
207/206-3-P	.
207/206-3-R	.
207/206-3-S	.
207/206-4-P	.
207/206-4-R	.
207/206-4-S	.
207/206-5-P	.
207/206-5-R	.
207/206-6-P	.
207/206-6-R	.
207/206-6-S	.

INDIVIDUAL CUPPED SQUEEZER SETS

Rivet Diameter	Body Length ("L" Dim.)	Part Number	Price
3/32"	3/8	AT108AR-3/32	.
3/32"	1/4	12-01661	.
3/32"	1/8	AT108AN-3/32	.
3/32"	1/2	AT108S-3/32	.
1/8"	1/8	AT108AN-1/8	.
1/8"	1/4	12-01660	.
1/8"	1/2	AT108S-1/8	.
1/8"	3/8	AT108AR-1/8	.
3/16"	1/4	12-02680	.
3/16"	1/2	AT108S-3/16	.
3/16"	3/8	AT108AN-3/16	.
3/16"	1/8	AT108AN-3/16	.
5/32"	1/4	12-01662	.
5/32"	3/8	AT108AR-5/32	.
5/32"	1/8	AT108AN-5/32	.
5/32"	1/2	AT108S-5/32	.



FLUSH RIVET SETS

Body Length ("L" Dim.)	Part No.	Price
1/8"	AT109AN	.
3/8"	AT109AR	.
1/2"	AT109AS	.

TO

COUNTERSINK CUTTERS

DIMPLE DIE SETS



The "Spring back" dimple dies are the best-designed dimple dies on the market today. These 100 degree dies are designed to greatly reduce deflection of the sheet metal. This stainless steel tool is built for years of quality service. The 3/16" shaft enables use in most pneumatic and hand squeezes.

#6 Male/Female #6 Screw.....P/N 12-05535
#8 Male/Female #8 Screw.....P/N 12-05536
3/16" Male/Female AN426.....P/N 12-05537

ATS ADJUSTABLE SQUEEZER RAM

Adjustable ram eliminates the need for shims. Simply rotate the set holder until the desired clearance is reached and begin riveting. Made of hardened high strength steel and polished to minimize surface wear.

P/N 12-04968

100° AT455 COUNTERSINK CUTTER

Designed for operating in angle drills with 1/4-28 threads and in the AT441SLS Micro Stop Countersink. Has 1/4-28 threaded shank. Cutter angle 100°. AT455D-4 has 7/16" dia. cutter head. Use with AT484 pilots.

P/N AT455D-4

AT484 PILOTS

AT484 replaceable pilots have a .086" dia. shank with a flat to accommodate the set screw of the AT455 cutter. An undercut permits the head to seat on the cutter angle. Order by P/N ea.

Part No.	Head Dia. "D"	Part No.	Head Dia. "D"
AT484-2	#40	AT484-56	3/32
AT484-12	#30	AT484-57	1/8
AT484-21	#21	AT484-59	5/32
AT484-31	#11	AT484-61	3/16
AT484-32	#10	AT484-63	7/32

AT441 HSS MICROSTOP COUNTERSINK



AT441 HS Micro Stop Countersink, similar to the AT442SLS unit, except with 1/4-28 female threaded nose to accommodate AT455 cutter.

P/N 12-01591

FLUSH RIVET SET WITH RUBBER RING



Features a rubber ring around the face to reduce slippage and to prevent damage to aircraft skin. Face Diameter: 1 1/4". Shank: 0.401".

Rivet Set P/N 12-03361.....
Replacement Rubber Ring... P/N 12-03362.....

MICRO-STOP COUNTERSINK CAGES AND NYLON FOOT PIECE



2 Models available-one with NEEDLE bearing and one with BRONZE bushings. .001" increment depth adjustment. Positive adjustment lock. 1/4" dia. shank. 9/32" shaft travel. 9/16" cutter capacity. For 1/4-28 threaded cutters. Comes with "NO-MAR" foot piece. Rated at 3,000 RPM. Made in USA.

with Bronze Bushings..P/N 12-01412

with Needle Bearings...P/N 12-00940

AT 409 SERIES STRAIGHT SHANK COUNTERSINK WITH INTERCHANGEABLE CUTTERS AND PILOTS



Assembly, consists of AT418E (1/2") cutter, AT416 pilot and AT409-1, 1/4" straight-shank. Has a collet-type shaft to securely hold the replaceable pilot.

When ordering specify: Part number of cutter and pilot dia.

Assembly Example: AT409 with 100° cutter A418E & 1/8 pilot. (AT416-57) Adapter only

P/N AT409-1.....

AT418 STOP COUNTERSINK CUTTERS




Three-straight flute replaceable pilot cutters with female thread. These cutters are designed with extra deep flute to permit numerous resharpenings and radial clearance to assure fast smooth cutting.

For Replaceable Pilots Refer to AT416 Series.Used With AT418

Part No.	Cutter Dia.	Thread Size	Pilot Hole	Price
AT418A-4	1/4"	1/4 - 28	.086	.
AT418D-4	7/16"	1/4 - 28	.086	.
AT418E-4	1/2"	1/4 - 28	.086	.

120° AT418 COUNTERSINK CUTTER



Same type cutter as described above except with 120° Cutter Angle. 7/16" Cutter Diameter.

P/N AT418D-7

AT416 PILOTS

Fit AT418 cutters. Undercut permits head to seat on cutter angle. Order by Part No. in table below.

Order by part Number. Ea.

Part No.	Head Dia. "D"	Part No.	Head Dia. "D"
AT416-2	#40	AT416-56	3/32
AT416-12	#30	AT416-57	1/8
AT416-21	#21	AT416-59	5/32
AT416-31	#11	AT416-61	3/16
AT416-32	#10	AT416-63	7/32
		AT416-65	1/4

COUNTERSINK SETS



Countersinks made of high-speed steel, 3-fluted and 14" - 28 threaded. Set includes #40, #30, #21, #10, and 1/4".

Countersink 82 degree 5 pc. set.....P/N 12-02883

Countersink 120 degree 5 pc. set.....P/N 12-02884

SNAP SOC RIVET SET CAPS



Insert these caps onto the ends of your rivet sets to provide a protective zone between the rivet set and the rivet. Helps to prevent against damage to the rivet or adjoining aircraft skin. Color coded for easy use. Each cap lasts for approximately 50-70 rivets. **Note: Rivet Set pictured is not included.**

Color	Size	Part No.	Price
White	3/32"	12-03363	.
Green	5/32"	12-03365	.
Yellow	3/16"	12-03366	.
Blue	1/4"	12-03367	.



DIE GRINDER MANDREL

Die Grinder Arbor (Mandrel). Holds your cutoff wheels. It has a 1/4" shank for use in most drills and die grinders. Can accommodate either 1/4" or 3/8" cutoff wheel through hole sizes. P/N 12-02924

SEAMERS - SQUEEZERS - PUNCHES

HAND SEAMER



Handy tools for comparatively light work. Wide, deep jaws machined for smooth parallel fit. Form precise folds and seams. Strong, lasting drop-forged steel construction. No. 44 has plain 3 1/2" wide blades. No. 44r is similar with a radius to prevent tearing of aluminum and other light metals. No. 793 has a 3 1/2" wide blade with adjustable depth gauge.

P/N 12-00620

HAND SEAMER



Makes permanent, tight fitting seams. Strong, lasting construction. Jaw Size: 1" D x 3-1/2" W. Overall Length: 8" (203 mm). Weight: 1.1 lbs (0.5 kgs)P/N 12-03751

ROPER-WHITNEY NOTCHER



Designed for fast, accurate 32° notch in sheet metal. Hook design of jaws permits notching to exact desired depth without slippage. Spring-return jaws. Capacity 20 ga. Wt. 1 lb. P/N 141

HOLE FLANGING TOOL



A real time saver for flanging lightening holes. Non-marring. Easy to use. Nylon rollers and ball bearings assure long life...P/N 12-00600

PRO PNEUMATIC C DOUBLE FORCE SQUEEZER



The ATS Tandem C-Squeezer incorporates two pistons to deliver twice the force of a standard squeezer at the same air pressure. Its lightweight, compact, and efficient design is modeled after the industry standard Chicago Pneumatic 0214-C squeezer.

The parts are completely interchangeable, and it will accept any jaws and accessories compatible with the 0214-C. With enough force to squeeze up to 3/16" solid aluminum, or 5/32" mild steel rivets, this riveter will easily fit most of your riveting needs without breaking your budget.

P/N 12-04980

ATS DUAL SUPER DUTY RIVET SQUEEZER



The Dual Squeezer Kit features a whole 3" squeezer! Included in the kit is a Stainless Steel Rivet Squeezer with a 1 1/2" yoke, as well as 3" yoke. ATS also includes a 17 piece dimple die set, and rivet gauges to get the job done right. Finally, all of this comes in a custom foam lined case.

P/N 12-05451

ATS FIELD RIVETING KIT (2X)



The ATS Pro Field Kit features the line tools. In it you get the best-selling Palm Drill (featuring a true variable speed trigger from 0 to 2600 RPM), plus an assortment of cobalt drill bits in the 4 most commonly use sizes (#40, #30, #21, and #12). For perfect riveting jobs, ATS gives you the top of the line Pro Rivet Gun with feather trigger

(including springs), two of the most popular Tungsten bucking bars, and a full set of riveting snaps. ATS has even thrown in a set of rivet gauges to make sure you get things right, and a bottle of oil to keep those tools running at peak performance. It all comes to you in a quality shadow-foamed hard tool case, making this the kit you will want to show off!

Black.....P/N 12-05448

ROPER-WHITNEY METAL PUNCH



#5 JR. HAND PUNCH

with one ton punching power. Punches 1/4" hole through 16 Ga. mild steel. Throat clearance 1-3/4". Complete set in metal box with 3/32, 1/8, 5/32, 3/16, 7/32, 1/4 and 9/32" punches & dies. Wt. 4-1/4 lbsP/N 12-01600



BENCH MOUNT BASE

For stationary use. Base swivels to any position. Punch is held by L-shaped clamp rod through a 7/16" or larger hole in bench.....P/N 12-01700

STRAIGHT PUNCH & DIE SETS

for No. 5 Jr. punch in the seven sizes shown below.

Size	Part No.	Price
3/32"	12-01800	.
1/8"	12-01900	.
5/32"	12-02000	.
3/16"	12-02100	.
7/32"	12-02200	.
1/4"	12-02300	.
9/32"	12-02400	.



ORIGINAL LANCASTER PORTO-METAL FORMER



BACK FRONT

The Porto-Metal Former makes the specialty angle needed in minutes. Can be used on the work bench or in a vise to make inside angles, outside angles, straight bends - even circles, to a radius as small as 3". Jaws are made of hardened alloy steel. Works 18 gauge soft steel, 20 gauge stainless, 16 gauge aluminum up to 2" in width. 45 to 1 leverage for powerful press. Special malleable iron body will not break as we have found with cheaper imitations. Order #LSH-71 metal shrinker for inside angles. Order #LST-82 stretcher for outside angles. Wt. 12 lbs. each.

#LSH-71 Shrinker.....P/N 12-19800
#LST-82 Stretcher.....P/N 12-19900
Combination Shrinker/Stretcher Tool.....P/N 12-02950

Either unit can be converted into its opposite by ordering complete conversion kit, includes jaws, blocks & wire.

SKYBOLT SK2018 SET COMPLETE ZLOC ASSEMBLY WITH DIES

Skybolt SK2018 SET Complete ZLOC Assembly with dies. In The Box: • SK2018C Clamp • 9 Zloc Die Sets • Press Adapter • Dimple Tool Adapters.

P/N 04-04102



HAND PADS

Faster, cleaner, and more durable than wire brushes, scrapers and sandpaper. Non-woven nylon pads are pre-cut. They provide conformable, consistent finishes. General Purpose and Ultra Fine Pads may be used with lubricants and solvents. **General Purpose** • Clean up dirty parts in solvent tank • Light corrosion removal on steel and aluminum parts **Commercial** • An aggressive hand pad for waterbased products only • Not to be used with solvents. **Heavy duty** rust removal and general cleanup • **Ultra Fine** • For scuffing in new rod and main bearings. Light corrosion removal on steel and aluminum parts.

Description	Size	Grain	Color	Qty.	Part No.	Price
General Purpose	6" x 9"	A/O	Maroon	1 each	12-00861-1	.
Ultra Fine	6" x 9"	S/C	Gray	1 each	12-00862	.
Heavy Duty	6" x 9"	A/O	Tan	40 pack	12-00864	.
Hand Pad Holder	-	-	Orange	1 Hand Pad Holder, 4 Sanding Pads	12-00865	.

CHERRY RIVET TOOLS

HYDRO-SHIFT CHERRYLOCK® RIVETER



Specifically for the installation of all CherryLOCK® Rivets. Recommended primarily for 1/4" diameter CherryLOCK® rivets. It can be used to install all diameters and lengths as indicated on the tool capacity charts. Low recoil, low noise and a comfortable fit in the operator's hand. The H681 Series pulling heads fit directly on this tool to install both bulbed and standard NAS type 2000 Series CherryLOCK® Rivets. With the proper adapters and pulling heads, this tool can install other types of rivets.....P/N 12-02983



LOCKBOLT POWER RIVETER G84

For high speed, reliable installation of the most popular sizes of aircraft Lockbolts. Incorporates a bayonet attachment for quick change of pulling heads. This tool can also be used to install blind bolts and blind rivets. A comfortable grip for one handed operation in any position. Compatible with Huck 352 & 230 riveter pulling heads.....P/N 12-03011

LOCKBOLT POWER RIVETER TOOL KIT G84LBK

Installs: 5/32" & 3/16" & 1/4" NAS Style. LockBolt **Includes:** G84 LockBolt Power Riveter - Stroke: 9/16", Pulling Force: 5, 750 lbs (2,608 kgs), Weight: 7.7 lbs (3.5 kgs). H513-08-35 Pulling Head. H513S-05-20 Pulling Head Cherry 5/32" D LockBolt. H513S-06-20 Pulling Head MaxiBolt 3/16" LockBolt. P1395 Molded Carrying Case. 269C5 Grip Gauge LockBolt. 670A20 Stem Catcher Bag. 700A77 Bleeder Bottle. All Necessary Manuals. P/N 12-03013

CHERRY RIVETER SERVICE KIT G84KS

All the seals, 'O'-rings, gaskets and hardware required for routine maintenance of your Cherry blind riveters. A must for any in-house repair facility. For Tool G84. P/N 12-03012

LIGHTWEIGHT LOCKBOLT RIVETER TOOL KIT G83AKT

Installs: 5/32" & 3/16" MS Blind Bolt & LockBolt, 1/8", 5/32" & 3/16" Cherry MAX **Includes:** G83 Lightweight LockBolt Hand Riveter - Stroke: 7/16", Pulling Force: 3, 750 lbs (1, 701 kgs), Weight: 4.95 lbs (2.3 kgs). H513S-05-20 Pulling Head Cherry 5/32" D LockBolt. H513S-06-20 Pulling Head 3/16" LockBolt. H701B-456 Pulling Head Straight 3/4" x 1 3/4". H753A-4562 CherryMAX Pulling Heads RT Angle 2 1/4" x 5 7/16" x 3/8". H781-456 Cherry Pulling Head Offet 1/8"-5/32"-3/16". H83B-5MB Pulling Head MaxiBolt 5/32"D. H83B-6MB Pulling Head MaxiBolt 3/16" D G83/G84. P1393 Plastic Box. 269B12 MaxiBolt Gauge. 269C3 CherryMAX Grip Gauge. 269C5 Grip Gauge LockBolt. 670A20 Stem Catcher Bag. 700A77 Bleeder Bottle. 744-300 Adapter. All Necessary Manuals P/N 12-03008

LIGHTWEIGHT LOCKBOLT RIVETER TOOL KIT G83BKT

Installs: 5/32" & 3/16" MS Blind Bolt & NAS Style LockBolt **Includes:** G83 Lightweight LockBolt Hand Riveter - Stroke: 7/16", Pulling Force: 3, 750 lbs (1, 701 kgs), Weight: 4.95 lbs (2.3 kgs). H513S-05-20 Pulling Head Cherry 5/32" D LockBolt. H513S-06-20 Pulling Head 3/16" LockBolt. H83B-5MB Pulling Head MaxiBolt 5/32"D. H83B-6MB Pulling Head MaxiBolt 3/16" D G83/G84. P1393 Plastic Box. 269B12 MaxiBolt Gauge. 269C5 Grip Gauge LockBolt. 670A20 Stem Catcher Bag. 700A77 Bleeder Bottle. All Necessary Manuals.....P/N 12-03009

CHERRY RIVETER SERVICE KIT G83KS

All the seals, 'O'-rings, gaskets and hardware required for routine maintenance of your Cherry blind riveters. A must for any in-house repair facility. For Tool G83. P/N 12-03010

LIGHTWEIGHT LOCKBOLT RIVETER G83



Designed for high speed, reliable installation of the most popular sizes of aircraft Lockbolts. By bending the rubber pin deflector sideways, 1-1/2" additional clearance can be obtained. This tool can also be used to install blind bolts and blind rivets. A comfortable grip for one handed operation in any position. Compatible with Huck 352 & 230 riveter pulling heads. Stroke: 7/16". Pulling Force: 3, 750 lbs (1, 701 kgs). Weight: 4.95 lbs (2.3 kgs).....P/N 12-03007

CHERRY RIVETER SERVICE KIT G800KS

All the seals, 'O'-rings, gaskets and hardware required for routine maintenance of your Cherry blind riveters. A must for any in-house repair facility. For Tool G800. P/N 12-03006

CHERRYMAX HYDRAULIC HAND RIVETER G800

The G800 is an ergonomic, lightweight hand powered riveter capable of installing a wide variety of blind fasteners. The all metal design makes this compact and robust tool ideal for use in rugged shop environments or field repair. Exceptional power with low hand effort for increased productivity. Mounting system (same as G704B) compatible with popular pulling heads including H782, H781-456& H753A-456. Leak-proof design with advanced seals & built-in redundancies. Ergo design with internal shock absorber & cushioned handle. Adjustable lever easily accommodates different hand sizes. Stroke: 3/4". Pulling Force: Up to 6000 lbs. Weight: 1.7 lbs (0.8 kgs)P/N 12-03004

CHERRYMAX HYDRAULIC HAND RIVETER KIT G800CRM

G800CRM CherryMAX Hydraulic Hand Riveter Kit **Includes:** G800 CherryMAX Hydraulic Hand Riveter - Stroke 3/4", Pulling Force up to 6000 lbs, Weight 1.7 lbs. H781-456 Pulling Heads. H753A-456 Pulling Heads. 269C5 Grip Selector Gauge. 269B12 Grip Selector Gauge. Molded Plastic Case. All Necessary Manuals (except -6 all aluminum) P/N 12-03005

CHERRY RIVETER SERVICE KIT G784KS

All the seals, 'O'-rings, gaskets and hardware required for routine maintenance of your Cherry blind riveters. A must for any in-house repair facility. For Tool G784. P/N 12-03002

NUT-PLATE RIVETER G702A

The G702A is a pneumatic-hydraulic tool designed specifically for installation of nut plate rivets. Its durable, all metal housing makes this tool ideal for use in rugged shop environments. The H702-3NPR pulling head fits directly on the tool to install -3, -4, 2.5 mm & 3mm nut plate rivets. 10° angled head allows user to work using a natural hand position. A comfortable grip for one handed operation in any position. Air Pressure: 90 PSI (6.2 bar) min./110 PSI (7.6 bar) max. Cycle Time: approximately one second. Noise Level: 71 dB (A). Vibration: less than 2.5 m/s². Air Consumption: .09 SCF / cycle (2.55 L / cycle). Stroke: 3/4". Pulling Force: 1,100 lbs (499 kgs). Weight: 3.5 lbs.P/N 12-02985

CHERRYLOCK POWER RIVETER KIT G784CLRB

Includes: G784 Cherry Universal Power Riveter 12" High, 8 lbs., 15/16" Stroke. P1395 Molded Carrying Case. TLC852 CherryLock Selector Card. TLC864 CherryLock Process Manual. 269C3 CherryMAX Grip Gauge. 700A77 Bleeder Bottle. **Note:** No Pulling Heads Included. P/N 12-03001

CHERRYLOCK POWER RIVETER G784

Installation of CherryLOCK rivets. Will install nearly all diameters of CherryLOCK rivets up to a half-inch grip, 'A' group only. With proper adapters & pulling heads this tool can be used to install other types of rivets. A comfortable grip for one handed operation in any position. Pulling heads not included with riveter. Air Pressure: 90 PSI (6.2 bar) min./110 PSI (7.6 bar) max. Noise Level: 69.7 dB (A). Vibration: less than 2.5 m/s². Air Consumption: .27 SCF / cycle (7.65 L / cycle). Stroke: 7/8". Pulling Force: 2,600 lbs (1, 179 kgs). Weight: 8 lbs (3.6 kgs)P/N 12-02998

POWER RIVETER G747

Installation of CherryMAX and nut plate rivets. This tool utilizes straight, offset and right angle pulling heads, all of which can install -4, -5 and -6 diameter CherryMAX bulb type rivets in all head styles, materials and grip lengths. Extensions are available for extending the pulling heads to reach limited access areas. 10° angled head allows user to work using a natural hand position. A comfortable grip for one handed operation in any position. Same weight as the G702A, with the power of much larger toolsP/N 12-02995

CHERRY RIVET TOOLS



CHERRYLOCK POWER RIVETER KIT G784CLRA

Installs: 1/8" to 3/16", NAS 1398/9. Type & Cherry Lock. **Includes:** G784 Cherry Universal Power Riveter 12" High, 8 lbs., 15/16" Stroke. H681-4C CherryLock H681 Pulling Heads Dia. 1/8" Dim. A=208 B=341. H681-5C CherryLock Pulling Head 5/32" D. H681-6C CherryLock H681 Pulling Heads Dia. 3/16" Dim. A=335 B=386. P1395 Molded Carrying Case. TLC852 CherryLock Selector Card. TLC864 CherryLock Process Manual. 269C3 CherryMAX Grip Gauge. 700A77 Bleeder Bottle. P/N 12-02999



CHERRY RIVETER SERVICE KIT G747KS

All the seals, 'O'-rings, gaskets and hardware required for routine maintenance of your Cherry blind riveters. A must for any in-house repair facility. For Tool G747. P/N 12-02996



CHERRY RIVETER SERVICE KIT G746KS

All the seals, 'O'-rings, gaskets and hardware required for routine maintenance of your Cherry blind riveters. A must for any in-house repair facility. For Tool G746A. P/N 12-02994



CHERRY RIVETER SERVICE KIT G704KS

All the seals, 'O'-rings, gaskets and hardware required for routine maintenance of your Cherry blind riveters. A must for any in-house repair facility. For Tool G704B. P/N 12-02990



CHERRY RIVETER SERVICE KIT G689KS

All the seals, 'O'-rings, gaskets and hardware required for routine maintenance of your Cherry blind riveters. A must for any in-house repair facility. For Tool G689. P/N 12-02984

BLIND BOLT RIVETER TOOL KIT G84-MBK



Installs: 5/32", 3/16" & 1/4" MS Blind Bolt
Includes: • G84 Power Riveter Cherry- Stroke: 9/16", Pulling Force: 5, 750 lbs (2,608 kgs), Weight: 7.7 lbs (3.5 kgs) • H83B-5MB Pulling Head MaxiBolt 5/32" D • H83B-6MB Pulling Head MaxiBolt 3/16" D G83/G84 • H84A-8MB Pulling Head MaxiBolt 1/4" D G84 • P1395 Molded Carrying Case • TLC872 Cherry MaxiBolt Card • 269B12 MaxiBolt Gauge • 670A20 Stem Catcher Bag • 700A77 Bleeder Bottle. P/N 12-03015

CHERRYMAX POWER RIVETER KIT G747CMR



Installs: NAS 9301 to 9312 (1/8" to 3/16"). MS90353/4. MS21140/1. TAF "S" TYPE (1/8" & 5/32"). MS20604/5 (3/32"). **Includes:** G747 Cherry Lightweight - Installs CherryMAX Rivets. H701B-456 Pulling Head Straight 3/4" x 1-3/4". H747-3NPR Pulling Head. H753A-456 CherryMAX Pulling Heads RT Angle 2-1/4"x5-7/16"x3/8". H781-456 Cherry Pulling Head Offset 1/8"-5/32"-3/16". P1393 Plastic Box. 269C3 CherryMAX Grip Gauge. 670A20 Stem Catcher Bag. 700A77 Bleeder Bottle. All Necessary Manuals. P/N 12-02997

CHERRY POWER RIVETER KIT G746ACMRB



Installs: -4, -5, -6 CherryMAX. **Includes:** G746A Power Riveter Cherry 1/8", 5/32", 3/16" "A" Rivets. H701B-456 Pulling Head Straight 3/4" x 1-3/4". H753A-456 CherryMAX Pulling Heads RT Angle 2-1/4"x5-7/16"x3/8". H781-456 Cherry Pulling Head Offset 1/8"-5/32"-3/16". P1393 Plastic Box. 269C3 CherryMAX Grip Gauge. 670A20 Stem Catcher Bag. 700A77 Bleeder Bottle. All Necessary Manuals. P/N 12-02992



CHERRYLOCK POWER RIVETER KIT G746ACMRW

Installs: SST & -3, -4, -5, -6. CherryLock 'A'. **Includes:** G746A Power Riveter Cherry 1/8", 5/32", 3/16" "A" Rivets. H955-3 Pulling Head. H955-4 Pulling Head H955-5 Pulling Head. H955-6 Pulling Head. P1393 Plastic Box. 269C3 CherryMAX Grip Gauge. 670A20 Stem Catcher Bag. 700A77 Bleeder Bottle. All Necessary Manuals. P/N 12-02993

CHERRY POWER RIVETER KIT G704BCMR



Installs: -4, -5, -6 CherryMax. **Includes:** 6704B Power Riveter - Cap = 1/8-3/16" Wt. = 4 1/2 lbs. H701B-456 Pulling Head Straight 3/4" x 1-3/4". H753A-456 CherryMAX Pulling Heads RT Angle 2-1/4"x5-7/16"x3/8". H781-456 Cherry Pulling Head Offset 1/8"-5/32"-3/16". P1393 Plastic Box. TLC816 CherryMAX Process Manual. TLC865 CherryMAX Selector Guard. 269C3 CherryMAX Grip Gauge. 670A20 Stem Catcher Bag. 700A77 Bleeder Bottle. P/N 12-02988



CHERRY CHERRY HAND NIPPER

Used for flush trimming Cherry rivets. P/N 12-02977



GRIP GAUGE LOCKBOLT

Cherry Grip Gauge Lockbolt. Material thickness & grip.... P/N 12-02979



MAXIBOLT GRIP GAUGE 269B12

Cherry Maxibolt Grip Gauge 269B12. P/N 12-02978



CHERRYMAX GRIP GAUGE

Rivet Grip & Diameter Gauge. P/N 12-00217



POWER RIVETER G746A

Pneumatic-hydraulic tool designed specifically for installation of CherryMAX Bulb, CherryMAX 'AB' wiredraw and CherryLOCK 'A' wiredraw rivets. Ideal for use in rugged shop environments. This tool utilizes straight, offset and right angle pulling heads. A comfortable grip for one handed operation in any position. Stroke: .875". Pulling Force: 1,850 lbs (839 kgs). Weight: 4.25 lbs (1.9 kgs). P/N 12-02991



G84-LS SPLIT POWER RIVETER

Designed for high-speed, reliable installation of the most popular sizes of blind rivets, lockbolts and blind bolts. Fastener installation in many limited access areas and also reduces operator fatigue. This tool installs all Lockbolt, blind bolts and blind rivets to 1/4" diameter, as well as Cherry rivetless nut plate in all sizes. Stroke: 0.53". Pulling Force: 5700 lbs (2608 kgs). Weight: 11.8 lbs (5.4 kgs). P/N 12-03014



LOCKBOLT HEAVY-DUTY POWER RIVETER G87D

Heavy-duty production tool designed for high speed, reliable installation of the most popular sizes of aircraft Lockbolts. Ideal for use in rugged shop environments. By bending the rubber pin deflector sideways, 1-1/2" additional clearance can be obtained. This tool can also be used to install blind bolts and blind rivets. Stroke: 9/16". Pulling Force: 9,500 lbs (4,309 kgs). Weight: 10.75 lbs (4.9 kgs). P/N 12-03016



SPLIT POWER RIVETER G704B-40SH

Installation of CherryMAX rivets in applications with extremely limited access. Equipped with an 8 foot hose. Pulling heads not included with riveter. Hose Length: 8'. Stroke: .518". Pulling Force: 3136 lbs (1423 kgs). Weight: 4.5 lbs (2.0 kgs) (power unit only). P/N 12-02987



SPLIT POWER RIVETER G704B-SR

Designed specifically for the installation of CherryMAX rivets in applications with extremely limited access. Equipped with an 3 foot hose. Pulling heads not included with riveter. Hose Length: 3'. Stroke: .518". Pulling Force: 3136 lbs (1423 kgs). Weight: 4.5 lbs (power unit only). P/N 12-02989



NUT-PLATE RIVETER G902 (FEED THROUGH)

All-pneumatic tool designed specifically for installation of nut plate rivets. This tool utilizes straight pulling heads which can install 3/32" and 1/8" pull-through type nut plate rivets and 3/32" CherryLOCK 'A' rivets. Stroke: 3/4". Pulling Force: 550 lbs (250 kgs). Weight: 2 lbs (0.9 kgs). P/N 12-03017



NUT-PLATE RIVETER G902-15 (SIDE EJECT)

The G902-15 (side eject) is an all-pneumatic tool designed specifically for installation of nut plate rivets. This tool utilizes straight pulling heads which can install 3/32" and 1/8" pull-through type nut plate rivets and 3/32" CherryLOCK 'A' rivets. Stroke: 3/4". Pulling Force: 550 lbs (250 kgs). Weight: 2 lbs (0.9 kgs). P/N 12-03018



CHERRY HAND RIVETER G30

Pulling head is integral part of tool. Great in areas with limited access or power limitations. The G30 is an efficient, compact and lightweight tool for installing Cherry LOCK 'A' rivets. Overall length: 9 1/4" (23.5cm). Weight 0.8 lbs.. P/N 12-02982

CHERRYLOCK POWER RIVETER TOOL KIT G784KT

Includes: • G784 CherryLock Power Riveter - Stroke: 7/8", Pulling Force: 2,600 lbs (1, 179 kgs), Weight: 8 lbs (3.6 kgs) • B36B740 Valve Spring Installation Tool • B37B740 Valve Sleeve Removal Tool • 74DA43 Shift Piston Tool • 680A114 Seal Guide • 680A114 1 1/2" End Cap Socket Wrench • 680A48/49 Clamp Wrench • 700B65 Packing Plug Wrench • 740A43 Power Cylinder Tool • 700A61 Piston Rod Wrench • P1178 Valve Plug Extractor • 700A60 Seal Guide ..P/N 12-03003

TO

CHERRY PULLING HEADS

PULLING HEAD FOR CHERRYLOCK® A-RIVETS H9055

STEM SIDE EJECTION: H9055 series pulling heads are available for installation of 3/32", 1/8", 5/32" and 3/16" diameter locked spindle CherryLOCK® 'A' code rivets in all materials, head styles and grip lengths. Stems are ejected from the side of the pulling head.

H9055-3: 3/32"	P/N 12-03132
H9055-4: 1/8"	P/N 12-03133
H9055-5: 5/32"	P/N 12-03134
H9055-6: 3/16"	P/N 12-03135

CHERRY® MS STRAIGHT PULLING HEADS H9040

Cherry MS Straight Pulling Heads - H9040 Series.

H9040-4C	P/N 12-03127
H9040-5C	P/N 12-03128
H9040-6C	P/N 12-03129
H9044-8C	P/N 12-03130

OFFSET MAXIBOLT PULLING HEAD H856-6MB

Maxibolt Pulling Head. Offset head style. Maxibolt Diameters: 3/16".

P/N 12-03112

CHERRY® NUT PLATE PULLING HEADS H902

These pulling heads fit directly onto Cherry G902 and G746A Power Riveters.

Cherry P/N	Rivet Dia. Inches	Part No.	Price
H902-3NPR	-3 (3/32")	12-03125	.
H902-4NPR	-4 (1/8")	12-03126	.

CHERRY® FLUSH STYLE PULLING HEADS H9015

Flush style pulling heads will install both universal and countersunk rivets. These pulling heads fit directly onto Cherry G902-15 riveters.

H9015-3C	P/N 12-03121
H9015-4C	P/N 04-01515
H9015-5C	P/N 12-03123
H9015-6C	P/N 12-03124

PULLING HEADS FOR CHERRYLOCK A-RIVETS H955

The H955 Series pulling heads fit directly on the G701A, G704B, G746A and G747 riveters. The heads in this series are capable of installing 3/32", 1/8", 5/32" and 3/16" diameter rivets in all materials and head styles and grip lengths. Stems feed through the pulling head and are ejected out the back of the tool.

H955-3: 3/32"	P/N 12-03136
H955-4: 1/8"	P/N 12-03137
H955-5: 5/32"	P/N 12-03138
H955-6: 3/16"	P/N 12-03139

COMPACT UNIVERSAL HEAVY DUTY PULLING HEAD HD800

Description	Part No.	Price
HD800-6MB Installs Maxibolt -6 "S" type Cherry	12-03140	.
HD800-6MBU Installs Maxibolt -6 "U" type / "S" type AFS	12-03141	.
HD800-8MB Installs Maxibolt -8 "S" type	12-03144	.
HD800-8MBU Installs Maxibolt -8 "U" type	12-03145	.
HD800 Installs CherryMAX "AB" -8 (all materials) 8 Dia. MB Plus	12-03142	.
HD800-8A Installs Cherrylock "A" code	12-03143	.

CHERRY OFFSET PULLING HEAD H782

The Cherry® brand H782 is a new universal, off-set pulling head capable of installing a broad variety of pull-type fasteners. Its strength, light weight and compact dimensions make it ideal for a diverse range of applications including restricted spaces. The H782 is capable of installing CherryMAX rivets, CherryLOCK® 'A' code rivets, MaxiBolt 'S' type blind bolts, MBC rivets, SPR rivets, NAS1398 A & AB code products, MS90353/4, MS21140/1, 4, 5, NAS1719, 1720 & 1721 and pull-through type nut plate rivets. **Note:** Uses CherryMAX mounting system (G704B, G746A, G747).

P/N 12-03091

MAXIBOLT STRAIGHT PULLING HEADS

For use with G83 & G84 tools. For use with Cherry shift washer type only.

H83B-6MB	P/N 12-03101
H84A-8MB	P/N 12-03107
H84C-8MB	P/N 12-03110

MAXIBOLT PULLING HEAD H84B-568

Maxibolt Pulling Head. Straight head style. Maxibolt Diameters: 5/32", 3/16".

P/N 12-03109

MAXIBOLT PULLING HEAD (S TYPE) H744

Cherry P/N	Head Style	MaxiBolt Dia.	Part No.	Price
H744-5MB	Straight	5/32"	12-03085	.
H744-6MB	Straight	3/16"	12-03086	.

MAXIBOLT U-TYPE PULLING HEAD

Pulling heads to install "U" type Maxibolts®. Will fit G83 or G84-LS (w/744-700 adaptor).

H83B-5MBU	P/N 12-03099
H83B-6MBU	P/N 12-03102
H84A-8MBU	P/N 12-03108
H84C-8MBU	P/N 12-03111

MAXIBOLT® PULLING HEAD (S TYPE) H652-8MB

Cherry MaxiBolt Pulling Head (S Type): Head Style - Straight, MaxiBolt Diameter - 1/4"

P/N 12-03067

MAXIBOLT RIGHT ANGLE PULLING HEAD H828

This pulling head aids installation of MAXIBOLTS in limited access applications. For use with G744 tool. For use with Cherry shift washer type only. Use 744-200 adapter for G83/G84.

Cherry P/N	Head style	Rivet Dia. Inches	Part No.	Price
H828-5MB	Right Angle	5/32"	12-03094	.
H828-6MB	Right Angle	3/16"	12-03095	.
H828-8MB	Right Angle	1/4"	12-03097	.

RIGHT ANGLE PULLING HEAD H690-4C

H690-4C pulling head. 1/8" rivet diameter. Countersunk Head.

P/N 12-03082

PULLING HEAD FOR CHERRYLOCK® "A" CODE RIVETS H9044-8

These heads fit directly on the G55, G86, both obsolete and G740 Cherry® power riveters. Will fit on the G784 and G689 hydro-shift Cherry® riveters with the 680B57 adapter. For the 1/4" Cherrylock "A" rivets. 8 Diameter.

P/N 12-03131

CHERRYMAX STRAIGHT PULLING HEAD H846A-456

This pulling head installs 1/8", 5/32" & 3/16" Nominal & Oversize CherryMAX Rivets (G744 only)

P/N 12-03103

CHERRYMAX RIGHT ANGLE PULLING HEAD H828-8

CherryMAX Right Angle Pulling Head installs 1/4" Nominal & Oversize CherryMAX Rivets (G744 only)

P/N 12-03096

CHERRYMAX OFFSET PULLING HEAD H827-8

CherryMAX Offset Pulling Head installs 1/4" Nominal & Oversize CherryMAX Rivets (G744 only)

P/N 12-03093

CHERRYLOCK® RIGHT ANGLE PULLING HEADS H886

The H886 series right angle s fit directly on the G701A, G704B, G746A and G747 power riveters to install CherryLOCK® 'A' brand rivets in 3/32", 1/8", 5/32" and 3/16" diameters in all materials, head styles and up to -04 grip length.

H886-3	P/N 12-03113
H886-4	P/N 12-03114
H886-5	P/N 12-03115
H886-6	P/N 12-03116

OFFSET LOCKBOLT PULLING HEADS H562-6B/8B

The H562 series pulling heads. Requires adapter (744-100) when used on the Cherry G84 tool.

-6 Diameter 3/16"	P/N 12-03059
-8 Diameter 1/4"	P/N 12-03060

CHERRY PULLING HEADS

CHERRY PULLING HEAD H1900-456

The H1900-456 is designed to reliably install all sizes of the single action NAS1919/1921 product assembled with or without a drive washer. To install the product without a drive washer use the appropriate nose piece. Total weight without riveter: .27 lbs (0.1222 kg). Use with G83 or G84 Cherry Riveter or any riveter equipped with a 352 Style Mounting System.....P/N 12-03019

COMPACT UNIVERSAL STRAIGHT PULLING HEAD H800

Compact Universal Straight Pulling Head for G800 riveter. Weight - 0.15 lbs.....P/N 12-03092

SHORT PINTAIL BASIC PULLING HEAD H513



Cherry Short Pintail Basic Pulling Head H513 - See Tool Specifications below to determine which pulling head is needed.

Cherry P/N	LockBolt Dia.	Installed Length	Part No.	Price
H513-04-20	1/8"	2" (51 mm)	12-03020	.
H513-04-35	1/8"	3-1/2" (89 mm)	12-03021	.
H513-05-35	5/32"	3-1/2" (89 mm)	12-03022	.
H513-06-20	3/16"	2" (51 mm)	12-03023	.
H513-06-60	3/16"	6" (152 mm)	12-03024	.
H513-08-35	1/4"	3-1/2" (89 mm)	12-03025	.

SWIVEL NOSE PULLING HEAD H513S



Cherry Swivel Nose Pulling Head H513S - See Tool Specifications below to determine which pulling head is needed.

Cherry P/N	LockBolt Dia.	Installed Length	Part No.	Price
H513S-05-20	2" (51 mm)	5/32"	12-03026	.
H513S-05-35	3-1/2" (89 mm)	5/32"	12-03027	.
H513S-06-20	2" (51 mm)	3/16"	12-03028	.
H513S-06-24	2-3/8" (60 mm)	3/16"	12-03029	.
H513S-06-35	3-1/2" (89 mm)	3/16"	12-03030	.
H513S-06-48	4-13/16" (122 mm)	3/16"	12-03031	.
H513S-08-24	2-3/8" (60 mm)	1/4"	12-03032	.
H513S-08-35	3-1/2" (89 mm)	1/4"	12-03033	.
H513S-08-48	4-13/16" (122 mm)	1/4"	12-03034	.
H513S-10-27	2-11/16" (68 mm)	5/16"	12-03035	.
H513S-10-42	4-3/16" (106 mm)	5/16"	12-03036	.
H513S-12-27	2-11/16" (68 mm)	3/8"	12-03037	.
H513S-12-42	4-3/16" (106 mm)	3/8"	12-03038	.

SELF RELEASING SWIVEL NOSE PULLING HEAD H513SR



Cherry Self Releasing Swivel Nose Pulling Head H513SR - See Tool Specifications below to determine which pulling head is needed.

Cherry P/N	LockBolt Dia.	Installed Length	Part No.	Price
H513SR-05-20	2" (51 mm)	5/32"	12-03039	.
H513SR-05-35	3-1/2" (89 mm)	5/32"	12-03040	.
H513SR-06-20	2" (51 mm)	3/16"	12-03044	.
H513SR-06-24	2-3/8" (60 mm)	3/16"	12-03045	.
H513SR-06-35	3-1/2" (89 mm)	3/16"	12-03046	.
H513SR-06-48	4-13/16" (122 mm)	3/16"	12-03047	.
H513SR-08-24	2-3/8" (60 mm)	1/4"	12-03048	.
H513SR-08-48	4-13/16" (122 mm)	1/4"	12-03049	.
H513SR-10-27	2-11/16" (68 mm)	5/16"	12-03050	.
H513SR-10-42	4-3/16" (106 mm)	5/16"	12-03051	.
H513SR-12-27	2-11/16" (68 mm)	3/8"	12-03052	.
H513SR-12-42	4-3/16" (106 mm)	3/8"	12-03053	.

SELF RELEASING SWIVEL NOSE/ CHISEL SHAPE PULLING HEAD H513SRC



Cherry Self Releasing Swivel Nose/Chisel Shape Pulling Head H513SRC - See Tool Specifications below to determine which pulling head is needed.

Cherry P/N	LockBolt Dia.	Installed Length	Part No.	Price
H513SRC-05-20	2" (51 mm)	5/32"	12-03054	.
H513SRC-05-35	3-1/2" (89 mm)	5/32"	12-03055	.
H513SRC-06-20	2" (51 mm)	3/16"	12-03056	.
H513SRC-06-35	3-1/2" (89 mm)	3/16"	12-03057	.
H513SRC-08-48	4-13/16" (122 mm)	1/4"	12-03058	.

CHERRYLOCK "A" CODE PULLING HEAD H84-8CLA

Cherrylock "A" Code Pulling Head for use with G84 riveters. Tool weight (without riveter): .3 lbs (0.14 kg).P/N 12-03104



OFFSET LOCKBOLT/ SHORT PINTAIL PULLING HEAD H563SP

See Tool Specifications below to determine which pulling head is needed.

Cherry P/N	Type	LockBolt Dia.	Part No.	Price
H563SP-4B	Basic Pulling/Short Pintail	1/8"	12-03064	.
H563SP-5B	Basic Pulling/Short Pintail	5/32"	12-03065	.
H563SP-6B	Basic Pulling/Short Pintail	3/16"	12-03066	.

CHERRYLOCK® STRAIGHT PULLING HEAD H681



Fits directly on all Cherry hydroshift riveters, 2-9/16" installed. Separate pulling head is required for each style & diameter rivet.

Description	Rivet Dia.	A/B Dims.	Part No.	Price
H681-3C Universal C-Sunk Head	3/32"	.163" / .332"	12-03070	.
H681-4C Universal C-Sunk Head	1/8"	.208" / .341"	12-03071	.
H681-4F Countersunk Head 156	1/8"	.430" / .358"	12-03072	.
H681-4S Countersunk Head NAS 1097	1/8"	.174" / .341"	12-03073	.
H681-5C Universal C-Sunk Head	5/32"	.269" / .352"	12-03074	.
H681-6C Universal C-Sunk Head	3/16"	.335" / .386"	12-03075	.
H681-6F Countersunk Head 156	3/16"	.625" / .367"	12-03076	.
H681-6S Countersunk Head NAS 1097	3/16"	.281" / .386"	12-03077	.
H681-8C Universal C-Sunk Head	1/4"	.458" / .398"	12-03078	.

CHERRYLOCK® STRAIGHT PULLING HEAD H681B



Fits directly on all Cherry hydroshift riveters, 2-9/16" installed. Separate pulling head is required for each style & diameter rivet.

Description	Rivet Dia.	A/B Dims.	Part No.	Price
H681B166-4 Uni-Sink Head	1/8"	.250" / .359"	12-03079	.
H681B166-5 Uni-Sink Head	5/32"	.313" / .377"	12-03080	.
H681B166-6 Uni-Sink Head	3/16"	.375" / .419"	12-03081	.

CHERRYMAX® STRAIGHT PULLING HEAD H701B-456



CherryMAX Straight Pulling Head H701B-456 - Installs 1/8", 5/32" & 3/16" Nominal & Oversize CherryMAX Rivets. P/N 12-03083

NUT PLATE PULLING HEAD WITH NOSEPIECES H702-3NPR



Cherry® Nut Plate Pulling Head. Includes nose-pieces: 728A9-3 (3/32") & 728A9-104 (1/8"). For G702A Riveter. Installs 3/32" & 1/8", 2.5 mm & 3 mm Nut Plate. P/N 12-03084

CHERRYMAX STRAIGHT PULLING HEAD H744A-8



CherryMAX Straight Pulling Head installs 1/4" Nominal & Oversize CherryMAX Rivets (G744 Only)P/N 12-03087



CHERRYMAX RIGHT ANGLE PULLING HEAD H753A-456

CherryMAX Right Angle Pulling Head H753A-456 installs 1/8", 5/32" & 3/16" Nominal & Oversize CherryMAX Rivets P/N 12-03089

CHERRYMAX OFFSET PULLING HEAD H781-456



CherryMAX Offset Pulling Head installs 1/8", 5/32" & 3/16" Nominal & Oversize CherryMAX RivetsP/N 12-03090



OFFSET LOCKBOLT PULLING HEAD H563

See Tool Specifications below to determine which pulling head is needed.

Cherry P/N	Type	LockBolt Dia.	Part No.	Price
H563-4B	Basic Pulling	1/8"	12-03061	.
H563-5B	Basic Pulling	5/32"	12-03062	.
H563-6B	Basic Pulling	3/16"	12-03063	.

STRAIGHT PULLING HEAD -8 CHERRYMAX® H84A-8

Straight pulling head H84A-8 for use with G84 Power Riveter and G84-LS Split Power Riveter (with adaptor 744-700). Pulling Head Weight: 0.2 lbs (0.09 kg).....P/N 12-03106

TO

RIVET GUNS

CHERRY G-28 HAND RIVETER GUN



The Cherry G-28 is a lightweight (13 oz.) ruggedly compact hand tool designed to efficiently set a broad range of Cherry commercial rivets. A unique torsion spring keeps the lever arm in place, ready to accept rivet after rivet. The G-28 comes with two popular size nosepieces, 728A9-4 (to set Cherry N Rivets - 1/8" dia. & Cherry Q Rivets - 1/8" dia.) and 728A9-6 (to set Cherry N Rivets - 5/32" & 3/16" dia. & Cherry Q Rivets - 5/32" & 3/16" dia.), one of which is stored securely out of the way in the riveter handle. P/N 12-03000

CHERRY G-29 HAND RIVETER



The Cherry® G-29 Hand Riveter is an efficient, compact, lightweight tool for installing Cherry® NUT-PLATE rivets. It comes equipped with a 728A9-3 nosepiece to install 3/32" rivets and has a 728A9-104 nosepiece stored in the handle for installing 1/8" rivets. The G-29 Riveter is 9-1/4" long, weighs just 13 ounces and is intended for use when access or power limitations prevent the use of Cherry® power tools. P/N 12-00701

CHERRY G-27 HAND RIVETER KIT



The Cherry G-27 Hand Riveter is designed specifically for the most efficient installation of 1/8" CherryMAX Rivets. The G-27 Riveter is intended for use where access or power limitation prevents the use of Cherry pneumatic power tools. Overall length of the G-27 is 9-1/4", the net weight is just 13 ounces and the pulling head is an integral part of the tool. P/N 12-03105

120° FLUSH DIMPLING TOOL



This unique tool for 1/8" 120° countersunk "Pop" rivets attaches to the Cherry G-28 standard hand "Pop" rivet gun. Simple design makes dimpling foolproof, quick and easy, with no cracking of metal. For use on aluminum to .040" thickness. P/N 17014

ADJUSTABLE RIVET SPACER



For uniform spacing of rivets, bolts, nails, etc. Unique fan design expands to 36". Equally spaces up to 20 holes between 2 given points. Made of 301 stainless steel. 20 Hole spacer P/N 12-11700 10 Hole spacer P/N 12-00184

ULTRALIGHT NUTPLATE DRILL MOTOR



Ergonomic, lightweight design. Only one hand required to locate, drill & countersink both holes. Easily convert rivet spacings with interchangeable foot attachments. Accommodates all nutplate spindle spacings from 0.219" to 1.125". Fully adjustable feed rate. P/N 12-01376

THREAD SELF-COILING AIR/VACUUM HOSE



This 25 ft. air vacuum hose snaps back to a compact 20" coil for easy storage. Includes non-corrosive brass male fittings. Excellent for air tools using a compressor. 100 PSI working pressure. Oil resistant polyurethane construction. High visibility color. 1/4" NPT air inlet. P/N 12-00218

RED BOX 737 RIVET GUN KIT



Includes: 1pc Rivet Gun (choose size 2X, 3X or 4X), 1pc Type A -Bucking Bar, 1pc Type B -Bucking Bar, 1pc Brass Regulator, 1pc Air Tool Fitting, 4pcs 3.5" Straight Rivet Set (3/32", 1/8" 5/32", 3/16"), 1pc Standard Flush Set (Surface: 1", Length: 2.5"), 1pc Beehive Spring, 1pc Retainer Spring, 1pc Marvel Air Tool Oil

Gun	Length	BPM	Cap.	Bore	Shank	Stroke	Weight	Part No.	Price
2X	6-11/16"	2580	1/8"	1/2"	.401"	2-1/4"	3. lbs	12-02682	.
3X	7-5/16"	2160	3/16"	1/2"	.401"	2-7/8"	3.2 lbs.	12-02686	.
4X	8-1/2"	1740	1/4"	1/2"	.401"	3-1/16"	3.4 lbs.	12-02687	.



ATS AIRCRAFT RIVET GUN #2602

So controllable you can easily buck rivets as small as 3/32" to as large as 3/16". P/N 12-18340

RIVET SET MAX FOR 2602 RIVET GUN

3/32", 1/8", 5/32" and 3/16" rivets.

3-1/2" (5 pcs. straight, includes flat) P/N 12-18341
3-1/2" (4 pcs. offset) P/N 12-18342
5-1/2" (4 pcs. straight) P/N 12-18344

PROFESSIONAL HAND PLIER RIVET TOOL



Professional Hand Plier Rivet Tool is 50% easier to use than other hand tools. A patented compound link designed does the work for you. A shorter grip opening ergonomically designed for one hand operation. Grips cover the length of the lever and body, and soft handles are contoured to fit the hand. The wrench and nosepieces (3/32", 1/8", 5/32", & 3/16") are stored in the handle of the tool. Excellent for use on Cherry and other standard pop rivets.

Features: • Robust aluminum casting and vanadium steel handle design • Setting capacity: aluminum rivets up to 3/16" (4.8 / 5.0mm) body diameter • Contoured handle grips for comfort • Rivet retaining handle design for one-handed riveting • Supplied with nosepieces for 3/32", 1/8", 5/32" & 3/16" (2.4mm, 3.2mm, 4.0mm & 4.8mm) rivets • Supplied nosepiece wrench • Length: 9.65" (245mm) • Weight: 1.3 lbs. (0.6 kg) P/N 12-00178

MILWAUKEE M12 RIVET GUN



A Cordless solution that delivers fast, easy riveting while maintaining performance, durability, and size. The 2550 can pull up to 250 3/16" stainless steel rivets or 450 1/8" steel rivets on one charge with a 1.5ah battery, and reduces muscle effort from a hand tool by 60%. This is the most compact cordless rivet tool on the market, measuring only 6.5" in length allowing users more access in tight spaces. P/N 12-05736

HEAVY DUTY RIVETER



Includes four nosepieces to set rivet diameters from 3/32" up to 3/16". Convenient lock chain keeps handles closed when tool is not in use. Made in U.S. P/N 12-18352

3M™ RIVETERS TAPE

3M™ Riveters Tape 685 Transparent Film with Green Adhesive, 1.7 mils (.043 mm) Polyester film with a rubber-strip coated along edges of tape only and tack-free center Window P/N 12-18355



PNEUMATIC-HYDRAULIC BLIND RIVETER



No larger than a compact drill motor, will install virtually any straight-pull blind rivet with installation loads of 3500 lbs. or less. All blind rivets from 3/32" dia. up to and including 1/4" dia. Can install CherryMax rivets. It utilizes a patented two-valve hydraulic pump actuated by 90 to 130 PSIG air pressure. Collect/jaw assembly remains stationary while the outer sleeve-nosepiece assembly is hydraulically moved, creating sufficient load to install the rivet. Furnished with three nosepieces for 1/4", 1/8", 3/16" & 3/32" rivets. Wt. 29 oz. P/N 09-01070

RED BOX 777 RIVET GUN KIT



Includes: • 1pc Rivet Gun (Choose Size 2X, 3X or 4X) • 1pc Type A -Bucking Bar • 1pc Type B -Bucking Bar • 1pc Type C -Bucking Bar • 1pc Type D -Bucking Bar • 1pc Brass Regulator • 1pc Air Tool Fitting • 4pcs 3.5" Straight Rivet Set(3/32",1/8",5/32",3/16") • 4pcs 3.5" Offset Rivet Set(3/32",1/8",5/32",3/16") • 1pc Standard Flush Set (Surface: 1", Length: 2 1/2") • 1pc Flush Set w/ Rubber Spring • 1pc Marvel Air Tool Oil
2X Rivet Gun Kit P/N 12-03726
3X Rivet Gun Kit P/N 12-03727
4X Rivet Gun Kit P/N 12-03728

RIVETERS

BLUE PNEUMATIC RIVETING TOOL BP-3V

2100lbs. of force the tool has the best weight to power ratio in the industry, boasting 2100lbs of pulling force. It can set 1/8, 5/32 and 3/16 rivets in all Alloys. Super light weight and small, allowing the rivet gun to fit in the tightest of spaces. Convenient, thumb-operated on/off vacuum control switch to control compressor air consumption. Comes complete with nose tips for 1/8, 5/32 and 3/16. Also included are wrenches for service and oil applicator. Recommended operating air pressure is 80-95 PSI. Weight 3.2 lbs.P/N 12-03384

BLUE PNEUMATIC RIVETING TOOL BP-4V

3500lbs of pulling force. Can set 1/8, 5/32, 3/16 and 1/4 rivets in all Alloys. Super light weight, allowing the rivet gun to be operated continually with great comfort. Convenient, thumb-operated on/off vacuum control switch to control compressor air consumption. Complete with nose tips for 1/8, 5/32, 3/16 and 1/4. Also included are wrenches for service and oil applicator. Recommended operating air pressure is 80-95 PSI. Weight 3.6 lbs.P/N 12-03385

BLUE PNEUMATIC COMPACT HEAVY DUTY RIVETER BP-54

The power of the large "heavy duty" riveters in the body of a small one. Sets 3/32, 1/8, 5/32 and 3/16 rivets in all materials. Ideal for multi-grip rivets and pulls 3/16 Monobolt/Magna-lok structural rivets. Nose pieces and service wrenches are included. Recommended operating air pressure is 85-100 PSI. Weight 4 lbs.P/N 12-03386
Without VacuumP/N 12-03429
With Vacuum

BLUE PNEUMATIC HEAVY DUTY AIR /HYDRAULIC RIVETER BP-50

3800lbs. of force. Sets rivets from 1/8 through 1/4 in all materials. Its 7/8 stroke allows this rivet tool to pull most structural rivets in one stroke. Great for high production applications. Comes with nose pieces including 1/8, 5/32, 3/16 and 1/4. Also included are wrenches for service and oil applicator. Recommended operating air pressure is 85-100 PSI. Weight 5 lbs.P/N 12-03387

BLUE PNEUMATIC POWER MICRO BLIND RIVET GUN BP-48V

Installs 3/32, 1/8 and 5/32 blind rivets in all materials. This rivet tool weighs in at 2.4 lbs and has 1760 lbs. of pulling force. The rivet gun comes with a vacuum powered mandrel collection system. Also included are wrenches for service and oil applicator. Recommended operation pressure 85-100 PSI. Weight 2.4 lbs.P/N 12-03388

BLUE PNEUMATIC AIR HYDRAULIC RIVETER WITH VACUUM BP-50V

3800lbs. of force. Sets rivets from 1/8 through 1/4 in all materials. Its 7/8 stroke allows this rivet tool to pull most structural rivets in one stroke. Great for high production applications. Rivet tool comes with nose pieces including 1/8, 5/32, 3/16 and 1/4. Also included are wrenches for service and oil applicator. Recommended operating air pressure is 85-100 PSI. Weight 5 lbs.P/N 12-03430

BLUE PNEUMATIC BIG SPIN RIVET NUT TOOL BP-200BC

Now with a swiveling air inlet and ergonomic composite handle. Operates at 200 rpm for installations of the large rivet nuts. Places 1/2-13 and M12. Recommended operating air pressure is 85-110 PSI. Weight 2.8 lbs. Part includes nose assembly, make selection at time of order. Nose assembly sizes: 632, 832, 1024, 1/4-20, 5/16-18, 3/8-16.P/N 12-034312.95

BLUE PNEUMATIC HEAVY DUTY LEVER RIVET NUT TOOLS

HEAVY DUTY LEVER RIVET NUT TOOL BP-734: • Heavy Duty Lever Rivet Nut Tool • Comfortable easy grip handle • Long handles for easy rivet nut and nutsert installations. • Includes M5, M6, M8 and M10 Nose Assemblies.P/N 12-03501

HEAVY DUTY LEVER RIVET NUT TOOL BP-734S: • Heavy Duty Lever Rivet Nut Tool • Comfortable easy grip handle • Long handles for easy rivet nut and nutsert installations • Includes 10-24, 1/4-20, 5/16-18 and 3/8-16 Nose Assemblies.P/N 12-03502

HEAVY DUTY LEVER RIVETER BP-764: • Up to 1/4 steel • Heavy Duty Lever Rivet Tool • Comfortable easy grip handle • Rivet tool comes with nose pieces including 1/8, 5/32, 3/16 and 1/4.P/N 12-03503

BLUE PNEUMATIC COMPACT HEAVY DUTY RIVETER BP-54

Sets 3/32, 1/8, 5/32 and 3/16 rivets in all materials. Ideal for multi-grip rivets and pulls 3/16 Monobolt/Magna-lok structural rivets. Nose pieces and service wrenches are included. Recommended operating air pressure is 85-100 PSI. Weight 4 lbs.P/N 12-03432

BLUE PNEUMATIC ACCU-SPIN RIVET NUT TOOL BP-600QC

Swiveling air inlet and ergonomic composite handle. Operates at 800 rpm for quick installations of smaller rivet nuts. Places 6-32, 10-24, 1/4-20 and M4, M5, and M6 rivet nuts. Recommended operating air pressure is 85-110 PSI. Weight 2.8 lbs. Part includes nose assembly, make selection at time of order. Nose assembly sizes: 632, 832, 1024, 1/4-20, 5/16-18, 3/8-16.P/N 12-03433

BLUE PNEUMATIC QUICK SPIN RIVET NUT TOOL BP-2000QC

Swiveling air inlet and ergonomic composite handle. Operates at 1600 rpm for quick installations of smaller rivet nuts. Places 6-32, 8-32, 10-24 and M3, M4, as well as Jacknuts. Recommended operating air pressure is 85-110 PSI. Weight 2.8 lbs. Part includes nose assembly, make selection at time of order. Nose assembly sizes: 632, 832, 1024, 1/4-20, 5/16-18, 3/8-16.P/N 12-03434

BLUE PNEUMATIC SPIN PULL SPIN ULTRA RIVET NUT TOOL BP-60

SPIN-PULL-SPIN setting sequence. In one touch the fastener quickly spins on, pulls the fastener, and with the release button, spins out of the fastener. Setting cycle is about 2 seconds. Fully adjustable stroke for accurate insert placements. Mandrels are included with tool. Comes complete with sizes 8-32 through 1/2-13 or M4 through M12. "More Power" means this tool uses its huge 6800 lbs. of pulling force to set up to 1/2 (M12) steel rivet nuts with ease. Recommended operating air pressure is 80-100 PSI. Weight 6 lbs. StandardP/N 12-03436
MetricP/N 12-03505

BLUE PNEUMATIC CORDLESS RIVETER BP-20CR

The Blue Pneumatic BP-20CR 1/4" Blind Rivet Tool is an ultra-fast cordless rivet tool. It eliminates the need for air hoses and compressors and is built to last. The brushless motor makes this tool very durable, lasting many times longer than other rivet tools. With an industry leading 27mm (1 1/16 in) stroke, it pulls rivets in just one stroke. This tool is ideal for production environments as it has a sturdy outer composite body and requires just about no maintenance. BP-20CR's Brushless Motor delivers 4,496 lbs. (20kN) of pulling force for high-strength Structural blind rivets in all materials. This rivet tool pulls rivets ranging from 1/8 up to 1/4" in all materialsP/N 12-05561

BLUE PNEUMATIC HAND TOOL BP-738

Rivet Nut Hand Tool BP-738.
StandardP/N 12-03437
MetricP/N 12-05433

BLUE PNEUMATIC RIVET NUT TOOL W/MANDRELS BP-738M

Hand tool with mandrels. Includes Mandrel sizes 6-32, 8-32, 10-24 and 1/4-20.P/N 12-03440

BLUE PNEUMATIC R AND D HAND TOOL KIT BP-738K

BP-738 Hand Tool. Mandrels including 6-32, 8-32, 10-24, and 1/4-20. Also includes 40 total pcs of assorted rivet nuts that match included mandrels. Comes in molded plastic case (Private labeling available)P/N 12-03441

BLUE PNEUMATIC NOSE ASSEMBLY FOR SPIN-SPIN RIVET NUT TOOLS

Quick change nose assembly. Available in 6-32 through 3/8-16. Spin-Spin tools use replaceable socket head cap screw. 3/8 air hose recommended for optimal performance.

Description	Part No.	Price
Blue Pneumatic BPQ-632 Nose Assembly	12-03442	.
Blue Pneumatic BPQ-832 Nose Assembly	12-03443	.
Blue Pneumatic BPQ-1024 Nose Assembly	12-03444	.
Blue Pneumatic BPQ-1/4-20 Nose Assembly	12-03445	.
Blue Pneumatic BPQ-5/16-18 Nose Assembly	12-03446	.
Blue Pneumatic BPQ-3/8-16 Nose Assembly	12-03447	.

TO

RIVET NUT TOOLS – TAPE MEASURES

L-6000 RIVET NUT SPEED DRIVER

This tool is designed for light production and features high speed push-pull, smooth, spiral action. Sized #4 through #10 adequate for brass, aluminum, and steel. Sized #4 through #8 adequate for stainless steel. Provides easy on-and-off threading of rivet nut with push-pull knob. Adjustable anvil for different length rivet nuts. Made in U.S.A. The C-6000 Speed Header is available for Rivet Nuts with the following thread sizes:

6-32 P/N 12-12600 8-32 P/N 12-12700
10-32 P/N 12-12800 1/4-28 P/N 12-12900

CONVERSION KIT - For changing speed header to a different Rivet Nut thread size. Order by P/N .

6-32 Kit P/N 12-13000 8-32 Kit P/N 12-13100
10-32 Kit .. P/N 12-13200 1/4-28 Kit . P/N 12-13300

C-845 ECONOMY RIVET NUT TOOL

Model L-845 wrench type Rivet Nut tool is for field repair & experimental use. Adequate for aluminum, brass, steel, and stainless. Made in U.S.A. Order by part number.

Available in following thread sizes:

6-32 P/N 12-13400 8-32 P/N 12-13500
10-24 P/N 12-13600 10-32 P/N 12-13700
1/4-20 P/N 12-13800 1/4-28 P/N 12-13900

L722 WRENCH TYPE RIVET NUT TOOL



L722 Wrench Type Rivet Nut installation tool for the larger size fasteners 5/16" up to 1/2", tool comes with long arm allen wrench with plastic handle for easy installation.

Description	Part No.	Price
Wrench Type Header 5/16-18	12-00920	.
Wrench Type Header 3/8-16	12-00922	.
Wrench Type Header 1/2-13	12-00927	.
Wrench Type Header M10	12-00930	.
Wrench Type Header 5/16-24	12-00921	.
Wrench Type Header 3/8-24	12-00926	.
Wrench Type Header 1/2-20	12-00928	.

L-1000 ECONOMY HAND RIVET NUT TOOL

The L-1000 economy hand Rivet Nut tool is recommended for slotted rivet nut fasteners. Adequate for aluminum, brass, steel and stainless steel fasteners. Made in U.S.A.

Order by part number. L-1000M is same tool, except in metric sizes.

Model	Thread Size	Part No.	Price Ea.
L-1000	(60-32)	12-13645	.
L-1000	(8-32)	12-13650	.
L-1000	(10-32)	12-13655	.
L-1000M	(M6)	12-13675	.

BLIND RIVET REMOVAL TOOL

This rivet removal tool allows you to remove those stubborn Pop, Avdel, Cherry-Q, and other blind rivets. The serrated nose piece fits over any button head, round head, or universal head rivet and locks in place to keep it from spinning as it's being drilled out. It will also remove solid rivets. Includes adapters to remove 3/32", 1/8", 5/32", and 3/16" rivets.

Note: Not for use with steel rivets

Red P/N 12-03368

RIV-NUT PULLERS

The Riv-Nut Puller was designed for installation of steel and aluminum rivet-nuts. High speed, push-pull action. Available in sizes 6/32, 8/32, and 10/32.

Rivet Nut Puller 6-32 P/N 12-02886
Rivet Nut Puller 8-32 P/N 12-02887
Rivet Nut Puller 10-32 P/N 12-02888
Rivet Nut Puller Conversion Kit 8-32 P-N 12-02880
Rivet Nut Puller Conversion Kit 10-32 P/N 12-02881
Rivet Nut Puller 6-32 w- 2 Conversion KitS. P/N 12-02885
Rivet Nut Stem Replacement 6-32 P/N 12-02889
Rivet Nut Stem Replacement 8-32 P/N 12-02890
Rivet Nut Stem Replacement 10-32 P/N 12-02891
Rivet Nut Puller Conversion Kit 8-32 P/N 12-02880
Rivet Nut Puller Conversion Kit 10-32 P/N 12-02881
Rivet Nut Puller 6-32 w- 2 Conversion Kit ... P/N 12-02885

RIVET CONVERSION KITS

Converts your conventional hand pop riveter into an economical RivNut installer tool.

Size	Part No.	Price
6-32	P/N 12-13680	.
8-32	P/N 12-13681	.
10-32	P/N 12-13682	.

HEAVY DUTY RIVET CUTTER



This high quality, durable rivet cutter features all steel construction and cuts 1/16" to 1/4" diameter rivets. It is adjustable for 1/4" to 3/4" long rivets.

P/N 12-16840

RIVET CUTTER



This handy rivet cutter, w/ 2 hardened blades, cuts rivets of any standard dia. from 3/32" to 3/16" without burring. The length of the cut rivet can be varied from 3/16" to 5/8" by means of 8 adjustable leaves attached to the cutting head. Plastic coated grips. Wt. 2 lbs.

P/N 12-00200

LUFKIN METRIC/INCH TAPE MEASURE



LUFKIN NO. W9210ME Has 1/2" blade, 3 meters long (equal to about 10 ft.). Markings are on one side only, with millimeters on upper edge and inches to 16ths on lower edge. White face P/N 12-19700

STANLEY DECIMAL INCH TAPE MEASURE



This 12-ft. steel tape measure with 1/2" blade is graduated in tenths & hundredths of inches and also in fractions of inches (32nds). Very handy for all aircraft construction. A must for building composite aircraft. P/N 33-272

SMART TOOL DIGITAL INCLINOMETER



Smart Tool is a unique digital inclinometer with up to 0.1° of repeatable accuracy. Measures and displays any angle through 360°, and readings can be relative to any angle. Smart level even calculates complicated slope measurements in either percent or inches per foot. It is sunlight viewable, features 3 sensitivity settings, and has 120-hour battery life with auto shut-off. Powered by any 9V battery.

Smart Tool in 24" rail P/N 12-21365
Smart Tool in 48" rail P/N 12-21370

INSTANT MAGNETIC ANGLE FINDER



Measuring angles is a snap with Johnson's magnetic angle locator. It features a high-impact molded body and an extra-strong ceramic magnet that sticks to ferrous metal surfaces, while the v-groove edges fit perfectly onto pipe and conduit.

Easy to read increments show 0-90° in all four quadrants on the durable acrylic lens, and the sides are marked with length graduations for convenience - one leg shows inch graduations while the other leg shows metric graduations. P/N 12-14800

DIGITAL PROTRACTOR/LEVEL ND-81



Full 360-degree measuring range with maximum resolution and accuracy of 0.1 degree. Simple 30 second calibration procedure using only the top flat edge of a table or desk. Alternate zero button to set zero starting point at any angle (commonly used for aileron, flap and elevator rigging). Display hold button to freeze reading when measuring in tight spaces. Readout stays upright even when protractor is upside down.

P/N 12-02651

PRO 360 DIGITAL PROTRACTOR



The Pro 360 Digital Protractor is a revolutionary measuring tool that provides an immediate, digital reading of all angles in a 360° circle. The machined aluminum frame is a rigid, light weight, ultra-precise platform that allows the state-of-the-art sensor and its microprocessor circuit to provide unsurpassed accuracy throughout the Protractor's 360° range. Typical used by aircraft builders, maintenance personnel and airport operators.

P/N 12-20125

PRO 3600 DIGITAL PROTRACTOR



The PRO-3600 is accurate to 0.01° and has an RS-232 compatible serial port for a computer interface and SPC records keeping. P/N 12-00759

ATS-360 DIGITAL PROTRACTOR



It provides absolute measurement as well as relative measurement. 2.75" wide by 1.50" high LCD screen. Can convert between angles and slopes; Accurate to within .05 degrees P/N 12-04967

PLASTIC PRY TOOLS – SCRAPING TOOLS

BOJO PLASTIC PRY TOOLS

Soft, yet strong, all Bojo tools are made tough enough to pry, but not hard enough to damage. These 4 tools are provided as a set.



PLASTIC GENERAL WEDGE TOOL - General narrow point for reaching in narrow spaces.

PLASTIC STICKER/GASKET TOOL - Wedge tip, for use where a wide area is desired with a "soft" touch.



PLASTIC PRY BAR TOOL - The forked tip. The original for removing door panels and plastic grommets.

PLASTIC WEDGE PULLER TOOL - The forked tip. The original for removing door panels and plastic grommets. Set of 4 listed above.



P/N 12-00748.....

MASTER INSTALLER KIT - Soft, yet strong, all Bojo tools are made tough enough to scrape, but not hard enough to damage. Set of 7. P/N 12-00976.....

AIRCRAFT ASSEMBLY SCRAPER KIT - Soft, yet strong, all Bojo tools are made tough enough to scrape, but not hard enough to damage. Set of 4..... P/N 12-00977.....



DELUXE SCRAPER KIT - This is an expansion of our original 4 Piece Scraper Kit (which you currently buy in the medium strength material NGL). The new tips were design from request in the aviation fuel bladder cleaning industry for the US Air Force and US Navy overhaul programs. This new, stronger material is highly resistance to all forms of chemicals and sealants.P/N 12-01858.....

Description	Part No.	Price
Pry Tool Large LFT-2-N	12-01859	.
Sheet Panel ADJ Tool Kit	12-01860	.
Wire Guide Tool ATH-30-GNL	12-01857	.

MULTI WEDGE NON-MARRING TOOL SETS



Multi Wedge non-marring tool sets allow home-builders and avionics installers to remove panels, dash trim bezels, and other interior moldings, including door panels, without causing damage. Excellent for use in aviation, auto restoration, body work, electronics installation, upholstery etc. The Orange Set (3400) P/N 12-01671 is made of a softer polyethylene plastic blend for prying dash bezels, trims, and moldings without damaging the vehicles interior. The Black Set (3500) P/N 12-01672 is made of a more expensive high impact polycarbonate plastic for prying harder materials such as thin walled aluminum engine covers and sheet metal panels.

01671 is made of a softer polyethylene plastic blend for prying dash bezels, trims, and moldings without damaging the vehicles interior. The Black Set (3500) P/N 12-01672 is made of a more expensive high impact polycarbonate plastic for prying harder materials such as thin walled aluminum engine covers and sheet metal panels.

Product Benefits: • Flexible • Slick surface for ease of prying • Built-in handle • Non-marring surface • Slim powerful angle Multi Wedge Set Black (Hard) 3500.....P/N 12-01672.....

Two Multi Wedge Sets - Orange (Soft) / Black (Hard) 3400/3500 P/N 12-01673.....



SEALANT CUTTERS

Sealant cutter quickly and safely removes thick applications of seam sealant for aircraft maintenance and repair. Eliminates the need for harsh chemicals. Saves time and effort. 1/4" x 28 Threaded Shank.

.40" Diameter.....P/N 12-02879.....
.83" Diameter.....P/N 12-02878.....

CSR-10 COMPOSITE SEALANT REMOVER



CSR is made from durable Torlon® material that can remove sealant in many applications at a lower product cost with greater efficiency and productivity. For aerospace applications, CSR is safe to use on common protective coatings and structural materials.

CSR series can be used with 1/4"-28 UNF, 1/4" collet, and drill chuck interfaces. Screw in or attach/lock into rotary tool.

CSR cuts by rotating in the clockwise direction.

Operate the CSR at 200-400 RPM for better controllability while avoiding heat buildup. Heat will accelerate wear on the CSR and may generate undesirable odor from the sealant. For general applications, use the CSR-10 to engage an edge of the sealant and allow the rotating action to cut through at the bond line. **Specifications:** • Diameter: 1" • 1/4"-28 UNF.....P/N 13-23407.....

BOJO STRONG 90MM WIDE SCRAPERS



3" (90mm) Wide Edge Scraper Tool Extreme or CELCON Material ITH handle.

Extreme.....P/N 12-04766.....
Celcon.....P/N 12-04768.....



BOJO EXTREME EDGE SCRAPERS

Composite Angle or Concentrated Extreme Edge Scraper Tools. Angle: for Sharp edges & corners. Concentrated: for scraping power into small regions.

Angle.....P/N 12-04769.....
Concentrated.....P/N 12-04770.....

2 PIECE LONG AND NARROW PRY TOOL KIT



Includes: • 1 - For wedging & splitting deep into narrow locations. (Flat tip) • 1 - For prying in narrow and deep locations. (Pry tip).....P/N 12-04771.....

BOJO COMPOSITE ANGLED PUSH/PULL EXTREME SCRAPERS



Includes: • 1 - Composite Angled Push/Pull Extreme Scraper • 1 - Composite Flat Push/Pull Extreme Edge Scraper.....P/N 12-04772.....



BOJO SCRAPER EDGE

Narrow Edge Scraper Edge Scraper (1/4" Wide) P/N 12-04773.....



BOJO SCRAPER 3MM WIDE

Narrow Edge Scraper Edge Scraper (1/8" Wide). P/N 12-04774.....



BOJO 3 PIECE SMOOTHING KIT WITH POUCH

Sealant Smoothing Tool Kit "Extreme". Includes all three Bojo smoothing tools and vinyl pouch. Bojo Tools now offer a comprehensive range of sealant smoothing tools to complement the scraper systems supplied for aerospace, automotive and general industrial applications. Industry standard profiles and unique Bojo designed tips ensure economical, consistent and aesthetic application of all standard sealant types.....P/N 12-04775.....



SCRAPERITE BLADES

Scrapelite® double-edged plastic blades and one holder. This original patented double-edged design is best for corner access and straight line scraping. It is the workhorse of the line, the blade series that helped build the brand and remains a key tool in many applications. These blades naturally lift dirt up and away without picking up germs and can be easily wiped with a disposable cloth after each stroke, unlike scrubbing pads and sponges that collect dirt with every pass. The Orange General Purpose (GPO) blade is a forgiving material soft enough to be used on most soft surfaces like other plastics, thanks to its natural lubricity and pliability. It also has good resistance to household and industrial chemicals making a great all-around blade for general use around the home or workplace. This resistance to chemicals makes it ideal for removing decals with chemicals like acetone used to quickly break down the acrylic adhesives. This material is approved by Alcoa and Boeing for use on aircraft alloys. Orange (General Use) - 5 Pack.....P/N 12-05564.....

SEALANT REMOVAL TOOLS



These tools are full machined and/or laser cut, which helps them retain a sharp edge. The tools are used by many defense contractors and Naval air stations for sealant application, sealant removal, paint removal, acrylic canopy contact, and general use. They are made from cell cast acrylic or black nylon as noted. These tools can be resharpened on an abrasive belt or disc. Note: 15% Discount on 12 or more (Per P/N)

Model	Material	Part No.	Price
Model 1	Acrylic	12-02360	.
Model 2	Nylon	12-02361	.
Model 3	Acrylic	12-02362	.
Model 4	Acrylic	12-02363	.

TO



MULTI-PURPOSE SCRAPER

This Multi-purpose scraper has a 2 1/4" wide blade ideal for more coverage. This scraper is ideal for lighter duty jobs. It has a blade cover for safety and a hole in the handle to hang for convenience. This scraper is disposable and does not have replacement blades available. P/N 12-02371



OLFA MULTI-GRIP SCRAPER

The PP resin provides enhanced durability and high acetone-resistance. Handle is kept as thin as possible; its thickest part is only 7mm-thick. 4-3/4" Stainless steel blade is perfect for use with dishwashing liquid or dish

bleach. Blade exchange needs no special tools.

Scraper.....P/N 12-04886
Replacement Blades (30 Pack).....P/N 12-04887



RECOIL KITS

The Recoil System is the simple way to repair stripped or damaged threads. It provides stronger and more efficient threads which have great holding power. The system is quick and easy to use and is ideal for alloys and other light materials. The recoil insert, which is larger in diameter than the tapped hole, is compressed during installation then allowed to spring back, permanently anchoring into place. The Recoil System consists of Recoil stainless steel helically wound precision inserts, high quality HSS taps and installation tools

* UNF - Unified Fine Thread

**UNC = Unified Coarse Thread

*** Metric = Metric & Spark Plug (ISO)

Kit Part No.	Size	Inserts per kit	Price
33004**	UNC Range Kit	50	.
34004*	UNF Range Kit	50	.
33058**	UNC Range Kit	15	.
34608*	UNF Range Kit	15	.
34048*	UNF Range Kit	15	.
34058*	UNF Range Kit	15	.
34068*	UNF Range Kit	15	.
34078*	UNF Range Kit	10	.
34088*	UNF Range Kit	10	.
35068***	M6X1	15	.
35088***	M8X1.25	15	.

1/4 INCH FEMALE QUICK COUPLER



Merlin™ air tool plugs deliver longer life and higher performance. This I/M Series Female Plug is constructed of durable steel and fits 1/4 in. couplers. The Industrial plug is rated at a maximum of 300 PSI of air pressure to power your pneumatic tools

P/N 12-05183



MASTER CHUCK

These versatile Master Key Chucks are available in two sizes (small & large) which open sizes 1/4" to 3/4". These tools allow you to open over 1200 different key chucks. Save wear on chucks by always having the proper key size available. The squared center of the keys opens acetylene tanks. Made of treated steel with black oxide finish.

Small.....P/N 12-30165

Large.....P/N 12-30170

ALL-SHARP DIAMOND SHARPENER



All Sharp is an innovative diamond sharpener that provides 4 different grit sizes on the same tool. All Sharp sharpens and fine sharpens tools and bits and cleans burrs on hard to reach parts and equipment. It's tough stainless body will not rust and All Sharp fits in any tool tray or pouch. Model ST-7.....P/N 12-21430



6-IN-1 COMBINATION SCREWDRIVER

• Industrial rated bits for extra long life • Heat treated 1/4" & 5/16" nut drivers • Interchangeable bits fit both Phillips & Slotted screws • Bits: 3/16" Slotted; 9/32" Slotted; #1 Phillips, #2 Phillips.

P/N 12-14000

SMARTKNIFE WR 8-IN-1 MULTI-TOOL



The SMARTKNIFE WR features a 2.5" black oxidized Sheepfoot blade cleverly wrapped in an assortment of multi-tools. This 8-in-1 multi-tool knife is equipped with an adjustable wrench, calipers, magnetic 1/4" bit driver, wire strippers, rulers, flat driver, and a pry bar, making this the smartest knife you can put in your pocket.....P/N 13-26074

SMARTKNIFE+ 15 IN 1 MULTI-TOOL



The SmartKnife+ is a multi-tool wrapped around a super sharp 2.375" black oxidized pocket knife. The multi-tool handle features a small, medium and large flat driver, magnetic 1/4" bit driver and holder, file, wire strippers, rulers, wrenches, pry bar, pocket clip and bottle opener, making this the smartest knife you can put in your pocket. P/N 13-25660

PROP NUT TORQUE ADAPTOR WRENCHES



Drive	Socket	Length	Material	Part No.	Price
1/2"	9/16"	9"	Steel	12-06276	.
1/2"	5/8"	9"	Steel	12-06277	.
1/2"	11/16"	9"	Steel	12-06278	.
1/2"	3/4"	9"	Steel	12-06279	.
1/2"	13/16"	9"	Steel	12-06280	.
1/2"	7/8"	9"	Steel	12-06281	.

COAX CABLE CRIMPING TOOL



This 12 point, full ratchet crimping tool terminates precision BNC connectors in size RG 55,58,59,62,141,142,223,303 and 400. This crimper is built to MS22520 specifications and die set is included with the crimper. Specifications: Cable Groups: RG 55/58/59/62/141/142/223/303/400.....P/N 12-02378

3M™ CRIMPING TOOL TH-440



High carbon, heat-treated steel crimping tool that has a unique design that provides a high strength/weight ratio that crimps a broad range of 22-10 AWG terminals and connectors. P/N 12-01146

ATS ESD SAFE WIRE NIPPERS WITH FOD CLIP



These wire nippers have hardened jaws to cut up to 12 AWG copper wires without dulling. Plus it has a FOD catching clip that will hold the shipped ends of wires before they can fly off and become a safety hazard. It's also ESD save, which means that it will not hold a static charge, thus eliminating any chance of accidentally zapping your delicate electronics with static electricity. Convenient spring-loaded handles makes it easy to do one-handed work in confined areasP/N 12-05445


AT508K CANNON CONNECTOR PLIERS



The AT508K features serrated jaws for improved gripping and a slip joint for improved leverage. Ideal for all common cannon connector applications.....P/N 12-01627

Replacement Plier Pads.....P/N 12-01425

WIRE MARKING TOOL



Ever been on your back looking up at a bunch of white wires or in a really tight space where only your arms and shoulders would fit and wonder, "how am I going to tell the difference between all of these wires?" This wire marking tool will allow you to do just that.

The wire marking tool works on wire from 24 ga to 8 ga. This tool is perfect for every mechanic and do it yourselfer. Mark just one wire or all of your wires before you start or while installing in just seconds. 4 and 12 pack of markers sold separately.

Wire Marking Tool.....P/N 12-02497

4 pack colors: Black, Blue, Red, Green.....P/N 12-02501

12 pack colors: Black, Blue, Green, Red, Orange, Yellow, Purple, Brown, Turquoise, Lime, Berry, & Aqua.....P/N 12-02503

POWER PRECISION SCREWDRIVER



General's Cordless Power Precision Screwdriver is ideal for ultra-delicate applications such as computer and electronics repair, hobbies and crafts. The 100+ RPM motor features forward and reverse controls, and the quick-change chuck allows for effortless swapping between 1/8" Slotted, Phillips and Torx bits. **Features:** • Cordless Precision Screwdriver (2 "AAA" alkaline batteries included) • 10+ hours of power • 100+ RPM motor with forward and reverse controls • Super-torque drive • Quick-change chuck • Ergonomic design allows for various comfortable grips • Precision bit assortment (1/8" drive) • Phillips: #00, #0 • Slotted: 1/16", 1/8" • Torx: T5, T6.....P/N 12-02308

AT 540M SCREW EXTRACTOR



This heavy duty screw extractor is designed with a .401 shank to fit most standard rivet guns and is held in place by a retainer spring. The square tip will accommodate 3/8" socket tool bit holders with inserts for removing hex, square, Phillips, or standard screws. Manufactured from high grade shock resistant tool steel.....P/N 12-01632



SCREW REMOVAL TOOL

• Useful in removing screws that are corroded or have stripped heads • .401 Parker taper shank for use in rivet gun • 3/8" square drive with wrench. • Use standard Phillips or Slotted insert bits • Rivet gun required. **Note:** Does not include Tips.....P/N 12-00827

TOOL KITS

RV BUILDER TOOL KIT



These RV builders tool kits are based on recommendations from the Van's Aircraft Builders Manual as well as on the tools that have been purchased from Aircraft Spruce by RV builders. It is an excellent tool kit for the construction of the RV4, 6, 7, 8, and 10 aircraft. They

include an air drill, hand rivet squeezer, rivet sets and other tools of the highest quality. If you are building a RV-9 order 100 extra 3/32" clecos and 50 extra 1/8" clecos. If you are building a RV-10 kit, order 175 extra 3/32" clecos and 125 extra 1/8" clecos as well as the RV-10 bucking bar. See Chart Below for Components

Kit with 2x Rivet Gun.....P/N 12-00890

Kit with 3x Rivet Gun.....P/N 12-00899

RV-10 Bucking bar.....P/N 12-00903

RV BUILDER KIT COMPONENTS

Part No.	Description	Price
12-02004	2x Rivet Gun	.
12-00869	Avery Pneumatic Air Tool Reg.	.
12-00816	Air Drill (Pistol Type)4500rpm	.
12-00872	Avery Air Tool Oil	.
12-00177	Hand Riveting & Dimpling Tool	.
12-00605	Avery Poly. Dimpling Mallet	.
12-00320	3" Yoke For Hand Rivet Squeezer	.
12-00882	Avery 6pc Squeezer Set	.
12-00868	Avery Deluxe Dimple Die Kit	.
12-00613	Avery Pop Rivet Dimpler 3/32"	.
12-00611	Avery Vise Grip Dimpler 3/32"	.
12-00873	Avery 1/8" Dbl Offset Rivet St	.
12-00741	Avery Flush Swivel Rivet Set	.
12-07100-3	Avery Back Rivet Set 4-1/8"L	.
12-00609	Avery Fluting Plier	.
12-00608	Avery Hand Seamer 3-1/2" Jaw	.
12-10105	Cleco Pliers	.
12-00632	Avery Edge Rolling Tool	.
12-00618	Avery Back Riveting Plate	.
12-00876	Avery Cut/Polish Wheel Kit	.
12-03900	Unibit Step Drill # 3	.
12-18355	3m™ Rivet Tape 3/4" Green	.
12-04214	#40 Super Cobalt Drill (4pack)	.
12-04217	Super Cobalt Drill #30 (3pack)	.
12-14221	Super Cobalt Drill #21 (3pack)	.
12-04219	Super Cobalt Drill #27 (3pack)	.
12-00886	Avery #19 Cobalt Drill Bit 2pk	.
12-00885	Avery #12 Cobalt Drill Bit 2pk	.
12-00884	Avery 1/4" Cobalt Drill Bit	.
12-05200	Drill Bits 12" Long 3/32"	.
12-05300	Drill Bits 12" Long 1/8"	.
12-00867	Avery 4pc Drill Stop Set	.
12-00883	Avery 90° Angle Drill Kit	.
12-01412	Avery Micro-Stop Csnk Cage	.
12-00879	Avery #40 X 3/8" Csnk Cutter	.
12-00880	Avery #30 X 3/8 Csnk Cutter	.
12-00881	Avery #20 X 1/2" Csnk Cutter	.
12-00631	Avery Shop Hd Rivet Gauge Set	.
12-00633	Avery Rivet Length Gauge	.
12-00622	Avery Speed Deburr-Csink Tool	.
12-02547	Avery Royal Multi-Burr Tool	.
12-00629	Avery Double Edge Deburr Tool	.
12-00875	7a Deburring Wheel - Medium Grade	.
12-00870	Avery 3/32" Drive Pin Punch	.
12-00871	Avery 1/8" Drive Pin Punch	.
12-00889	Avery 360deg Swivel Pop Rvt TI	.
13-11400	Standard Aircraft Handbook	.

KIT BUILDER AIRCRAFT TOOL KIT



Initially designed for the RV3, RV4 and RV6 builders, this kit has proven to be very popular with virtually all aircraft home builders. It contains our most popular rivet hammer and is an excellent tool kit for RV builders. Weight: 40 lbs.
P/N 12-01145

Part No.	Pcs.	Description	Part No.	Pcs.	Description
02-R18C-12	3	Jobber's Length Drill	07-20-4706	1	Offset Rivet Set, 3-1/2" O.A.L.
02-R18C-28	3		07-20-500	1	
02-306-21	1	Integral Pilot Cutter	07-91	1	Mushroom Rivet Set
02-306-30	1		08-112	1	
02-306-40	1		08-638	1	Bucking Bar
02-441	1	Countersink Cage	08-647	1	
04-M-1/8	175	M' Type Fastener	08-670	1	
04-M-3/32	325		09-RH-2	1	Handi Retainer Spring
04-1120	1	Fluting Plier	10-420-2A	1	Hand Rivet Squeezer, 2" Yoke
04-17	1	Rivet Cutter	17-3XSP	1	USATCO Rivet Gun
02-22022	1	Multi-Burr w/5 Blades	26-200-4703	1	
04-62	1	Cleco Plier	26-200-4704	1	Cupped Squeezer Set
07-10-4703	1	Rivet Set, 3-1/2" O.A.L.	26-200-4705	1	
07-10-4704	1		26-210	2	Flush Squeezer Set
07-10-4705	1		4263PDSB	1	Spring Back Punch & Die
07-10-4706	1	Flush Set, 3-1/2" O.A.L.	4264PDSB	1	
07-10-500	1	Offset Rivet Set, 3-1/2" O.A.L.	62-54404	1	Plastic Kit Box
07-20-4703	1		JSM-705	1	3/8" Reversible Air Drill
07-20-4704	1		TP44	1	Hand Seamer
07-20-4705	1				

RV BUILDERS STARTER KITS



This scaled down version of this RV Builder's Kit contains just the tools you need to get your feet wet with sheet metal construction. The kit closely follows the recommended tools list from Van's RV TRAINING PROJECT-1 and their TOOL BOX KIT projects. This kit is also the minimum recommended set of tools to build the empennage (tail) section of the RV3, RV4, RV7, RV8, RV9, and RV10 series of home built airplanes. Start out with this kit, and when you're ready to do more advanced work, get the upgrade package to take you all the way up to the full RV Builder's Tool Kit.

Description	Part No.	Price
Starter Kit W/ 3x Rivet Gun	12-04850	.
Starter Kit W/ Pro 2x Rivet Gun	12-04851	.
Starter Kit W/ Pro 3x Rivet Gun	12-04852	.
Starter Kit Upgrade Package	12-04853	.

RV-12 QUICKBUILD TOOL KIT



This kit contains all the tools you need to build Van's exciting RV-12 Quickbuild Kit. The RV-12 has become an instant favorite of Light Sport Aviation (LSA) kitplanes because it's so remarkably easy to assemble. It requires virtually no sheet metal skills, and needs little more than a few hand tools. We've made your task even easier by bringing together all the tools you'll need into one complete kit, and priced it to be easy on your wallet. This kit is based on Van's recommended tool list, as well as recommendations from customers.....P/N 12-04849

RV BUILDERS KITS



The RV Builder's Kit has been completely revised to conform to Van's recommended tool list for their very popular line of RV homebuilt airplanes. It contains all of the aviation tools and equipment needed to successfully assemble Van's Aircraft RV-3/3B, RV-4, RV-6/6A, RV-8/8A, RV-9/9A, and the newer RV-7/7A and RV-10 series homebuilt airplanes. It's also an excellent toolkit to assemble the Murphy family of kitplanes, including the Rebel, Elite, Maverick, and Super Rebel; The Precision Aero Mustang S-51D; The Skystar Kitfox; and any other metal airplane.

Description	Part No.	Price
RV Builders Kit W/ Econ 3x Rivet Gun	12-04854	.
RV Builders Kit W/ Pro 2x Rivet Gun	12-04855	.
RV Builders Kit W/ Pro 3x Rivet Gun	12-04856	.

TO

TOOL KITS

MASTER KIT BUILDERS KIT



The Master Kit Builders Kit (TP176MKB) contains all the tools supplied in the "RV" tool kit plus many more. It is designed to supply all the major, most commonly used tools for the building sheet metal aircraft. These items can be used on RV's, Zenair, Questair and Mustang Aeronautic Kits as well as many, many others. A huge savings can be realized by purchasing this kit over the individual tool price. Wt. 50 lbs.....P/N 12-00832.....

Part No.	Pcs.	Description	Part No.	Pcs.	Description
02-R10C-1/4	1	Jobber's Length Drill	08-112	1	Bucking Bar
02-R18C-12	2		08-638	1	
02-R18C-30	4		08-647	1	
02-R18C-40	6		08-670	1	
02-306-21	1	Integral Pilot Cutter	09-RH-2	1	Handi Retainer Spring
02-306-30	1		10-37001	1	POP Swivel Hand Riveter
02-306-40	1		10-420-2A	1	Hand Rivet Squeezer, 2" Yoke
02-441	1	Countersink Cage	17-3XSP	1	USATCO Rivet Gun
04-M-1/8	175	'M' Type Fastener	18-DS-1/4	1	Drill Stop
04-M-3/32	325		18-DS-10	1	
04-1120	1	Fluting Plier	18-DS-30	1	
04-17	1	Rivet Cutter	18-DS-40	1	
02-22022	1	Multi-Burr w/5 Blades	26-200-4703	1	Cupped Squeezer Set
04-63	1	Cleco Plier w/Comfort Grips	26-200-4704	1	
07-10-4703	1	Rivet Set, 3-1/2" O.A.L.	26-200-4705	1	
07-10-4704	1		26-210	2	Flush Squeezer Set
07-10-4705	1		4263PDSB	1	Spring Back Punch! Die
07-10-4706	1		4264PDSB	1	
07-170	1	Flush Mushroom Set w/Guard	53-120	1	POP Dimple Tool
07-20-4703	1	Offset Rivet Set, 3-1/2" O.A.L.	53-70453	1	3 Piece Aviation Snip Set
07-20-4704	1		61-13551	1	Hole Cutter
07-20-4705	1		62-54405	1	Plastic Kit Box
07-20-4706	1		JSM-705	1	3/8" Reversible Air Drill
07-20-500	1	Mushroom Rivet Set	TP44	1	Hand Seamer
07-90	1				

MASTER AIRCRAFT TOOL KIT



This 121-piece complete Aircraft mechanics Kit is excellent for aircraft restoration, repair and manufacturing. It is ideal for the A & P mechanic, student and homebuilder. Kit comes with everything from sheet metal tools to riveting tools in a two-drawer tool chest. This kit includes the top quality riveting hammer manufactured in the U.S.A. Wt. 48 lbs. P/N 12-01126.....

Part No.	Pcs.	Description	Part No.	Pcs.	Description
02-2962-21	1	Threaded Shank Adapter Drill	07-20-4705	1	Offset Rivet Set, 3-1/2" O.A.L.
02-2962-30	1		07-20-4706	1	
02-2962-40	1		07-20-500	1	
02-306-21	1	Integral Pilot Cutter	08-112	1	Bucking Bar
02-306-30	1		08-638	1	
02-306-40	1		08-647	1	
02-441	1	Countersink Cage	08-670	1	
02-1120	1	Fluting Plier	10-420-2A	1	Hand Rivet Squeezer, 2" Yoke
04-200	1	Chip Chaser	149-1	1	Wrench (for Cone Jaw Chuck)
04-5S	1	Hand Metal Punch Kit	15-1580	1	Junior Air Vac
04-501	1	Heavy-Duty Rivet Cutter	17-3XSP	1	Rivet Gun
6-Apr	1	Nibbling Hand Tool	18-DS-10	1	Drill Stop
Apr-62	1	Cleco Plier	18-DS-21	1	
04-EL-1/2-1	3	Side Grip Fastener	18-DS-30	1	
04-EL-1/2-1/2	2		18-DS-40	1	
04-M-1/8	10		20-127-4S	1	90° Angle Drill Attachment
04-M-3/16	10	'M' Type Fastener	20-M3	1	Cone Jaw Chuck
04-M-3/32	10		26-200-4703	1	Cupped Squeezer Set
04-M-5/32	10		26-200-4704	1	
04-WNX-1/8	5	Wing Nut Fastener	26-200-4705	1	
04-WNX-3/16	5		26-210	1	Flush Squeezer Set
04-WNX-3/32	5		46-231-1	1	Strap Duplicator
04-WNX-5/32	5	Rivet Set, 3-1/2" O.A.L.	46-231-2	1	
07-10-4703	1		46-231-3	1	
07-10-4704	1		46-231-5	1	
07-10-4705	1	Flush Rivet Set	53-70453	1	3 Piece Aviation Snip Set
07-10-4706	1		62-54405	1	Plastic Kit Box
07-10-500	1	Flush Mushroom Set w/Guard	75HP575	1	Sheet Metal handbook
07-170	1	Offset Rivet Set, 3-1/2" O.A.L.	JSM-705	1	3/8" Reversible Air Drill
07-20-4703	1	Offset Rivet Set, 3-1/2" O.A.L.	TP44	1	Hand Seamer
07-20-4704	1				

TP83 & TP84 RIVET GUN KIT



Virtually all the tools you need for riveting in kit form. Intended for professional sheet metal mechanics, serious home builder/students. Packed in a sturdy molded plastic case. #1 selling kit. Kit with TP83(3x) GunP/N 12-00240.....

Part No.	Description	Part No.	Description
07-10-4703	3/32" Rivet Set, 3-1/2" O.A.L.	07-20-4705	5/32" Offset Rivet Set, 3-1/2" O.A.L.
07-10-4704	1/8" Rivet Set, 3-1/2" O.A.L.	07-92	Flush Mushroom Rivet Set
07-10-4705	5/32" Rivet Set, 3-1/2" O.A.L.	08-111	Bucking Bar
07-10-4706	3/16" Rivet Set, 3-1/2" O.A.L.	08-112	Bucking Bar
07-11-4704	1/8" Rivet Set, 5-1/2" O.A.L.	08-669	Bucking Bar
07-11-4705	5/32" Rivet Set, 5-1/2" O.A.L.	08-670	Bucking Bar
07-11-4706	3/16" Rivet Set, 5-1/2" O.A.L.	09-140	Power Regulator
07-11-4703	Flat Rivet Set	09-RB-2	Beehive Retainer Spring
07-140	Offset Flush Mushroom Set	09-RH-2	Handi Retainer Spring
07-170	Flush Mushroom Rivet Set w/Guard	17-	Rivet Gun
07-20-4703	3/32" Offset Rivet Set, 3-1/2" O.A.L.	62-14	Molded Plastic Carrying Case
07-20-4704	1/8" Offset Rivet Set, 3-1/2" O.A.L.		

DELUXE STUDENT TOOL KIT



This kit meets most school requirements for basic sheet metal tools. These high quality tools will take the student through school and into the profession for years of outstanding service. It contains the most popular rivet hammer and is a great starter kit. Wt. 14 lbs.....P/N 12-01127.....

Part No.	Pcs.	Description	Part No.	Pcs.	Description
0210A-3/32	3	Jobber's Length Drill	09H-2	1	Handi Retainer Spring
0210A-1/8	3		09B-2	1	Beehive Retainer Spring
0210A-5/32	3		09-140	1	Power Regulator
0210A-3/16	3	Integral Pilot Cutter	17-3	1	Rivet Gun
0210A-1/4	3		07-10-4703	1	Rivet Set, 3-1/2" O.A.L.
02-306-21	1		07-10-4704	1	
02-306-30	1	'M' Type Fastener	07-10-4705	1	
02-306-40	1		07-10-4706	1	Mushroom Set w/ Guard
04-M-1/8	10		07-170	1	
04-M-3/16	10	Countersink Cage	18-D -10	1	Drill Stop
04-M-3/32	10		18-D -21	1	
04-M-5/32	10		18-D -30	1	
02-441	1	Rivet Cutter	18-D -40	1	
04-501	1		62-297	1	Canvas Tool Bag
04-62	1	Cleco Plier	JSM-705	1	3/8" Reversible Air Drill
08-670	1	Bucking Bar			

GLASTAR TOOL KIT



This kit is designed for all new Glastar kit aircraft. The tools included are recommended by the manufacturer, specifically for the assembly of the sheet metal portion of the kit. Many of these tools are of top quality, and designed to last. They are all covered by a 30 day unconditional money back guarantee.....P/N 12-00831.....

Part No.	Pcs.	Description
02-2962-21	1	Hreaded Shank Drill
02-2962-30	1	
02-2962-40	1	
02-306-21	1	Pilot Cutters Countersink
02-306-30	1	
02-306-40	1	
02-306-30-120	1	Pilot Countersink 120°
02-441	1	Countersink Cage
02-501-12-40	3	12" Aircraft Extension Drill
02-501-6-30	3	6" Aircraft Extension Drill
02-501-6-40	3	
02-C1-H	1	Drill Sets 60 (Number Sizes)
02-R10B-1/16	3	Jobbers Length Drill
02-R10B-1/4	3	
02-R10B-11/64	3	
04-200	1	Chip Chaser
04-20SL	1	Offset Snips Left Handed
04-20SR	1	Offset Snips Right Handed
04-22022	1	Multi/Burr-5 5 Blades Included
04-3090-1/2	2	Spring Tension Clamps A-1/2" D-3-1/2"
04-62	1	Cleco Plier For Sheet Metal Fastners
04-EL-1/2-1/2	10	Side Grip Fastener Capacity-0-1/2" Reach 1"
04-EL-3/4-1/2	10	
04-K380	1	Deburr Tool W/ 3/4" Blade
04-M-1/8	150	'M' Type Sheet Metal Fastener
04-M-3/16	25	
04-M-3/32	250	'M' Type Sheet Metal Fastener
04-K380	1	
04-M-1/8	150	Rivet Set, 3-1/2" O.A.L.
04-M-3/16	25	
04-M-3/32	250	Mushroom Rivet Set
07-10-4703	1	
07-10-4704	1	Bucking Bar
07-10-4706	1	
07-170	1	
08-638	1	
08-647	1	Power Regulator
08-721	1	
08-760B-1	1	
09-140	1	
10-37001	1	360° Pop Riveter
1245	1	12" Flex Ruler
17-3XSP	1	Rivet Gun
20-127-4S	1	90° Angle Drill Attachment
53-211-4263	2	Rivet Squeezer Punch & Die Set
53-211-4264	2	
53-420-2A	6	Hand Squeezer Kit
53-RBH-2	2	Beehive & Handi Retainer Spring
61-860	1	Center Punch & Scribe
62-54405	1	Kit Box-Plastic & Metal
CP-785	1	Air Drill, Reversible 3/8" Chuck

TOOL KITS

DELUXE RIVETING KITS



Deluxe Riveting Kit contains everything needed to build and maintain all metal aircraft. This kit is highly recommended for the professional mechanic or the experienced home builder.

Description	Part No.	Price
Deluxe Riveting Kit With Econ 3x Rivet Gun	12-04833	.
Deluxe Riveting Kit With Pro 2x Rivet Gun	12-04834	.
Deluxe Riveting Kit With Pro 3x Rivet Gun	12-04835	.
Deluxe Riveting Kit With Pro 4x Rivet Gun	12-04836	.

MASTER BUILDERS KITS



The Master Builder's Kit is the most comprehensive riveting kit. It contains the tooling needed to build some of the most popular aluminum airplanes, including the RV series, the Thorp T-18, the Midget Mustang, and many others. This kit is also very popular with airframe mechanics needing an all-in-one riveting kit.

Description	Part No.	Price
Master Builders Kit W/ Econ 3x Rivet Gun	12-04837	.
Master Builders Kit W/ Pro 2x Rivet Gun	12-04838	.
Master Builders Kit W/ Pro 3x Rivet Gun	12-04839	.

ACU CENTER TOOL KIT



This Acu-Center tool is a precision measuring aid designed to provide fast, repeatable rod end service and replacement by providing its user with the most accurate rod end adjusted length measurement possible. This is accomplished through the Acu-Center's precision fit, rod end / ball centering flange and absolute zero measuring point.
AGM 1" Acu-Center only not a Kit.....P/N 12-05545

AVIONICS MAINTENANCE KIT



This Avionics Maintenance Kit has all of the essential tools to work on every aspect of aircraft electronics systems. Whether it's a simple electrical repair or a complete system rewire, you'll find this kit indispensable in getting the job done quickly and professionally.....P/N 12-04823

LOYD'S RIVET DRILL GUIDE



This set is designed one size under bore and hardened C1144 steel for long life. The drill lube is to ensure smooth minimal friction between the drill bit and the guide, cooling the bit, keeping it from galling, which aids in longer drill and guide life. Dip drill bit in lubricant at least once for every rivet. The guides are easy to use. First select the appropriate guide for the rivet being drilled. The guides allow you to drill straight and center every time. They are compact, easy to grip and easy to spot if dropped. They were designed to eliminate double drilled holes and drill bits "skating" off of rivets.....P/N 12-03749

RV-12 QUICKBUILD KIT



This kit contains all the tools you need to build Van's exciting RV-12 Quickbuild Kit. The RV-12 has become an instant favorite of Light Sport Aviation (LSA) kitplanes because it's so remarkably easy to assemble. It requires virtually no sheet metal skills, and needs little more than a few hand tools. We've made your task even easier by bringing together all the tools you'll need into one complete kit, and priced it to be easy on your wallet. This kit is based on Van's recommended tool list, as well as recommendations from customers.....P/N 12-04849

ENGINE SPECIALIST KIT



This kit is designed for the engine and powerplant specialist. It contains an array of tools and equipment to take apart, check, inspect, overhaul, and re-assemble just about any type of Aircraft Engine, including all models of Continental and Lycoming.....P/N 12-04824

JOURNEYMANS KIT



This Journeyman kit is for the aspiring A&P Mechanic or Homebuilder who needs a comprehensive professional kit, but is not yet ready for a Master Kit. It contains a broad selection of tools used frequently by the Airframe Mechanics at a price that's affordable to those Journey Mechanics starting out in the field.

Description	Part No.	Price
JBK-2602a w/2602a Econ 3x Gun	12-04825	.
JBK-2x w/ATS Pro 2x Rivet Gun	12-04826	.
Journeyman Builders Kit w/3x Rivet Gun	12-04827	.
Journeyman Builders Kit w/Pro 4x Rivet Gun	12-04828	.

TO

TOOL KITS – RIVET TOOLS

PRO X-SERIES RIVET GUNS



1/8" Aluminum (3/32" Steel) Rivet Capacity. Accepts all .401 shank rivet sets and attachments. Non-slip Powder Coat Finish. 1/4" NPT Inlet. Lifetime ATS-Pro Warranty.

Model No.	BPM	Capacity	Stroke	Part No.	Price
2X	2580	1/8"	2-1/4"	12-04857	.
3X	2160	3/16"	2-7/8"	12-04858	.
4X	1740	1/4"	3-1/16"	12-04859	.

ATS FIELD RIVETING KITS



The ATS Pro Field Kit features top of the line tools. In it you get the best-selling Palm Drill (featuring a true variable speed trigger from 0 to 2600 RPM), plus an assortment of cobalt drill bits in the 4 most commonly use sizes (#40, #30, #21, and #11).

For perfect riveting jobs, ATS gives you the ATS Pro Rivet Gun with feather trigger (including springs), two of ATS most popular Tungsten bucking bars, and a full set of riveting snaps. Included is a set of rivet gauges to make sure you get things right, and a bottle of oil to keep those tools running at peak performance.

It all comes to with a quality shadow-foamed hard tool case, making this the kit you will want to show off!

Black.....P/N 12-05449
Red.....P/N 12-05449-1
Black.....P/N 12-05450

AHRS SYSTEMS TOOL KIT



The fittings capture the tubing with stainless steel retainers. By suppressing the release ring (around the tubing entry port on the fitting), the tubing is easily removed. Within just a few minutes, you'll be able to disconnect and reconnect tubing. O-ring seals, and maintaining precise tubing diameter during the manufacturing process, ensures a reliable seal. For Experimental

Aircraft ONLY. Applicability and suitability of this kit is the responsibility of the builder. Kit Includes: • 2 x 102559-000, Static Port Alum 3/8" NPT • 2 x 102630-000, Fitting Tube Pneumatic Strt Female 1/4" OD PTC X 1/8" NPT • 6 x 102631-000, Fitting Tube Pneumatic Strt Male 1/4"OD PTC X 1/8" NPT • 2 x 102631-001, Fitting Tube Pneumatic Elbow Male 1/4" OD PTC X 1/8" NPT • 25' x 102632-000, Tube Pneumatic Polyethylene 0.17 ID X .25 OD BLU • 25' x 102632-001, Tube Pneumatic Polyethylene 0.17 ID X .25 OD GRN • 35' x 102632-002, Tube Pneumatic Polyethylene 0.17 ID X .25 OD Natural • 3 x 102639-000, Fitting Tube Pneumatic Y Union 1/4" OD • 1 x 102639-001, Fitting Tube Pneumatic T Union 1/4" OD • 1 x 102641-000, Tube Cutter • 30 x 102642-000, Snap Bushing • 2 x 102643-000, Sleeve Alum Coupling Tube 3/16" OD • 2 x 102644-000, Fitting Alum Flared Tube and Pipe Thread 3/16" OD

P/N 12-03283.....

PILOTS TOOL KIT



The fleet of general aviation aircraft is aging. Mandated maintenance promotes reliability, but experienced pilots know mechanical issues can still arise, sometimes far from an open FBO. This Pilot's Tool Kit provides the most common tools and other contents to help get you airborne, including a set of combination wrenches, 8" adjustable wrench,

tire pressure gauge, locking pliers, 6-in-1 screwdriver, hex wrenches, and diagonal cutters. A special aviation spark plug socket handles most spark plug makes, and a way-cool mini-ratchet and socket set provide additional utility. Finally, a telescopic mirror, cable ties, and 30 feet of aviation-grade safety wire are included. Everything is nicely organized into a tough roll-up pouch.....P/N 12-03772.....



BLUE PNEUMATIC R AND D HAND TOOL KIT BP-738K METRIC

BP-738 Hand Tool. Mandrels including M3, M4, M5, and M6. Also includes 40 total pcs of assorted rivet nuts that match included mandrels. Comes in molded plastic case.....P/N 12-04871.....

EFIS SYSTEMS TOOL KIT



The fittings capture the tubing with stainless steel retainers. By suppressing the release ring (around the tubing entry port on the fitting), the tubing is easily removed. Within just a few minutes, you'll be able to disconnect and reconnect tubing. O-ring seals, and maintaining precise tubing diameter during the manufacturing process, ensures a reliable seal. For Experimental Aircraft ONLY. Applicability and suitability of this kit is the responsibility of t • 1 - Union Tee • 2 - Union 90° • 2 - Synthetic Rubber Grommet • 30 - Snap Bushing • 2 - Female Connector • 2 - Static Port • 2 - AN Hardware Assembly • 1 - 25' 1/4" Green Tubing (Pitot) • 1 - 32' 1/4" White Tubing (Static) • 1 - 23' 1/4" Blue Tubing (AOA).....P/N 12-03284.....

ZENAIR HAND RIVETER



Hand Riveter with Custom Machined Heads. Riveter Heads (changeable Nose Bushing piece). ZENAIR blind (or pulled) rivets have been used to construct the all-metal Chris Heintz designs since the 1970s, and make riveting a quick and easy process! The ZENAIR riveting system forms the rivet head as the blind rivet is pulled, providing a low profile dome finish and high shear strength. Fast installation,

simple tools and low cost make this a popular riveting system with homebuilders! **Note:** The riveter is supplied with the custom machined heads, required for the Zenair blind rivets ((for use with Zenair blind rivets, sold separately).....P/N 12-03713.....

ZENAIR PNEUMATIC RIVETER



Pneumatic Riveter with Custom Machined Heads for use with Zenair blind rivets, sold separately ZENAIR blind (or pulled) rivets have been used to construct the all-metal Chris Heintz designs since the 1970s, and make riveting a quick and easy process! The ZENAIR riveting system forms the rivet head as the blind rivet is pulled, providing a low profile dome finish and high shear strength. Fast installation,

simple tools and low cost make this a popular riveting system with homebuilders! **Note:** The riveter is supplied with the custom machined heads, required for the Zenair blind rivets, for use with Zenair blind rivets, sold separately.....P/N 12-03712.....

ZENAIR BLIND RIVETS



These rivets are corrosion resistant, and the stem becomes locked in after being set. Also, not many different lengths are required for different diameters or thicknesses. In the Assembly Instructions, they are designated as A4 (1/8) and A5 (5/32).

Note: Sold in packages of 100.

Description	Length	Grip	Drill	Min. Single Shear Length	Part No.	Price
A4 Blind Rivet	1/8" / 3.2mm	1/4" / 6.4mm	#30	110 lbf / 50kg	12-05538	.
A5 Blind Rivet	5/32" / 4mm	5/16" / 7.9mm	#20	180 lbf / 80kg	12-05539	.

NUMATX HTS-C3K HYDRAULIC RIVET SQUEEZER



The Numatx HTS-C3K C-Squeezer System is a hydraulically operated hand held tool, designed to squeeze up to 1/8" diameter aircraft grade rivets (AD alloy). This unit is hydropneumatic operated (also known as pneumatic). The system is comprised of an

HTC-3 hand-held C-Squeezer unit and an HTI-10 Pressure Intensifier. The fully hydraulic C-Squeezer offers the advantages of decreased weight, smaller size, and constant force when compared to traditional pneumatic only squeezers. This reduces operator fatigue, allows for use in more confined areas, and improves control of the squeezing action (feathering operation). The units are built from high-quality aircraft grade materials, with parts made on CNC machining centers and features held to close tolerances, for years of dependable operation.

Description	Part No.	Price
System Only - No Yoke	12-05135	.
System with 1.5 in Yoke	12-05136	.
System with 3 in Yoke	12-05137	.
System with 4 in Yoke	12-05138	.




NOVA® STRAIGHT GRINDER

Maximum Air Pressure: 90 PSI **Standard Equipment Includes:** • 1/4" Erikson Collet • Two Collet Wrenches **Capacity:** • 1/8", 1/4" Shank Carbide Burs • 1" Mounted Wheel • 3" Cut off Wheel • 25,000 RPM **Features:** • .3 HP • Air Inlet: 1/4-18 NPT • Rear Exhaust • Motor housing milled from solid bar for precision motor alignment. • Motor cylinder and rotor are hardened alloy steel to ensure proper alignment and long life. • Smooth Quiet Operation P/N 12-05591



NOVA® 90° GRINDER

Maximum Air Pressure: 90 PSI **Standard Equipment Includes:** • 1/4" Erikson Collet • Two Collet Wrenches **Capacity:** • 1/8", 1/4" Shank Carbide Burs • 1" Mounted Wheel • 3" Cut off Wheel **Features:** • .3 HP • Air Inlet: 1/4-18 NPT • Rear Exhaust • Motor housing milled from solid bar for precision motor alignment. • Motor cylinder and rotor are hardened alloy steel to ensure proper alignment and long life. • Smooth Quiet Operation 12,000 RPM.....P/N 12-05593



NOVA® 5 1/2 INCH EXTENDED LONG REACH GRINDER

Maximum Air Pressure: 90 PSI **Standard Equipment Includes:** • 1/4" Erikson Collet • Two Collet Wrenches **Capacity:** • 1/8", 1/4" Shank Carbide Burs • 1" Mounted Wheel • 3" Cut off Wheel • 25,000 RPM **Features:** • .3 HP • Air Inlet: 1/4-18 NPT • Rear Exhaust • Motor housing milled from solid bar for precision motor alignment. • Motor cylinder and rotor are hardened alloy steel to ensure proper alignment and long life. • Smooth Quiet Operation.....P/N 12-05594



NOVA® STRAIGHT GRINDER FRONT EXHAUST

Maximum Air Pressure: 90 PSI **Standard Equipment Includes:** • 1/4" Collet • Two Collet Wrenches **Capacity:** • 1/8", 1/4" Shank Carbide Burs • 1" Mounted Wheel • 4" Cut off Wheel • 18,000 RPM / 20,000 RPM **Features:** • -18,000 RPM • .9 HP • Air Inlet: 1/4-18 NPT • Front Exhaust • Motor housing milled from solid bar for precision motor alignment. • Motor cylinder and rotor are hardened alloy steel to ensure proper alignment and long life. • Smooth Quiet Operation 18,000 RPM.....P/N 12-05595



NOVA® PENCIL GRINDER

• Smooth Quiet Operation • 1/8" Collet • 60,000 RPM • Hardened Alloy Steel Cylinder • Rear Exhaust With Over Hose Muffler • Motor housing milled from solid aluminum bar for precision motor alignment • Maximum Air Pressure 90 PSI • Includes Two Wrenches, Hose, and Air Fitting. P/N 12-05597



NOVA® 90° ANGLE HEAD

• The #1 industry best seller, a must have for all mechanics. • Accepts 1/4-28 Threaded Angle Bits. • Capacity: 1/4" • Angle Head may be rotated 360° for superior operator control • Air Inlet 1/4-18 NPT • Motor housing milled from solid bar for precision motor alignment • Motor cylinder and rotor are hardened alloy steel to ensure proper alignment and long life • Smooth quiet operation • One Year Warranty P/N 12-05599

NOVA® 90° HEAVY DUTY ANGLE HEAD



• Capacity: 1/4" • Rear Exhaust Angle Head may be rotated 360° for superior operator control • Air Inlet 1/4-18 NPT P/N 12-06484

NOVA® 3000 RPM COMPACT MOTOR HOUSING WITH 90° ANGLE HEAD



• Accepts 1/4-28 Threaded Angle Bits • Capacity: 1/4" • Rear Exhaust • Angle Head may be rotated 360° for superior operator control • Air Inlet 1/4-18 NPT P/N 12-06488



NOVA® 90° FLAT OFFSET COMPACT ANGLE HEAD

• Accepts 1/4-28 Threaded Angle Bits • Capacity: 1/4" • Rear Exhaust • Angle Head may be rotated 360° for superior operator control • Air Inlet 1/4-18 NPT P/N 12-06487



NOVA® 45° ANGLE HEAD

• Accepts 1/4-28 Threaded Angle Bits • Capacity: 1/4" • Rear Exhaust • Angle Head may be rotated 360° for superior operator control • Air Inlet 1/4-18 NPT • Motor housing milled from solid bar for precision motor alignment • Motor cylinder and rotor are hardened alloy steel to ensure proper alignment and long life • Smooth quiet operation • One Year Warranty • For those hard to get to areas • This industry standard tool is a must have for every mechanic • Scroll down to purchase complete Nova tool.....P/N 12-05601



NOVA® ORBITAL SANDER

• Standard Equipment Includes: 2" and 3" Holder • Maximum Air Pressure: 90 PSI • Air Inlet 1/4-18 NPT • Rear Exhaust • 12,000 RPM • Motor housing milled from solid bar for precision motor alignment • Motor cylinder and rotor are hardened alloy steel to ensure proper alignment and long life • Orbital Action produces a swirl free surface • Smooth quiet operation • Shown with 3" disc holder. Compact design and 90° Angle head for tight work areas. P/N 12-05598



NOVA COMPACT PISTOL GRIP DRILLS

• Feathering Trigger Allows Operator Complete Control of Speed • 360° Rotatable Exhaust • Quiet Smooth Operation • Air Inlet 1/4-18 NPT • Rubber Grip for Operator Comfort • One Year Warranty

1/4 Inch Chuck and KeyP/N 12-05587
1/4 Inch Keyless Chuck.....P/N 12-05588
3/8 Inch Chuck and KeyP/N 12-05589



NOVA® LONG REACH 90° ANGLE HEAD

• Accepts 1/4-28 Threaded Angle Bits • Capacity: 1/4" • Rear Exhaust • Angle Head may be rotated 360° for superior operator control • Air Inlet 1/4-18 NPT.....P/N 12-06486



NOVA COMPACT PISTOL GRIP DRILLS

• Feathering Trigger Allows Operator Complete Control of Speed • 360° Rotatable Exhaust • Quiet Smooth Operation • Air Inlet 1/4-18 NPT • 1/4" Keyless Chuck or Chuck and Key • One Year Warranty

2600 RPM with 1/4 Inch Chuck and Key.....P/N 12-06489
2600 RPM with 1/4 Inch Keyless Chuck.....P/N 12-06490
3200 RPM with 1/4 Inch Chuck and Key.....P/N 12-06493
3200 RPM with 1/4 Inch Keyless Chuck.....P/N 12-06494
4000 RPM with 1/4 Inch Chuck and Key.....P/N 12-06491
4000 RPM with 1/4 Inch Keyless Chuck.....P/N 12-06492



COMPACT PISTOL GRIP REVERSIBLE DRILL 2000 RPM WITH 1/4 CHUCK KEY

• Feathering Trigger Allows Operator Complete Control of Speed • 360° Rotatable Exhaust • Air Inlet 1/4-18 NPT 2000 RPM with 1/4 Inch Chuck and Key.....P/N 12-06495
3100 RPM with 1/4 Inch Chuck and Key.....P/N 12-06496



NOVA® 360° ANGLE HEAD WITH .5 HORSEPOWER MOTOR

• Accepts 1/4-28 Threaded Angle Bits • Capacity: 1/4" • Rear Exhaust • Angle Head may be rotated 360° for superior operator control.....P/N 12-06483



NOVA® STANDARD MOTOR HOUSING WITH 45° ANGLE HEAD

• Accepts 1/4-28 Threaded Angle Bits • Capacity: 1/4" • Rear Exhaust • Angle Head may be rotated 360° for superior operator control 2800 RPM with 90° Head.....P/N 12-06479
3200 RPM with 90° Head.....P/N 12-06482
900 RPM with Long Reach 90° Head.....P/N 12-06485



NOVA® STANDARD MOTOR HOUSING WITH 45° ANGLE HEAD

• Accepts 1/4-28 Threaded Angle Bits • Capacity: 1/4" • Rear Exhaust • Angle Head may be rotated 360° for superior operator control. 2800 RPM with 45° Head.....P/N 12-06480
3200 RPM with 45° Head.....P/N 12-06481

RIVETING HAMMERS



US 3X

RIVETING HAMMERS

These high quality riveting hammers are excellent for all light aircraft metal riveting applications. They feature a convenient offset handle (except Model US3AA which is straight handle) and come complete with retainer spring and regulator. All models feature metered teasing trigger, made in U.S.A.

Part No.	Blows / Min.	Capacity		Stroke	Length	Weight (Lbs.)	Price
		Alum.	Bore				
US1X	3600	1/8"	9/16"	1-1/2"	5-11/16"	2	.
US2X	2580	1/8"	1/2"	2-1/4"	6-11/16"	2-1/4	.
US5X	1560	1/4"	3/4"	2-11/16"	6-11/16"	4-3/4	.
US7X	900	3/8"	3/4"	5-13/16"	8-5/16"	6	.



2X

AIRCRAFT RIVET GUNS

The standard tool used in aircraft manufacturing plants such as Boeing, Rockwell, Lockheed etc., is completely interchangeable with Chicago Pneumatic. These tools are slow hitting with excellent finger tip control. Accepts all .401 shank rivet sets and attachments. All guns are brand new and carry a full 1 year warranty.

Part No.	Blows / Min.	Capacity Alum.	Bore	Stroke	Weight (Lbs.)	Price
2X	2580	1/8"	1/2"	2-1/4"	2.7	.
3X	2160	3/16"	1/2"	2-7/8"	3.4	.
4X	1740	1/4"	1/2"	3-1/16"	3.6	.



PNEUMATIC RIVET SQUEEZER

Heavy duty industrial tools are manufactured to exacting standards to insure long service life. All critical parts, including the yoke, are fabricated from 4130 steel and heat treated to Rc 42-46. These rivet squeezers have earned a reputation for durability and reliability through years of service on the production lines of major airframe manufacturers such as Grumman, Piper, Beech and Cessna. Easily operated by one hand. All replacement parts and other yoke designs available. Features feathering throttle.

Specification	Model	
	3000	6000
Max. Force	3000	6000
Rivet Capacity Dural	1/8"	3/16"
Steel	3/32"	5/32"
Standard Yoke Reach	2"	2"
Air Hose Size	1/4"	1/4"
Set Travel	9/16"	9/16"
Recommended Line Pressure	90 PSI	90 PSI
Weight	6 lbs.	6 lbs.

3000.....P/N 12-03400
6000.....P/N 12-03500

SNAP SOC RIVET SET CAPS



Insert these caps onto the ends of your rivet sets to provide a protective zone between the rivet set and the rivet. Helps to prevent against damage to the rivet or adjoining aircraft skin. Color coded for easy use. Each cap lasts for approximately 50-70 rivets. Sold in Packs of 10. Colors: White (3/32"), Orange (1/8"), Green (5/32"),

Yellow (3/16"), Blue (1/4"). Note: Rivet Set pictured is not included.
3/32 White (Pk of 10)P/N 12-03363
1/8 Green (Pk of 10).....P/N 12-06447
5/32 Green (Pk of 10).....P/N 12-03365
3/16 Yellow (Pk of 10).....P/N 12-03366
1/4 Blue (Pk of 10)P/N 12-03367



TP82 AND TP84 RIVET GUNS

This "X" type feathering trigger riveter is the only rivet gun that allows you to slowly begin riveting without damage to the skin. This is critical in performing riveting operations. This gun is used by aircraft mechanics worldwide. It's also the perfect tool for kit builders. **Note:** Long term exposure to low frequency vibration caused by riveting may be harmful to your hands and arms. We suggest you take frequent breaks when riveting to reduce this exposure. **Features:** • Takes .401 shank rivet sets • Lightweight aluminum handle • Price includes spring retainer & regulator (TP97) • Precision machined hardened and ground valve • "Sure Grip" powder coated finish • Teasing trigger • Precision machined and hardened cylinder for long life • Made in the U.S.A.

2X Rivet Gun (1/8" Capacity)P/N 12-02004

3X RIVET GUN KIT



Virtually all the tools you need for riveting in kit form. Intended for professional sheet metal mechanics, serious home builder/students. Packed in a sturdy molded plastic case. #1 selling kit. Visit www.aircraftspruce.com for a complete list of kit contents.

P/N 12-00240

ATS ECONOMY RIVETING KIT (3X)



This cost-saving riveting kit features ATS's popular 2602A Rivet Gun, a selection of 4 Bucking Bars (141, 142, 148, and 149), plus a complete assortment of Rivet Sets to install Universal Head (AN470) or Flush (AN426) rivets in sizes 3/32" to 3/16". Comes to you in a stylish molded case to keep things neatly organized. This is the perfect "field" kit to take

with you anywhere -- it has the riveting tools you need conveniently laid out in one handy ready-to-go packageP/N 12-03195

SPECIAL DIMPLING & RIVET SET

FOR RV4, RV6, RV8 AIRCRAFT



This 21-piece dimpling and riveting set was designed especially for use in the construction of the Vans RV aircraft series, however is ideal for a variety of other aircraft as well. All the riveting sets and dimple dies are made from heat treated stainless steel. Dimpling & Riveting Kit Contents: Set holder block, Cup sets, Flat sets, and Spring back dimple dies. Dimple Dies 3/32", 1/8" for rivets; 6-32, 8-32, 10-32 for screws. Cup Sets 3/32", 1/8", 5/32". Flat Sets 1/16", 1/8", 3/16", 1/4", 5/16", 3/8", 1/2". Polyethylene 4" X 4" storage block.

21-piece kitP/N 12-00450

7-PC RIVET SET



Holder includes 3/32", 1/8", 5/32 and 3/16 cups for AN470 rivets, plus 3 flat sets for AN426 rivets. To be used with pneumatic or hand rivet squeezerP/N 12-00555

6-PC DIMPLE DIE SET RIVET SIZE



Holder includes springback dimple dies for 3/32", 1/8" and 5/32" rivets. To be used with pneumatic or hand rivet squeezer.

P/N 12-00560

6-PC DIMPLE DIE SET SCREW SIZE



Holder includes springback dimple dies for 6-32, 8-32 and 10-32 screw sizes. To be used with pneumatic or hand rivet squeezer.

P/N 12-00565

SAFETY CABLE KIT



Safety Cable is a system used to secure hardware. Unlike traditional lock wire, Safety Cable is a much cleaner and faster way to secure hardware in critical areas of an aircraft. The

system consists of a crimping tool and cables. **Specifications:** • .032" Diam. x 18" Cable Length • Type 321 CRES • Includes 50 cables with a magazine with 50 ferrulesP/N 12-04569

RIVET SETS FOR RIVETING HAMMERS



RIVET SETS STRAIGHT .401 SHANK (AN470)

Length "L"	Part Numbers					Price
	Rivet Size 3/32"	Rivet Size 1/8"	Rivet Size 5/32"	Rivet Size 3/16"	Rivet Size 1/4"	
3-1/2"	SM10-4703	SM10-4704	SM10-4705	SM10-4706	SM10-4708	.
5-1/2"	SM11-4703	SM11-4704	SM11-4705	SM11-4706	SM11-4708	.
7-1/2"	SM12-4703	SM12-4704	SM12-4705	SM12-4706	SM12-4708	.
10-1/2"	SM13-4703	SM13-4704	SM13-4705	SM13-4706	SM13-4708	.



RIVET SETS STRAIGHT .498 SHANK (AN470)

Length "L"	Part Numbers					Price
	Rivet Size 3/32"	Rivet Size 1/8"	Rivet Size 5/32"	Rivet Size 3/16"	Rivet Size 1/4"	
3-1/2"	SM30-4703	SM30-4704	SM30-4705	SM30-4706	SM30-4708	.
5-1/2"	SM31-4703	SM31-4704	SM31-4705	SM31-4706	SM31-4708	.
7-1/2"	SM32-4703	SM32-4704	SM32-4705	SM32-4706	SM32-4708	.



FLUSH SETS STRAIGHT .401 SHANK (AN426)

Dia.	Length	P/N	Price	Dia.	Length	P/N	Price
1"	2-1/2"	SM90	.	1-1/4"	3"	SM94	.
1"	3"	SM91	.	1-1/2"	3-1/8"	SM96	.
1"	5-1/2"	SM92	.	1-3/4"	3-1/4"	SM97	.

NOTE: These flush sets are universal for any diameter rivet. Order by part number referencing the length and diameter of the flush set required.



FLUSH SETS STRAIGHT .498 SHANK (AN426)

Dia.	Length	Part No.	Price	Dia.	Length	Part No.	Price
1"	3"	SM101	.	1"	5-1/2"	SM102	.

NOTE: These flush sets are universal for any diameter rivet. Order by part number referencing the length and diameter of the flush set required.

SETS FOR HIGH SHEAR RIVETS .401 SHANK



Length on all is 3-1/2"

Rivet Size	Part No.	Price
5/32"	SMHS10-5	.
3/16"	SMHS10-6	.
1/4"	SMHS10-8	.



RIVET SETS OFFSET .401 SHANK (AN470)

Length "L"	Part Numbers					Price
	Rivet Size 3/32"	Rivet Size 1/8"	Rivet Size 5/32"	Rivet Size 3/16"	Rivet Size 1/4"	
3-1/2"	SM20-4703	SM20-4704	SM20-4705	SM20-4706	SM20-4708	.
5-1/2"	SM21-4703	SM21-4704	SM21-4705	SM21-4706	SM21-4708	.
7-1/2"	SM22-4703	SM22-4704	SM22-4705	SM22-4706	SM22-4708	.
10-1/2"	SM23-4703	SM23-4704	SM23-4705	SM23-4706	SM23-4708	.

FLUSH SETS OFFSET .401 SHANK (AN426)



Dia.	Length	Part No.	Price
1"	3-1/2"	SM140	.
1"	5-1/2"	SM141	.

NOTE: These flush sets are universal for any diameter rivet. Order by part number referencing the length and diameter of the flush set required.



OFFSET FLUSH MUSHROOM SETS

Model #	Length	Description	Part No.	Price
07-140	3-1/2" (89 mm)	Offset Flush Set .401 Shank 1" Face	12-03738	.
07-141	5-1/2" (140 mm)	Offset Flush Set .401 Shank 1" Face	12-03739	.
07-142	7-1/2" (191 mm)	Offset Flush Set .401 Shank 1" Face	12-03741	.



OFFSET FLUSH SET

Excellent for limited access areas.

Specifications: • Shank: 0.401 • Surface Face: 1" x 1 1/2" P/N 12-02892



"T" FLUSH SET

T Flush Set.

Specifications: • Surface: 1 1/2" x 1 1/2". Overall Length: 5 3/4". Weight: 0.50 lbs. Shank: 0.401 P/N 12-02894



BUCKING BLOCKS

Designed to be used with a riveting gun or by striking with a hammer. For aid with dimpling and/or riveting applications. Acts as a holding fixture for .187 shank dimple dies or rivet sets. Weight: 4 lbs P/N 12-00805



SWIVEL DIMPLING TOOL .401 SHANK

*Can be used with TP93 Bucking Block

***Example: To order L = 3-1/2 - 1/8" Rivet specify: SM10SP-4264

Model #	"L"	Type	Price
SM10SP***	3-1/2"	Punch	.

Cupings	3/32	1/8	5/32	3/16
For 100° Rivets (AN426)	4263	4264	4265	4266



KNOCKOUT PUNCHES FOR HIGH SHEAR RIVETS

Knockout punches for high shear rivets .40 shank. Made in the U.S.A.

Description	Length	Rivet Size	Part No.	Price
SMHS401K-4	3-1/2"	1/8"	12-01116	.
SMHS401K-5	3-1/2"	5/32"	12-01117	.
SMHS401K-6	3-1/2"	3/16"	12-01118	.
SMHS401K-8	3-1/2"	1/4"	12-01119	.

.401 SHANK RIVETING HAMMER ACCESSORIES



Description	Part No.	Price	Description	Part No.	Price
Moil Point	12-05096	.	Spotweld Breaker	12-05102	.
Panel Cutter	1957	.	Scraper	12-05103	.
Chisel	12-05099	.	Flush Set	12-01270	.
Rivet Buster	12-05101	.			



RETAINER SPRINGS

Retainer springs comes in two styles: Quick Change Type: Designed to make possible speedy changing of rivet set in rivet gun. Beehive Type: Designed as a fixed type to securely hold rivet set in rivet gun.

Type	Rivet Hammer	ID	OD	Part No.	Price
Beehive	1X-2X-3X-4X; E3-E5; 3R-5R	1.09"	1.06"	12-01077	.
Beehive	5X-7X-9X	1.5"	1.2"	12-01078	.
Quick Change	AVC 10,11,12,13	1.40"	1.14"	12-01073	.
Quick Change	100B-200B,E3,E5	1.09"	1.06"	12-01079	.



STUBBY MICROSTOP

Stubby Microstop 1/4"-28 Threaded Shank for use in angle motors. Adjustable in 0.001" increments. 1/4"-28 female threads. 1/2" cutter capacity. Rated for 3,000 RPM use.

P/N 12-02893



BACK RIVETING RIVET SET

For back riveting flush rivets on RV control surfaces and other homebuilts. Has a plastic Delrin sleeve with spring to hold multiple sheets of aluminum together while riveting. 0.401 shank x 4-1/8 inches long.


Back Rivet Set 3-1/2" long

P/N 12-07100-3 ea.


TO

BUCKING BARS


Our bucking bars are cast with ductile iron to insure non-porous finish which is very important in order to have a highly polished finished surface. They are heat treated to 38-42 RC and therefore can be repolished many times without changing hardness. This wide selection of sizes, shapes, and weights enables the aircraft builder to pick the proper bar for his job. Made in the U.S.A.




12-01302 2-3/4 Lbs.



12-01303 3 Lbs.




12-03768 3 Lbs.




12-01306 2 Lbs.




12-01307 1-3/4 Lbs.




12-01309 1-1/4 Lbs.




12-01310 2-3/8 Lbs.




12-01311 1-1/4 Lbs.




12-01312 3-5/16 Lbs.



12-01315 1-1/2 Lbs.




12-01319 1-3/4 Lbs.




12-03736 1-1/4 Lbs.




12-01280 1-3/8 Lbs.




12-01281 3 Lbs.




12-01285 1-1/2 Lbs.




12-01286 3/4 Lb.




12-01282 1-3/8 Lbs.




12-01290 1 Lb.




12-01291 1-1/4 Lbs.



12-00828 2-1/4 Lbs.




12-00841 1-1/2 Lbs.




12-01294 2 Lbs.




AT-618 2-1/4 Lbs.



12-01295 1 Lb.



12-01298 1-3/4 Lbs.



12-01299 2-1/4 Lbs.

TO

BUCKING BARS – V-DRILL – V-TAP GUIDES



BUCKING BAR 601

5.25 lbs.P/N 12-02907



BUCKING BAR 638

1.25 lbs. Style BP/N 12-02899



BUCKING BAR 670

2 lbs. Style A.....P/N 12-02898



BUCKING BAR 692

2.9 lbs.P/N 12-02909



BUCKING BAR 736

2.11 lbs.P/N 12-02908



BUCKING BAR 750U-1

1.65 lbs.....P/N 12-02906



BUCKING BAR KIT

This starter kit contains the most commonly used bucking bars. Multi-finished surfaces for numerous applications. Heat treated for durability.

• 1 AT638 Bucking Bar • 1 AT681 Bucking Bar • 1 AT647 Bucking Bar • 1 AT670 Bucking Bar

.....P/N 12-00840



ATS TUNGSTEN BUCKING BAR KIT - 4 PIECES

Tungsten bucking bar kit containing our most popular bucking bars. ATS6005, ATS6006, ATS6007, ATS6008, and comes in custom line foam case.P/N 12-05453



ATS TUNGSTEN BUCKING BAR SET - 7 PIECES

7 Piece Tungsten bucking bar kit containing the complete set of tungsten bucking bars. The bars come in a custom foam lined case.P/N 12-05452



BUCKING BAR KEEPER

Protect Your Workpiece: The Bucking Bar Keeper is specifically designed to fit seamlessly onto a standard ATS 6007 Tungsten Bucking Bar. It acts as a reliable shield, preventing your bar from accidentally dropping onto your precious workpiece. Eliminate Riveting Woes: If you've ever riveted wing skins, you know the agony of mistakenly dropping your bar into critical areas like the

leading edge or, worse, onto the spar. With the Bucking Bar Keeper, those worries are a thing of the past.P/N 12-06310



BUCKING BAR BUMPER ST

Say Goodbye to Taping: With our Bucking Bar Bumper, you can bid farewell to the time-consuming practice of taping your bucking bar. Achieve professional-grade rivets without the hassle.

Perfect Rivets Every Time: Precision is paramount in riveting, and our guide is designed to help you set the perfect rivet every single time. No more rework or subpar results.

Compatible with Standard Tungsten Bucking Bars: The Bucking Bar Bumper is tailor-made to fit standard 1x4x5/8 tungsten bucking bars, specifically model ATS 6007. It's the perfect companion for your trusted tool.....P/N 12-06305



V-DRILL PORTABLE GUIDES

The V-Drill Guide is like a portable drill press for precision alignment. V-groove along the bottom of the guide allows for perpendicular alignment with all drill sizes on round parts and corners. Bottom surface is precision ground to assure stability and accurate perpendicular alignment on flat surfaces.

Drill guide is sized for drill bit sizes: 1/8" to 3/8", and made for 17 standard drill sizes (1/8 to 3/8 in 1/64 increments). Guides are made from special nickel alloyed steel that is heat treated for durability. Drill Straight - Every Time! Drill Guide comes with a handy plastic storage case and is 100% American Made Quality. **Features:** • Accurate - 90 degree V-groove along the bottom - automatically squares up the drill with the surface • Portable - Pocket size - Reusable plastic storage tube • Built to Last - Special nickel alloyed steel • High Quality - Natural steel finish - non-plated - Heat-treated for durability.

1/8" to 3/8"P/N 12-02937
3/8" to 1/2"P/N 12-03455



V-TAP GUIDES

The V-Tap Guides are for regular ground taps for hand tapping threads into pre-drilled holes. Works great on flat surfaces, round parts, and angled edges. Tap Straight - Every Time!

Standard: Guide holes are sized for ANSI Standard Ground Taps (0-80, 1-64, 1-72, 2-56, 2-64, 3-48, 3-56, 4-36, 4-40, 4-48, 5-40, 5-44, 6-32, 6-36, 6-40, 8-32, 8-36, 8-40, 10-24, 10-32, 1/4-20, 1/4-28, 5/16-18, 5/16-24, 3/8-16, 3/8-24, 7/16-14, 7/16-20, 1/2-13, 1/2-20, 5/8-11, 5/8-18). A protective plastic storage tube is includedP/N 12-02938

Metric: Guide holes are sized for ANSI Standard Ground Thread Metric Taps (1.6mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 5mm, 6mm, 8mm, 10mm, 12mm, 14mm, 16mm). A protective plastic storage case is includedP/N 12-02939

STI V-TAP GUIDES (SCREW THREAD INSERTS)

The STI (Screw Thread Insert) V-Tap Guides are for Helicoil type taps to repair striped out threads.

STI V-TAP Guide (Unified Course Threads):

Can handle standard ground STI hand tap sizes: 9/16-12, 1/2-13, 7/16-14, 3/8-16, 5/16-18, 1/4-20, 12-24, 10-24, 8-32, 6-32

.....P/N 12-02940

STI V-TAP Guide (Unified Fine Threads): Can handle standard ground STI hand tap sizes: 5/8-18, 9/16-18, 1/2-20, 7/16-20, 3/8-24, 5/16-24, 1/4-28, 10-32, 8-36P/N 12-02941

TUNGSTEN BUCKING BARS



Dims: 4" long, 1" wide, 5/8" high

Weight: 1.6 lbsP/N 12-04861



Dims: 5/8" long, 1.5" wide, 2" high

Weight: 1.2lbsP/N 12-04862



Dims: 3/4" long, 1.5" wide, 2.5" high

Weight: 1.6 lbsP/N 12-04863



Dims: 2" x 1-1/2" x 5/8"

Weight: 1.33 lbsP/N 12-04864



Dims: 5/8" long, 1" wide, 1/4" high

Weight: 1.3 lbsP/N 12-04865



Dims: 1" long, 1" wide, 2.25" high

Weight: 1.4 lbs highP/N 12-04866



BUCKING BAR BUMPER CLEVELAND

Say Goodbye to Taping: With our Bucking Bar Bumper, you can bid farewell to the time-consuming practice of taping your bucking bar. Achieve professional-grade rivets without the hassle.

Perfect Rivets Every Time: Precision is paramount in riveting, and our guide is designed to help you set the perfect rivet every single time. No more rework or subpar results.

Compatible with Standard Tungsten Bucking Bars: The Bucking Bar Bumper is tailor-made to fit standard 1x4x5/8 tungsten bucking bars, specifically model ATS 6007. It's the perfect companion for your trusted tool.....P/N 12-06306

TO

RIVET TOOLS

RIVET REMOVAL TOOL



This quality tool enables the user to quickly and accurately remove rivets and blind fasteners. The tool comes complete with drill bits and guides, #40, #30, #21, and #10. Made in U.S.A.

P/N 12-00817

REPLACEMENT BITS

P/N 12-01128 - #10 P/N 12-01130 - #30
P/N 12-01129 - #21 P/N 12-01131 - #40

HAND RIVETING & DIMPLING TOOL



Used for hand dimpling of skins and small parts and for hand riveting of parts, assemblies, and spars. This tool maintains alignment of the dies to each other, and insures proper alignment to the work surface for superior dimpling results over either rivet gun or free-hand dimpling methods. **Features include:** • 22" deep x 4" tall throat • Heavy wall 1" x 2" steel tube arm • Heavy wall aluminum channel base • Bronze 1/2" I.D. guide bushings for shafts • Heat treated and centerless ground stainless steel driver shaft (2) – one shaft has flat end for riveting with rivet gun & one shaft accepts 0.187" shanks for dimple dies & sets. • 1.5" extension shaft for dies • Adjustable die holder block. Rivet Tool Return Spring Kit now included (Spring, collar and wrench). Great for one handed dimpling of skins and parts. Uses rivet, dimple and die sets with .187" shank. (Dies and sets sold separately)

P/N 12-00177

DRDT-2 RIVET DIMPLER



DRDT-2 (AKA Dash 2) is a welded steel c-frame rivet dimpler. Replaces the common impact c-frame rivet dimplers of the past. With its ample mechanical advantage, dimpling is fast, easy, less fatiguing and safe on the skins. With a fully adjustable set holder you can achieve consistent and accurate dimples. The DRDT-2 incorporates a new low force spring return system that prevents skin damage from the accidental release of the handle without increasing the force required to dimple. 22" throat depth allows dimpling of up to 44" wide sheets. The relief under the lower frame member provides dimpling access to spars, ribs, leading edge skins. Designed and analyzed using state of the art engineering tools the DRDT-2 can handle all your dimpling needs on your project. The DRDT-2 is painted with an industrial powder coat giving one of the toughest finishes available.

Features: • Weight: 60 lbs • Size: 28"X16"X3" • Capacity: Up to 22" depth • Gap: 4" • Skin thickness: Up to 0.040" Aluminum. Dimple Dies: 3/16" shank Diameter.

Rivet Dimpler.....P/N 12-00907
Dimple Die Rivet Set.....P/N 12-00560
Dimple Die Screw Set.....P/N 12-00565

ATS POP DIMPLE DIES



This product is a clever way to set dimple in sheet metal using a pop riveter. Just place both halves on the sheet metal insert in your riveter and squeeze to form a perfect dimple.

3/32".....P/N 12-00169
1/8".....P/N 12-01179

DRILL STOPS



Lock on drill with set screw. Regulate hole depth, cushion the breakthrough. Eliminate surface marks & reduce drill breakage.

#40 Drill.....P/N 12-08800
#30 Drill.....P/N 12-08900
#28 Drill.....P/N 12-09000
#21 Drill.....P/N 12-09100
#20 Drill.....P/N 12-09200
#12 Drill.....P/N 12-09300
#10 Drill.....P/N 12-09400
1/4" Drill.....P/N 12-09500

SQUEEZER TIP



Precision at Its Finest: Our Squeezer Tips are designed to fit seamlessly onto a 1/2" OR 3/8" diameter flush dies. They excel at compressing sheet metal before rivet setting, ensuring unrivaled precision in your work.

Better Than Old Tubing Trick: While the tubing trick has been a go-to method, our Squeezer Tips take it up a notch. You can now achieve superior tolerances on every rivet, making your riveting projects top-notch and hassle-free.

Centered Shop Head: One added benefit of using our Squeezer Tips is that they effortlessly position the shop head in the center of the flush die. No more accidental "slopers" – just perfect rivets every time.

P/N 12-06307

OOPS HOLE SAVER RIVET KIT



"OOPS" Hole saver rivet kit. NAS 1097 rivets are 100° flush rivets with a smaller head. The 1/8" 1097 rivet head is the same size diameter as the normal 3/32" 426 Flush rivet. Easy fix on mistakes made on 3/32" flush rivets. The 3/32" NAS 1097 rivets are great for installing nutplates- you can deburr hole (instead of countersinking) and the reduced head on the NAS 1097 will fit. 3 sizes of 3/32": NAS1097AD-3-3, NAS1097AD-3-3.5, NAS1097AD-3-4 3 sizes of 1/8": NAS1097AD-4-3.5, NAS1097AD-4.4, NAS1097AD-4.5 And also includes: Plastic divided storage box.

P/N 12-03781

ROUTER



This air-powered router is very light weight and features a straight handle and rear exhaust. Base is 1-1/2" and router guide is included. RPM: 20,000. Router shank: 1/4". Length: 6". Wt.: 1-1/2.12 Lbs. Made in U.S.A.

P/N 12-01321

ANGLE DRILL



Affordable Close-Quarter drilling tools with Steel alloy cylinder & rotor for long tool life. Also precision machined for smooth & quiet operation. Milled motor housing - rear exhaust.

Specifications: • 90° Angle - 1/4" Capacity, 1/4"-28 Thread - 0.3 hp (0.22 kW) • 3200 RPM • 90PSI (MAX) • Overall Length 8-1/4" (210 mm) • Weight 1.25 lbs. Made in USA P/N 12-00241

SMALL BODY RIGHT ANGLE DRILL



The ACAT 90 Degree Right Angle Drill is a high-precision, powerful, durable drill. 3200 RPM. Weight: 1.8 lbs. Length: 10 1/4". Accepts industry standard 1/4"- 28 threaded bits.

P/N 12-02859

AIR DRILL PISTOL - TYPE 4500 RPM



Ergonomically designed, compact, quiet, and powerful are just a few of the benefits available with this air drill. The short body length is ideal for working in tight areas while the light weight and perfect balance makes it the mechanics favorite drill.

• Includes chuck guard • 75 HP motor - High Torque Motor • Variable speed teasing trigger standard - adjustable trigger optional • Made in the USA • Capacity: 1/4" • Length: 6" • Weight: 2 lbs
P/N 12-00816

RIVET BUSTER



Rivet Buster for shearing all types of rivets. Shank: 0.401. Size includes 5/8". P/N 12-03779

HOLE DUPLICATORS (BUSHING TYPE)



Provide an accurate means of drilling duplicate matching holes in over-lapping sheets. Hole to be duplicated is drilled through bushing when pilot is in place. ea

Part No.	Pilot & Drill Size	Part No.	Pilot & Drill Size
AT532-61 #40	(.098")	AT532-63 #21	(.159")
AT532-62 #30	(.129")	AT532-65 #10	(.194")

MIN MAX PERFECT RIVET GAUGE SET



Experience a new era of accuracy in rivet measurement with the Min Max Perfect Rivet Gauge. This state-of-the-art tool is a significant upgrade from the standard rivet gauges that have dominated the industry for decades. By leveraging advanced 3D printing technology, we've crafted a gauge that not only matches but surpasses the expectations of professionals in metalworking, aviation, and beyond. Comes in a multicolored pair for AN3 and AN4 RivetsP/N 12-06311

RIVET SET BUMPER



Remove smiles from your build while ensuring you are lined up correctly. This will auto align a 1/8 inch 470-4 rivet head and protect the skin and rivet head from forming smiles. This will give you the show quality plane you are after.

Comes in a set of 10P/N 12-06308

SHEET METAL TOOLS



MARVEL AIR TOOL OIL

MARVEL brand oil - especially engineered for care of piston-type and rotary air tools. Prevents rust formation while providing lubrication for longer tool life and smoother operation. Keeps your air tools in top shape. A "must" for all air tools. 4 oz. bottle with spout.P/N 12-00872



MICRO-STOP COUNTERSINK CAGES & NYLON FOOT PIECE

2 Models available-one with NEEDLE bearing and one with BRONZE bushings. .001" increment depth adjustment. Positive adjustment lock. 1/4" dia. shank. 9/32" shaft travel. 9/16" cutter capacity. For 1/4-28 threaded cutters. Comes with "NO-MAR" foot piece. Rated at 3,000 RPM. Made in USA. With Bronze Bushings P/N 12-01412 With Needle Bearings P/N 12-00940



SQUEEZER SET MIX

6 piece set of the most commonly used squeezer sets shown above: 3/32" & 1/8" cup sets; 1/8" modified cup set; 1/8" & 1/4" flush sets; & 1/16" by 3/8" dia. flush set; plus #4510 organizer block. P/N 12-00882



90° ANGLE DRILL KIT

This angle drill kit includes a drill attachment with quality ball bearing construction for long life. Kit includes 12 threaded drills in assorted sizes and lengths, a mini 3-jaw chuck with 1/16" to 1/4" diameter capacity, and a molded storage case. Made in the U.S.A.

Drill Sizes: 1 ea. #2140 #40 stubby 1 ea. #2130 #30 stubby
2 ea. #3140 #40 short 2 ea. #3130 #30 short
1 ea. #3127 #27 short 1 ea. #3121 #21 short
1 ea. #3112 #12 short 1 ea. #3114 #1/4" short
1 ea. #4140 #40 long 1 ea. #4130 #30 long
1 ea. #20379 Mini 3-jaw chuck
P/N 12-00883



STOP COUNTERSINK CUTTERS - 100°

• Made in the U.S.A. • High Speed Steel • 1/4" -28 Threaded Shanks • 100° 3-Flute Precision Ground • For Use in Micro-Stop Countersink Units • 8 Sizes Available

Pilot Size	Decimal Equiv.	Body Dia.	Part No.	Price
#40 (3/32" rivet)	.0980"	3/8"	12-00879	.
#40 (3/32" rivet)	.0980"	1/2"	12-00942	.
#30 (1/8" rivet)	.1285"	3/8"	12-00880	.
#30 (1/8" rivet)	.1285"	1/2"	12-03331	.
#27 (#6 screw)	.1440"	1/2"	12-00943	.
#20 (#8 screw)	.1610"	1/2"	12-00881	.
#12 (#10 screw)	.1890"	1/2"	12-00944	.
5/32" (5/32" rivet)	.1560"	1/2"	12-00945	.
3/16" (3/16" rivet)	.1875"	1/2"	12-00946	.
1/4" (1/4" rivet)	.2500"	1/2"	12-00947	.



ECONOMY COUNTERSINK CUTTERS 100°

Economy High Speed Steel 3/8" and 1/2" dia in 8 different sizes • High Speed Steel • 1/4" -28 Threaded Shanks • 100° 3-Flute Precision Ground • For Use in Micro-Stop Countersink Units • 8 Sizes Available

Size	Decimal Equiv.	Body Dia.	Part No.	Price
#40 (3/32" rivet)	.0980"	3/8"	12-03249	.
#40 (3/32" rivet)	.0980"	1/2"	12-03250	.
#30 (1/8" rivet)	.1285"	3/8"	12-03251	.
#30 (1/8" rivet)	.1285"	1/2"	12-03252	.
#27 (#6 screw)	.1440"	3/8"	12-03253	.
#20 (#8 screw)	.1610"	3/8"	12-03255	.
#12 (#10 screw)	.1890"	3/8"	12-03257	.
5/32" (5/32" rivet)	.1560"	3/8"	12-03259	.
3/16" (3/16" rivet)	.1875"	3/8"	12-03261	.

360° SWIVEL HAND POP RIVET TOOL

Stanley brand professional hand pop rivet tool. Unique head design swivels 360° for riveting in any position, at any angle. Extended nose for hard to reach places. Built in handle latch. Die-Cast aluminum & hardened steel construction. Molded grips. Includes (4) interchangeable steel nose-pieces for: 3/32", 1/8", 5/32", & 3/16"

P/N 12-00889



DELUXE SPRING BACK TYPE DIMPLE DIE KIT WITH BLOCK

This deluxe spring back type dimple die kit has all the most commonly used dimple dies in one package. This kit includes:

1- 3/32 Dimple Die Set 1- #14870 Female Die / 3/8" Dia.
1- 1/8 Dimple Die Set 1- #14871 1/8" Female Die / 3/8" Dia.
1- #6 Screw Dimple Die Set 1- #8 Screw Dimple Die Set
1- #4520 Organizer Block for Dies

P/N 12-00868



DOUBLE OFFSET RIVET SET

Double offset rivet set for universal AN470 rivets, 5-1/2" long sets. Used for hard to reach rivets in corners. High alloy steel and heat treated. Shanks are precision ground. Cuppings are polished.

3/32" Double Offset Rivet SetP/N 12-00936
1/8" Dbl. Offset Rivet SetP/N 12-00873
5/32" Double Offset Rivet SetP/N 12-00937
3/16" Double Offset Rivet SetP/N 12-00938
4-PC Double Offset Rivet SetP/N 12-00939



AVERY CUTTING & POLISHING WHEEL KIT

Cutting polishing wheels are a uniform blend of minerals and resins molded into wheel form with rugged, dense construction that provides aggressive polishing and blending action without removing excess base materials. These wheels generate uniform finishes and can remove minor surface imperfections. Use these wheels with a die grinder for deburring holes and edges. Small wheels are more versatile than large (6") wheels. Can be used on handheld parts or parts in the jig. These wheels are the same density, grade, and mineral type as the 7A MED 6" wheel.

Kit Contents: (1) #936 Mandrel + (2) 1" x 1" x 3/16" Wheels (1) #932 Mandrel + (2) 2" x 3/4" x 1/4" WheelsP/N 12-00876
1" x 1" x 3/16" Hole WheelP/N 12-01997
Mandrel for 3700P/N 12-01996
Mandrel for 3719P/N 12-01998

3M™ SCOTCH-BRITE™ DEBURRING WHEEL



Two Styles Available: Cut & Polish/Unitized Wheel-7A Medium grade (harder) Use to radius and deburr edges of aluminum parts. These wheels give a uniform brushed satin finish to parts and deburr quicker and easier than hand finishing. These wheels are discs of Scotch-Brite web compressed and bonded to form a rugged, dense wheel. Wheel size: 6" dia. x 1" wide x

1/2" thru hole.P/N 12-00875

Light Deburring Wheel-7S Fine Grade (Softer)

Light deburring 7S Fin 6 x 1 x 1. This wheel has a 1" thru hole. To fit 1/2" order P/N 12-01585.....P/N 12-00948

3M Flange Adapter 45035 1" to 1/2"P/N 12-01585

3M Flange Adapter 45034 1" to 5/8"P/N 12-05134



DRIVE PIN PUNCHES

Drive Pin Punch 1/16"P/N 12-00949

Drive Pin Punch 3/32"P/N 12-00870

Drive Pin Punch 1/8"P/N 12-00871



4-PIECE DRILL STOP SET

Use when drilling in sheet metal to help eliminate drill breakage & surface marks. Safely keeps drill from going too far through the work. Drill stops have a coiled spring to cushion the drill breakthrough & prevents the drill chuck from marring the work surface. Color coded for easy identification.

P/N 12-00867

TO

SHEET METAL TOOLS

POLYETHYLENE DIMPLING Mallet



This custom made UHMW polyethylene plastic mallet is great for dimpling skins. Blows are more solid and much quieter than with steel hammers. Will outlast wood mallets. Hammer head measures 2.5" round x 4" long with 12" handle. Wt: 16 oz P/N 12-00605

PLASTIC FORMING Mallet



This custom made UHMW polyethylene plastic forming mallet is great for metal forming. Smooth radiused surfaces will not mar surface. Long life, split resistant. Mallet head measures 2.5" round X 5" long w/ 11" handle; Wt: 14 oz. Great combo to the shot bag. P/N 12-00607

METAL FORMING SHOT BAG



For those builders that want to try their hand at metal forming this leather shot bag is a must have item. Leather shot bag made from 3/4 oz. top grain cowhide. The bag is double stitched and fills through a 1" opening sealed with Velcro. The bag is 12" round and 1-1/2" thick. Use lead shot #8 - #7.5; or sand - mortar quality type (shot can be purchased at local sporting goods or gun stores). P/N 12-00606

HAND SEAMER/3.5" JAW



Has VISE GRIP locking feature to aid clamping & holding work. Use for straightening and bending rib and bulkhead flanges. Made with 7" vise grip plier. Jaws are made from 3/16" X 1" X 3-1/2" stainless steel with machined radius. TIG welded & polished. P/N 12-00608

FLUTING PLIER



Make narrow & precise flutes for straightening ribs and bulkheads easier & better than pliers with molded jaws. Made with 7" VISE GRIP pliers. Pins are 3/16" dia. stainless steel. TIG welded & polished.....P/N 12-00609

VISE GRIP DIMPLERS



Made for dimpling in restricted and hard to reach places where regular dimple dies won't fit. Made with 7" VISE GRIP plier. Machined tool steel dimple dies are T.I.G. welded to the VISE GRIP jaws then polished. 2 sizes available (3/32" and 1/8"). 3/32"P/N 12-00611 1/8"P/N 12-00612

LEVER SNIPS



Offset cutting tool, leaves 2 clean, finished edges. 8.5" length, .75 lb. Model TP134 - (Left hand snip, cuts left & straight) P/N 12-00367

3 INCH CUT OFF WHEELS



3" x .03" x 1/4" Cut-Off Wheels by Black Hawk Abrasives are thin but strong die grinder cutting discs built for fast slicing even on hard materials. Also, sometimes called whiz wheels, these 3-inch cutting wheels are made with reinforced fiberglass mesh and a heat-treated aluminum oxide grain bonding matrix for additional safety, lateral stability, and increased longevity. These cutoff discs have a 3-inch diameter making them perfect for cutting in hard to reach places. Additionally, the .03 inch thickness (1/32 inch thickness) allows for rapid cuts with minimal workpiece material loss. The Black Hawk 3-inch metal cut-off wheel can be used on stainless steel or steel and is ideal for applications such as flash removal, cutting pipes, cutting rods or removing gates to name a few.

3 x 1/32 x 1/4 InchesP/N 09-05685
3 x 1/16 x 3/8 InchesP/N 09-01523
3 x 1/32 x 3/8 Inches.....P/N 09-01521

ADJUSTABLE SET HOLDER FOR PNEUMATIC SQUEEZERS



New improved design. Heat treated 4130 steel investment casting with rolled threads. This special set holder is made to replace the rigid (2-9/16") set holder standard to most CP214 style pneumatic squeezers. This adjustable set holder will eliminate the need to shim the dies and sets with shim washers. Adjustments are faster & easier.....P/N 12-00615
Note: Only for yokes with 1" thick base or less. Will not work in tandem units.

POP GRIP DIMPLERS AN-426 RIVETS



For dimpling in hard to reach places. Works with any hand pop rivet tool. Can be used over & over. Works for both 100 & 120 pop rivets. Extra nails included (Uses standard hardware store nails). 2 sizes available. 3/32"P/N 12-00613 1/8"P/N 12-00614
Note: The pop rivet dimplers show above are made with 100° angles, same as regular dimple dies. They will work with either solid flush rivets (AN-426 - 100°) or with pull type rivets such as a AVEX rivets (120°), etc. The dimple formed with these pop rivet dies will not be as 'sharp' as dimples formed with regular dimple dies. This is because you get more pressure with a squeezer or a hammer than with a pop rivet puller; however, the dimples formed with pop rivet dimplers are adequate for occasional use in tight or hard-to-use places.

FLUSH SWIVEL RIVET SET



U.S. MADE -- ATI Brand. New design flush rivet set with swivel action eliminates problem of rivet gun alignment with the work surface + rubber guard to reduce slippage while flush riveting. .401" shank X 1-1/4" dia. polished face. Built-in retaining spring. P/N 12-00741

BACK RIVETING PLATE



Back riveting requires a hard flat surface to act as a bucking bar while you set the shop head of the rivet. Our plate is a perfect hard & flat surface for "Back Riveting". 3/8" thick X 4" wide X 15" long. Low carbon steel plate with flat ground surface. Weight 10 lbs.P/N 12-00618

HOLE FLANGING TOOL



For forming flanges around lightening holes. Made from 2024 aluminum and hard black anodized. Ball bearing style rollers. Comes with spare set of rollers. P/N 12-00619

SPARE ROLLER-SET OF 2



Replacement rollers for our edge rolling & hole flanging tools (above). P/N 12-00621

WISS COMPOUND ACTION SNIPS



12-01155



12-01190



12-01189

Famous for cutting ease, keeping their edge and making clean, sharp cuts. Hardened molybdenum steel blades, serrated jaws and vinyl comfort grips. Capacity 18 gauge (.049") steel. Length 9-3/4". Wt. 14 oz.
P/N 12-01155 - Cuts left, from tight curves to straight.....
P/N 12-01189 - Cuts right, from tight curves to straight.....
P/N 12-01190 - Cuts straight (or wide curves left or right in light stock).

IRWIN OFFSET SNIPS



Irwin offset snips handle virtually every cutting job in sheet metal - linoleum, carpet, tile and other materials. They are easier to use than conventional metal snips, and cut in 3 directions. Irwin snips feature forged steel blades, a unique curved handle for comfortable fit in the hand, and an exclusive pinch-point wire cutter. They cut in three directions—straight, sharp angles in one direction, and 5" diameter circles in the opposite direction. Irwin offset snips make difficult cuts easy - they can make tight circular cuts, cut easily through corrugated metal, and cut solid and stranded wire. Available in right or left cutting models.
IRWIN (Right Cutting).....P/N 12-00187
IRWIN (Left Cutting).....P/N 12-00186

SHEET METAL TOOLS

SPEED DEBURRING & C'SINKING TOOL



Swivel action - makes deburr & c'sink holes fast & easy. Molded handle with 2" long plated steel "Dog-leg" shaft with 1/4"-28 threaded holder. Includes (1) 3/8" X 100° 3-flute burring cutter (part #1050) + 8" extension shaft for deburring the inside of

flanges & other hard to reach holes.....P/N 12-00622.....

Handle and Extension Shaft sold separately

Swivel handle only.....P/N 12-00623.....

Extension Shaft only.....P/N 12-00624.....

E-Z BURR - HSS SERIES



E-Z Burr High Speed Steel (HSS) tools are the industry standard for quick, effective and consistent front and rear burr removal. No other HSS deburring tool is this durable. By designing the blade to operate independent from springs and plungers, E-Z Burr has created a deburring tool with a flexible blade and a solid shank for optimum performance for deburring metal or plastic components. In addition, the patented E-Z Burr HSS deburring tool allows you to change chamfer settings, from extreme low to extreme high, and cutting blades without removing it from the holder. Once the desired

chamfer is set, it won't change, even from blade to blade. The result is less downtime, more production, and higher profits.

E-Z Burr Tool Specifications:

Series L1A and L1B tools have a working range of -0.0 + .006 inches and -.03 + .15mm.

Series L2A and L2B tools have a working range of -0.0 + .016 inches and -.10 + .40mm.

Series L3A and L3B tools have a working range of -0.004 + .015 inches and -.10 + .40mm.

Note: All tools (front and rear cutting blade with positive rake)

**** METRIC SIZES NOT LISTED, MAY BE AVAILABLE UPON REQUEST AS SPECIAL ORDER ONLY - CALL FOR QUOTE ON SIZES NOT LISTED: 1-877-477-7823 ****

Hole Dia.	Shank Dia.	Blade Series	Part No.	Price
3/32 in. / 2.38mm	.236 in. / 6.00mm	L1A	12-02949	.
1/8 in. / 3.17mm	.236 in. / 6.00mm	L1B	12-02951	.
5/32 in. / 3.96mm	.250 in. / 6.35mm	L2A	12-02952	.
3/16 in. / 4.76mm	.250 in. / 6.35mm	L2B	12-02953	.
1/4 in. / 6.35mm	.359 in. / 9.10mm	L3A	12-02955	.
2.50mm	6.00mm	L1A	12-02959	.
3.00mm	6.00mm	L1A	12-02960	.
4.00mm	6.00mm	L2A	12-02961	.

EZ-BURR RIVET HOLE BUNDLE



The Rivet Hole Deburring Tool bundle by E-Z Burr includes 5 high performance HSS deburring tools for front and rear cutting. Sizes: 1/8, 5/32, 3/16, 7/32, & 1/4.

P/N 12-02956.....

HSS THREE FLUTE BURRING CUTTER - 100°



US made. High speed steel, precision ground, three flute burring cutter. 3/8" diameter X 100° with 1/4-28 threaded shank. Same style as a countersink but without the pilot.

P/N 12-00625.....

STRAP WRENCH



Heavy malleable iron body with latex-treated nylon webbing. For gripping and turning of round, hex or square parts without marring the surface. Indispensable tool for use in close quarters where ordinary pliers cannot be used. Tool is 11-1/2" long with 18" strap. Capacity 3". Wt. 1-1/2 lbs.P/N 3004.....

DOUBLE EDGE DEBURRING TOOL




Used to quickly deburr edges of sheets up to 1/8" thick. Save time and motion deburring edges of parts. Precision ground Carbide "V" shape blade with hex aluminum handle. Non-removable cutter styleP/N 12-00629.....

EDGE MARKER BLOCK



This handy device holds a marking pen and has an adjustable stop for running along the edge of a part. The adjustable stop allows variable edge distance for rivet layout, etc. One thumbscrew holds the pen (pen sold separately) and the other thumbscrew holds the adjustable stop. Made from delrin (plastic) material. Comes ready to use with (1) Pilot marking pen.....P/N 12-00630.....

SHOP HEAD RIVET GAUGE SET



Set of four gauges for -3, -4, -5, & -6 rivets. Each gauge measures MINIMUM height and MINIMUM diameter of shop heads AFTER setting. Eliminates guessing if your rivets are properly set. Works for measuring both universal head and flush rivets. Precision machined to size from 2024 aluminum. Rivet size permanently stamped on each gauge. Color coded anodized finish. Instructions included.....P/N 12-00631.....

EDGE ROLLING TOOL



For pre-bending skin edges on lap joints and butt joints before riveting. "Edge rolling" will prevent skin edges from curling up during riveting. Machined round body made from 2024 aluminum. Hard black anodized finish for wear resistance. Ball bearing style nylon rollers (non marking); + spare set of rollers and instructions included.....P/N 12-00632.....

RIVET LENGTH GAUGE



One gauge measures -3, -4, -5, & -6 rivets. Used to check for proper length of rivets BEFORE setting. Eliminates measuring and guessing of rivet lengths. Works for both universal head and flush rivets. Precision machined to size from 2024 aluminum. Rivet sizes permanently stamped. Gold anodized finish. Instructions included.

P/N 12-00633.....

TEMPORARY ASSEMBLY PINS



Initial fitting of control surfaces require multiple installation and removals of the parts to fit, trim, and adjust everything. These temporary assembly pins make the task quicker and easier. Pins are 3/16" diameter with tapered points and angle bends for easy installation. The pins are threaded

so the pin holder can be removed — this is necessary to prevent damage should you move the control surface too far during fitting. To remove pins just screw holder back on pin and remove pin. Packaged in sets: 6 pins / 2 holders.....P/N 12-00627.....

INSTRUMENT HOLE PUNCH ATS-123C



Reversible cutter for both 2-1/4" and 3-1/8" instrument panel holes. Easy to use even with instrument panel installed in aircraft. Allows for close work with other instruments already installed. 4 lbs (2Kg) shipping weight.

P/N 12-02743.....

BOLT GRIP



This new tool lightly grips the heads of bolts and screws for easier insertion into tight or blind spots. No more dropped or lost parts. Tool has one end for -3 (3/16") fasteners and one for -4 (1/4") fasteners. 12" overall length.

P/N 12-00628.....

CHUCKING REAMERS



We stock straight shank and straight flute Chucking Reamers in a wide range of sizes.

SEE WWW.AIRCRAFTSPRUCE.COM FOR A COMPLETE LISTING OF OUR CHUCKING REAMERS.

BRASS PLUMB BOB



Precision machined brass with clear lacquer finish and hardened replaceable tip. Top unscrews for centered string installation.

Model: 6C235 • **Size :** 8 oz, 4 7/8" L • **Finish:** Clear Lacquer • **Characteristics :** Replaceable Tip, Screw Top To Attach String (String Not Included).....P/N 12-01711.....

TO

MITTLER BROTHERS SHEET METAL TOOLS

MANUAL BENCH PRESS



Economical & versatile. Bench press accepts tooling for punching round, square & oblong holes; punching louvers; creating radius corners; & shrinking or stretching metal. Punch/flare tooling & instrument hole punches. Easily mounted with included adapters. Can also Be used as arbor press.
Model 2200-M P/N 12-02770

LOUVER PUNCHES LOUVER PUNCH START UP KITS WITH MOUNTING HARDWARE



Size	Part No.	Price
1"	12-02771	.
2"	12-02772	.
3"	12-02773	.
4"	12-02774	.
5"	12-02775	.
3" Dome	12-02776	.
4" Dome	12-02777	.

ULTIMATE BOX & PAN BRAKE



Features include wrenchless upper set back adjustments, 3-1/2" depth of box, 2" down leg, 1" front to rear adjustment and 1/4" reverse bend capabilities. A complete set of upper radius fingers. • Wrenchless upper set back adjustments • 3-1/2 inch depth of box • 2 inch down leg • 1 inch front to rear adjustment • 1/4 inch reverse bend capabilities. Along with the box and pan brake, you will receive a complete set of upper radius fingers (your choice), bed fingers, apron angle fingers, and counterweight(s). The total width of the upper radius finger kit will be 48". You will receive the following fingers: qty 7 of 6" and one each of 3", 2", and 1" fingers totalling to 48".
Model 2800-48-16 P/N 12-02799

Upper Radius Finger Kits (radius is measured inside of bend)

WHEELING MACHINE (U-WELD MODEL)



This English Wheel U-Weld Kit supplies the components to make your own English wheel, minus the steel tubing. A detailed assembly booklet is provided and the complete kit includes all the key components of the turn-key MetalAce 44F English Wheel. Other kits on the market come with smaller 2" wide x 2 1/2" diameter anvil

wheels, smaller diameter upper wheels, and require more assembly. The screwlift quick release cam unit is fully assembled. Components proudly made in the USA.

MA44F-KIT - Components and bill of materials to build a 44F English Wheel
P/N 12-00570

MA44F - Fully assembled English Wheeling Machine
P/N 12-02294

BENCH TOP ENGLISH WHEEL



A Rugged, Robust Machine for the occasional metalworking project to the professional craftsmen. All wheels (anvil & top) are heat treated, hard turned & ground for accurate precision metal forming. • 26-1/2" Deep Throat • 2-1/2" OD - 2" Wide Anvils • 7" OD - 2" Wide Top Wheel • Cam Action Release on Top wheel For Easy Anvil Change • Adjustable Anvil Wheel Angle • 3" x 4" x 1/4" Tube Construction For Minimum Deflection • Kick Wheel Manual Pressure Adjustment • Anvil

Wheels In Radius Of 2-3/8", 3-1/4", 5", 8-1/2", 12" & Flat
Model 2900 P/N 12-02812

24 INCH BOX & PAN BRAKE WITH RADIUS FINGERS



The ULTIMATE Box & Pan Brake has a unique "3 Finger" design. This design incorporates moveable fingers on the bed and apron as well as the usual upper fingers. This design allows the operator to make bend combinations that were extremely difficult if not impossible before. The ULTIMATE Box & Pan Brake has wrenchless upper set back adjustments and is designed to bend 16 gauge mild steel the full width with the included apron angle fingers. A complete set of upper fingers, bed fingers, apron angle fingers, and counterweight are standard equipment..... P/N 12-06476



24" MANUAL BEAD ROLLER

Bead Rolls Sets Sold Separately. Max Capacity: 19 Ga(.040") Mild Steel. 16 Ga(.050") Aluminum. 21 Ga(.035") Stainless Model 210-24M
P/N 12-02746

SEE WWW.AIRCRAFTSPRUCE.COM
FOR ROUND ROLL AND STEP ROLL PART NUMBERS.



UPPER RADIUS FINGER KITS

Mittler Bros. upper radius finger kits (radius measured inside of bend). **Note:** 48" kits come with qty 7 of 6" and one each of 3", 2", and 1" fingers.

1/8 Inch P/N 12-02804

3/16 Inch P/N 12-02806

1/4 Inch P/N 12-02808

5/16 Inch P/N 12-02811

AIRCRAFT PUNCH & FLARES 1" - 6" OD



Just drill a pilot hole for the 1/2" draw bolt, apply the tool and tighten the bolt for a smooth, flared hole in one easy step. Punch hole only by removing female flare ring and use punch and die. Easily mounts in our Bench Presses.

OD	Part No.	Price	OD	Part No.	Price
1"	12-02778	.	3-1/4"	12-02788	.
1-1/4"	12-02779	.	3-1/2"	12-02789	.
1-1/2"	12-02780	.	3-3/4"	12-02790	.
1-3/4"	12-02781	.	4"	12-02791	.
2"	12-02782	.	5"	12-02792	.
2-1/4"	12-02783	.	6"	12-02793	.
2-1/2"	12-02784	.	7 piece set 1"-3" (w/o 2-1/4" & 2-3/4")	12-02794	.
2-3/4"	12-02785	.	9pc Set 1"- 3"	12-02796	.
3"	12-02786	.	13pc Set 1"- 4"	12-02795	.
3-1/8"	12-02787	.			

INSTRUMENT HOLE PUNCH



OD	Part Number	Price
2-1/4"	12-02797	.
3-1/8"	12-02798	.

WHEELING MACHINE (BENCH MODEL)



Clearly, this is the most popular of in-home English Wheels. Metal Ace offers extensive anvil configurations to meet your needs. Plus, with the new gusseted frame, it's the strongest benchtop wheel on the market. Trick out your custom-built bike or complete hobby projects without breaking the bank. These English wheeling machines provide outstanding performance

on small jobs like motorcycle tanks, tank covers, seat cowls and aircraft fillets. Versatile use - mount on bench, clamp in vise or use with optional welded stand. Proudly made in the USA. **Features:** • Thickness capacity for steel is 18 gage; 16 gauge with optional stiffener brace. • Features can be rolled into the center of a 44" panel. • Can be mounted to a bench, clamped in a vice or used with the optional welded floor stand. • Optional wheels and stand sold separately. • Anvil yoke is adjustable on both sides of the axle support with thumb screws so the anvil wheel can be trued with the upper wheel. **Specifications:** • 3.25" radius lower anvil • 8" upper wheel • 22" throat depth • Reinforced frame • 18 gauge mild steel capacity .080 AL capacity • Made in the USA.

Wheeling Machine MA 22B P/N 12-00571

ACCESSORIES

Radius Wheel 5" 22B-5.00 P/N 12-02026

Radius Wheel 5" 22B-5.00 Narrow P/N 12-02027

Radius Narrow Offset Wheel 5" 22B-5.00NO. P/N 12-02028

Optional Stand for the 22B Wheeling Machine MA22B-STAND
P/N 12-00575

PLANISHING HAMMER



Speed up fabrication time on complex multi form aluminum and steel panels for making those impossible to find replacement parts. • 4600 Hits Per Minute @ 90 PSI • Rear Adjuster Sets Load Force & simplifies Anvil Changes • Foot Pedal Control for Hands Free Operation
• 9 Radius Anvil Heads Included: 3/4", 1-1/2", 2", 3", 4", 6", 8", 12" & Flat • 12" 24" Model 2700-24 P/N 12-02814

SEE WWW.AIRCRAFTSPRUCE.COM FOR A COMPLETE SELECTION OF MITTLER BROTHERS TOOLS.

MILTON TOOLS



MILTON 1/4" FNPT FEMALE M-STYLE KWIK-CHANGE® COUPLER

Milton 1/4" FNPT Female M-Style KWIK-CHANGE® Coupler. Milton Industries is proud to be the creator and leader of the pneumatic industry standard M-Style coupler. This 1/4" FNPT M style brass coupler has a 1/4" basic flow size, offering a maximum of 300 PSI. Comes with Buna-N seal and air flow of 40 SCFM.....P/N 12-05332.....

MILTON DUAL HEAD CHUCK DIAL TIRE GAUGE 0-160 PSI

Milton (S-936) High Pressure Dial Tire Pressure Gauge - Dual Head Air Chuck and 12" Hose.

No need to worry about batteries with this durable dual head chuck dial tire gauge with a working pressure range of 0-160 PSI has dial-type gauge with internal diaphragm construction for greater durability. Includes a 12" hose and 45 degree chuck head with deflator valve. Comes with a protective rubber boot for added durability.....P/N 12-05342.....



MILTON TIRE VALVE EXTENSION

Replacement Extension Core.

Features: • Replacement Part • Valve core extension • For Milton high pressure gages.....P/N 12-05381.....



MILTON INFLATOR GAGE DUAL HEAD CHUCK - 15" HOSE



Milton Original Dual Head Chuck Tire Inflator Gauge - 15" Hose. Milton Industries specializes in tire inflator gauges and this original S-506 dual chuck inflator gauge was the first gauge of its kind ever built in the industry. Gauge and valve cartridges are both replaceable.

This essential pneumatic tool is ideal for any vehicle trunk, home garage, or automotive shop. Dual head chuck inflator gauge is made of heavy duty construction which provides for long life, even under extreme use and conditions. Equipped with magnifying lens for full view of scale. 1/4" NPT air inlet.....P/N 12-05331.....



MILTON TIRE VALVE ADAPTER

Government - Tire Valve Adaptor.

Features: Extension assembly with clip ring and chain. P/N 12-05380.....

MILTON LOW PRESSURE TIRE GAGE 2-20 PSI

Low pressure tire gauge for 2-20 PSI provides accurate, long life with trouble free performance. Made of a durable plated brass with 4 side nylon indicator bar. Always check tire pressure when tires are cold. P/N 12-05322.....



MILTON COMPRESSOR ACCESSORY KIT



Milton (S-220) Air Compressor Accessory Starter Kit, (16-Piece) This inclusive variety of pneumatic compressor accessories make the perfect start kit for a new compressor or just updating a current compressor. Includes 16 popular Milton items to fit versatile needs and projects (such as: inflating/checking tire pressure, inflating sports equipment, blowing debris, mending/connecting hoses, connecting air tools quickly, etc.). Ideal for DIY projects, repair shop, mobile repair and maintenance.....P/N 12-05323.....



MILTON MALE HEX 1/4 NPT X 1/4 NPS

1/4" MNPT hex nipples are brass hose fittings that are used to assemble new hoses or replace old fittings on hoses. 1/4" Male NPT x 1/4" NPS ball socket. P/N 12-05328.....



MILTON 0-400 PSI DUAL HEAD CHUCK STEM PRESSURE ASSEMBLY

This dual chuck stem pressure gauge assembly kit includes a flexible hose whip and metal carrying case. Pressure range of 0 - 400 PSI.....P/N 12-05376.....

MILTON GAUGE 1/4 NPT 0-160 PSI - BOTTOM MOUNT



Use this pressure gauge for reliable service with compressors, regulators, air lines, pneumatic tools and equipment. Made up of a brass mechanism, ABS case and a polycarbonate lens, this gauge is resistant to heat, corrosion, water, salt water and oil. Can also be used in steam applications if less than 120 degrees Fahrenheit. The 1/4" NPT pressure gauge has a bottom mount and offers a pressure range of 0 to 160 PSI. 2" face diameter... P/N 12-05336.....

MILTON GOVERNMENT - HIGH PRESSURE SAFETY INFLATOR



Government - High Pressure Safety Inflator.

Features: 0-600 psi • Adjustable pop-off valve • 10 ft. hose assembly for safe distance operation • NSN #: 6685-00-124-4336 • Milton CAGE #: 94894 • Complies with MIL-I-85352 (Part No. M85352/1)

P/N 12-05371.....

MILTON DIAL TIRE GAGE 0-60 PSI



45 degree dial type tire gauge has an internal diaphragm construction for greater durability. 45 degree chuck head comes with deflator valve and durable rubber boot.

0-60 PSI.....P/N 12-05329.....

0-160 PSI.....P/N 12-05330.....

MILTON 1/4 INCHES MNPT M-STYLE PLUG



1/4" M style MNPT plugs are the industry standard style plugs. These steel plugs have a 1/4" basic flow size, maximum air flow of 40 SCFM and a maximum inlet pressure of 300 PSI. P/N 12-05334.....

MILTON SCREW-ON AIR CHUCK

Screw-On Air Chuck.....P/N 12-05363.....

MILTON 4 BLOW GUN DELUXE TIP KIT



Milton S-194KIT KWIK-CHANGE® PRO Series Safety Tip Blow Gun Kit - 235 Max PSI, (4-Piece) Tackle multiple pneumatic projects confidently with Milton's inclusive 4-piece S-194KIT PRO Series Safety Tip Blow Gun Kit, which includes an OSHA-compliant Safety Tip Nozzle and KWIK-CHANGE® Universal Tip System. The 5" angled stainless steel safety nozzle is designed with a side safety vent, avoiding accidental damage or forced air in the event of the blow gun tip being obstructed. The slim nozzle is also ideal for reaching into tight or narrow spaces. The pistol grip type body of this blow gun offers a dual material, contoured grip for comfort and variable airflow trigger. Offers a pressure range of 50 to 235 PSI and 15.18 SCFM. P/N 12-05320.....

MILTON ADJUSTABLE M STYLE POCKET BLOW GUN



M style adjustable pocket blow guns offer an easy grip, two finger control to adjust from full volume air flow to complete shut off. Knurled grip for secure handling even with oily or greasy fingers. Fits M style couplers, or any 1/4" body industrial style couplers. Maximum pressure of 150 PSI or 15.9 SCFM at 100 PSI. P/N 12-05321.....

MILTON MNPT ID HOSE END FITTINGS



Features: • Assemble new hoses or replace old fittings • Secure with a crimped ferrule for best results

1/4" MNPT 1/4" ID hose end fitting ...P/N 12-05324.....

1/4" MNPT 3/8" ID hose end fitting ...P/N 12-05325.....

MILTON 1/4 FNPT SAFETY COUPLER - M-STYLE



Milton S-99705 - 1/4" FNPT M style safety couplers are easy to use. Simply push once to stop airflow, twice to release plug. Safety couplers prevent possible injury or damage due to accidental disconnects. OSHA required in certain areas and applications. M style couplers have a 1/4" basic flow size and offer air flow of up to 36 SCFM. Maximum pressure of 300 PSI. Red button color for easy identification.....P/N 12-05326.....



MILTON STANDARD BORE AIR CHUCK

The Milton Standard Bore Air Chuck - Open is a specially designed air chuck that locks onto the cap threads of a Standard Bore valve stem when the sliding sleeve is pushed to the forward position. The chuck releases when the sleeve is pulled back. Available for use with tire changers and auto tire inflators.....P/N 12-05352.....

SEE OUR COMPLETE SELECTION OF MILTON TOOLS ON OUR WEBSITE.

MILTON TOOLS – SCREW EXTRACTORS – PLANERS

MILTON 1/4" MNPT MALE M-STYLE KWIK-CHANGE® COUPLER



Milton Industries is proud to be the creator and leader of the pneumatic industry standard M-Style coupler. This 1/4" MNPT M style brass coupler has a 1/4" basic flow size, offering a maximum of 300 PSI. Comes with Buna-N seal and air flow of 40 SCFM. Both the body and sleeve are made of brass.

P/N 12-05333

MILTON 1/4 INCH FNPT M-STYLE PLUG



1/4" FNPT M style plugs have a 1/4" basic flow size and air flow of 40 SCFM. Made of case hardened steel and plated to resist rust, M style plugs have a maximum pressure of 300 PSI. P/N 12-05335

MILTON 1/4 NPT FILTER WITH POLYCARBONATE BOWL



This (EX25F40A-02P) 1/4" NPT Air Filter features a polycarbonate bowl with a capacity of 7.4 oz. Bowl can be automatically drained under pressure, or manually by rotating drain valve at bottom of filter with a push-to-connect drain tubing connection that channels water safely away. Max Air Flow of 140 CFM combined with a max operating pressure of 145 PSI. Always install filter 20' feet down line of air compressor to allow air to cool and lessen the amount of water carried through the supply line. FRL components feature directional arrows to indicate the flow of air. P/N 12-05338

MILTON 1/4 NPT LUBRICATOR 5 OZ POLYCARBONATE BOWL



This 1/4" NPT Air Lubricator features a Polycarbonate bowl with a capacity of 4.56 oz. FRL Lubricator delivers a consistent mist of oil through the airline and extends tool life. Oil amount is easily adjusted by rotating dial at the top of the unit. FRL Lubricator can be refilled either by removing bowl or filling through oil fill cap on top. Max Air Flow of 175 CFM and a max operating pressure 145 PSI. P/N 12-05340

MILTON SLIP SLEEVE FOR GAGING ELEMENT



Government - Slip-Sleeve Constant Bleed Detachable Fitting.

Milton Slip Sleeve For Gaging Element P/N 12-05385
Slip Sleeve-Detachable Fitting P/N 12-05386

ORDER ONLINE!

www.aircraftspruce.com

- 100,000 Parts!
- 24 Hour Access!
- Fast, Easy Navigation!

EASY OUT SCREW EXTRACTORS



Black Max spiral screw extractor grips screw firmly with its tapered, left-handed spiral flutes. Intended to remove screw manually with T-handle tap wrench or equivalent. Features: • Black oxide coating for maximum corrosion protection and cutting performance • Black oxide coating combined with a tough carbon tool steel construction ensures longer life • Extractor size is permanently etched on the tool for quick and easy reference. Specifications • To remove Bolts/Screws: 3/32" to 5/32" • Use Drill Bit Size: 5/64" • Shank Diameter: 1/8" • Point Diameter: 0.060"

Description	Part No.	Price
3/32" to 5/32"	12-02873	.
5/32" to 7/32"	12-02874	.
7/32" to 9/32"	12-02875	.
9/32" To 3/8" and 1/8" Pipe	12-02876	.
3/8" To 5/8" and 1/4" Pipe	12-02877	.
5 Piece Set	12-02882	.

RYOBI PLANER



The Ryobi cordless Hand Planer has the power of a corded hand planer when powers through the toughest jobs. The rear mounted "kickstand" keeps blades from contacting surfaces when the unit is placed shoe down between operations. The pommel front handle and rear handle designed with overmold for added comfort. Dust ejection adjusts for left or right exhaust. All these great features are a part of the Ryobi ONE+™ system which has have 40 tools and batteries. Depth adjustment knob adjusts from 0-1/64". Dual carbide blades for smooth, accurate planning. Rear mounted "kickstand" keeps blades from contacting a surface when the planer is set down between operations. Extended front for balance and accuracy. MFG Brand Name : Ryobi. MFG Model # : P610. MFG Part # : P610

18 V Planer P/N 12-02824
BI P100 ONE+ Nickel-Cadmium 18-V Rechargeable Battery
P/N 12-02825
P131 ONE+ 18-V IN-Vehicle Charger P/N 12-02826

RYOBI PLANER KIT



Kit includes:

(1) 18 Volt Planer - The Ryobi cordless Hand Planer has the power of a corded hand planer when powers through the toughest jobs. The rear mounted "kickstand" keeps blades from contacting surfaces when the unit is placed shoe down between operations. The pommel front handle and rear handle designed with overmold for added comfort. Dust ejection adjusts for left or right exhaust. All these great features are a part of the Ryobi ONE+™ system which has have 40 tools and batteries.
(1) P100 ONE+ Nickel-Cadmium 18-Volt Rechargeable Battery - The Ryobi ONE+ Nickel-Cadmium 18-Volt Rechargeable Battery provides extended run-time and works with all present and past Ryobi 18-volt ONE+ tools and chargers.
(1) P131 ONE+ 18-Volt In-Vehicle Charger - The Ryobi ONE+ 18-Volt In-Vehicle Charger is compatible with all past and present Ryobi 18-volt ONE+ NiCd and lithium-ion batteries. It plugs conveniently into a vehicle's 12-volt DC outlet and takes less than an hour to charge the batteries fully. P/N 12-02827



MILTON COUPLER WASHERS

Milton Washer 768 for an M & T Style coupler. Comes in a pack of 10. P/N 12-05432

SEE OUR COMPLETE SELECTION OF MILTON TOOLS ON OUR WEBSITE.

MICROMETERS

ELECTRONIC MICROMETER

Quick, accurate, easy-to-use and coolant, water and oil resistant to IP54 standards, Fowler's Electronic IP54 Outside Micrometers offer the same features as Fowler's standard electronic micrometers, but are robust enough to perform in situations where regular electronic micrometers failP/N 12-03414

ELECTRONIC MICROMETERS



P/N 12-03410

P/N 12-03411

P/N 12-03412

Quick, accurate, easy-to-use and coolant, water and oil resistant to IP54 standards, Fowler's Electronic IP54 Outside Micrometers offer the same features as Fowler's standard electronic micrometers, but are robust enough to perform in situations where regular electronic micrometers fail.

Description	Part No.	Price
2-3" Ip54 54-860-003-1	12-03410	.
3-4" Ip54 54-860-004-1	12-03411	.
1-2" Water Resistant 54-860-002-0	12-03412	.

ELECTRONIC OUTSIDE MICROMETER SET



Quick, accurate, easy-to-use and coolant, water and oil resistant to IP54 standards, Fowler's Electronic IP54 Outside Micro-meters offer the same features as Fowler's standard electronic micrometers, but are robust enough to perform in situations where regular electronic micrometers fail. P/N 12-03413



MARK VI ELECTRONIC INDICATOR
0-1"/25mm Mark VI Electronic Indicator.
P/N 12-03420

MARK VI ANALOG ELECTRONIC INDICATOR
0-.500"/12.5mm Mark VI Electronic Indicator with Analog Display.....P/N 12-03424

MARK VI ELECTRONIC MICROMETER
0-.500"/12.5mm Mark VI Electronic Indicator, 8mm stem model.....P/N 12-03425

ELECTRONIC XTENDER



The industries two most popular bore gage ranges combined in one easy-to-use ELECTRONIC set! All the same benefits included in the X-Tender Dial Bore Gage are now available with an electronic indicator providing inch/metric reading capability, preset size of master for absolute reading and minimum hold feature to lock on the bore size as the gauge is rocked in the part to be measured. P/N 12-03416

METRIC BORE GAUGE SETTING MASTER



Using the new Fowler Bore Gauge Setting Master and the included gage blocks you can now quickly and easily set virtually any bore gage from 0 to 150mm in diameter with an accuracy of .003mm. Gone are the numerous masters formerly required to accurately set your bore gage for use. Now with one setting master kit and the included gage blocks you can set your bore gage with ease. Each Fowler Bore Gauge Setting Master Kit includes a bore gage setting master, and a 36 piece gage block set. Both come packaged in a high quality aircraft-style, shop-hardened aluminum case! All packaged in a high quality, shop-hardened aircraft-style aluminum case! Bore Gauge shown is not included.....P/N 12-03421

POLY-CAL ELECTRONIC CALIPER



Poly-Cal Electronic Caliper Inch/Metric/ Fraction. Range: 6"/150mm.
P/N 12-03426



ELECTRONIC CALIPERS

Description	Part No.	Price
lv 6"/150mm 54-100-330-1	12-03417	.
lv 12"/300mm 54-100-332-0	12-03418	.

XTRA-VALUE CALIPER AND DEPTH ATTACHMENT COMBO



Accuracy: .001"/.02mm. Range: 6"/150mm. Large east to read display. Resolution: .0005"/.01mm. Direct inch/metric conversion. Absolute/incre-mental measurement. 4-way measuringP/N 12-03427

MASTER BORE GAUGE SET



Setting Bore gages is a breeze with Fowler's new Bore Gauge Setting Master Kit! Using the new Fowler Bore Gauge Setting Master and the included gage blocks you can now quickly and easily set virtually any bore gage from 0 to 6" in diameter with an accuracy of .0001". Gone are the numerous masters formerly required to accurately set your bore gage for use. Now with one setting master kit and the included gage blocks you can set your bore gage with ease. Each Fowler Bore Gauge Setting Master Kit includes a bore gage setting master, and a 36 piece gage block set. Both come packaged in a high quality aircraft-style, shop-hardened aluminum case! All packaged in a high quality, shop-hardened aircraft-style aluminum case! Bore Gauge shown is not includedP/N 12-03408

TO

CALIPERS – MICROMETERS – KNOCK-OUT PUNCHES

DIGITAL FRACTION CALIPERS



The Digital Fractional Caliper brings you three universal systems of measurement, making it an equally practical choice for both professional and do-it-yourself projects. The high-contrast digital display easily switches between inches, millimeters and fractions, with guaranteed accuracy to 0.001". In addition, the rugged stainless steel design delivers accurate readings of inside, outside, step and depth measurements. The Fraction+ comes with a foam padded plastic case for safe storage when not in use. **Features:** • Stainless Steel Caliper • Tri-Mode digital display – inches, millimeters, and fractions • For making inside, outside, depth and step measurements • Resolution 0.0005" (0.01mm) • Accuracy 0.001" (0.02mm) • Auto on/off feature preserves battery life • Bar scale is graduated in inches and millimeters • Free-wheeling friction roller advances and retracts slide • Extendable depth gage for use in slots and small holes • Etched and filled black graduations • Convenient foam-padded case for storage.

Digital Fraction Caliper - 6" P/N 12-02012
 Digital Fraction Caliper - 8" P/N 12-02013
 Digital Fraction Caliper - 12" P/N 12-02014

FRACTIONAL DIGITAL CALIPER 3 INCH



Three universal systems of measurement. Guaranteed accuracy to 0.001". Delivers accurate readings of inside, outside, step and depth measurements. This 3" caliper fits conveniently into your pocket for working in the field. Range 0-3" (0-76mm) Resolution 0.0005" (0.01mm or 1/64"). Accuracy 0.001" (+/- 0.02mm). Auto on/off feature preserves battery life. Free-wheeling friction roller advances and retracts slide. Extendable depth gage for use in slots and small holes. Replacement Battery - SR54 or LR54 P/N 12-02307

DIAL INDICATOR



0-1" Dial indicator with measuring resolution of .001"; equipped with mounting lug on back of body for multiple mounting options P/N 12-02709

STANDARD AND METRIC DIAL INDICATOR

AGD 2 series. Dial face reads in inch (black) or metric (red). Range: 1"/25mm. Graduation: .001"/.01mm. Reading: 0-100. Separated dial for Inch and Metric. Rotating bezel with clamp. Lugback included. P/N 12-03659



PROFESSIONAL GRADE MICROMETER



0-1" Professional grade micrometer with measuring resolution of .0001"; carbide anvil faces for long life and durability. Includes plastic case. P/N 12-02707

DIGITAL SLIDING T-BEVEL



Takes the guesswork out of angle duplication and eliminates the problems associated with analog readings and manual measurement transfer. This is the first and only digital T-bevel on the market. It is ideal for measuring, storing and transferring inside and outside angles when building cabinetry, furniture and picture frames; installing tile and more. This highly accurate tool offers easy-to-read measurements via a large LCD display and integrates an 8" stainless steel blade with a steel locking knob. Practical function buttons make it ultra-convenient for setting and transferring measurements instantly. P/N 12-03226

OFFSET KNOCKOUT PUNCHES (WITCHES FINGER)



Can be used to knock out those hard to reach stubborn fasteners. Available in 1/8", 5/32", 3/16", and 1/4" tip diameter. Also available in a 4 piece set.

Size	Part No.	Price
1/8"	12-02927	.
5/32"	12-02926	.
3/16"	12-02928	.
1/4"	12-02929	.
Set of 4	12-02925	.



"CENTER IT" HOLE DRILLING JIG

"Center It" is a jig used to drill holes in pipe or tube stock. To use the Center It, simply place it on your drill-press table, run the bit down (with the motor off) to hold the centered jig on the bit, then bolt the jig to the press table. No clamping of the tube is necessary; the angled flats of the jig hold it in a centered position. Your holes are automatically centered on the tube with no center-punching necessary. If the tube is too fat to drill in a single operation, simply turn it over. The device is useful to kitplane builders who have to drill several holes in a single tube or many tubes because no clamping or center-punching of the tube is required. It also makes short work of drilling P/N 12-20815

DRILL RITE PRECISION DRILL GUIDE



Light and portable, this tool provides straight and true holes every time. Your electric hand drill will perform like a professional drill press. The easy, accurate way to drill any curved surface: Simply place the Drill Rite VGuide™ on any type of pipe or round stock, from 1/2" to 2 1/2" in diameter. Swing the gate closed and lock it down. Insert the proper drill bit in the guide bushing and drill a precisely accurate hole. Includes super hardened drill bushings for popular 3/16" and 1/4" holes for rivets and aircraft hardware. Precision made in the U.S.A. from high quality aircraft grade aluminum. P/N 12-00836

PLATE NUT DRILL JIG



One piece heat treated tool steel jig. Use for accurate & fast drilling of rivet holes for plate nuts. Has flexible handle design. Use for both on lug (both holes on 1 side) & two lug (holes on both sides) style nut plates - K1000 & K1100 style nutplates.

#6 Plate Nut Drill Jig P/N 12-03041
 #8 Plate Nut Drill Jig P/N 12-03042
 #10 Plate Nut Drill Jig P/N 12-03043

DIGITAL PRECISION PROTRACTOR



Displays absolute and relative angle measurements in a large, easy-to-read LCD window. This display offers a hold function and can be inverted 180° for easy reading when the tool is upside down. It features a 6" (150mm) stainless steel pivoting protractor arm with a knurled locking nut and one-button zero calibration, which ensures accurate readings every time. Take the guesswork out of measuring, marking and reading angles on your next woodworking or home improvement project. The UltraTECH Pro-ANGLE Digital Protractor displays absolute and relative angle measurements in a large, easy-to-read LCD window. For user convenience and comfort, the display offers a hold function and is easily inverted, or flipped, 180 degrees for reading upside down. Angles in any plane can be measured with accuracy to 0.1 degree and 0.05 degree resolution anywhere within a 0.00 to 180 degree range, making this tool useful for many applications P/N 12-03224

DIGITAL ANGLE FINDERS



These new angle finders combine the ruggedness of analog rulers (standard and metric) together with the digital technology needed for complete accuracy when measuring inside, outside and reverse angles. Precise measurements prevent waste by facilitating exact miter cuts. One button activates the reverse angle function, a hold button digitally saves the measurement and the large ergonomic locking knob saves the angle manually. A big LCD readout makes measurements extremely easy to read while an innovative center check notch enables exact ruler placement marking. The Models 822 (Patent Pending) are ideal for framing, custom furniture-building, stair and patio construction, flooring, tiling basically all woodworking, carpentry and contractor needs in the shop or in the field.

5 inch P/N 12-03223
 10 inch P/N 12-03222

ECONOMY AIRCRAFT TOOLS



HAND RIVET SQUEEZER

Features includes an all-steel construction, adjustable set holder (accepts all sets with 3/16" shank), and long handles for increased force. The yoke is made of the highest quality tool steel, and by simply removing 3 pins you can change the yoke to match your riveting or dimpling application. Each squeezer includes the yoke of the coordinating size.

Description	Part No.	Price	Description	Part No.	Price
1" Squeezer	12-01460	.	1" Yoke	12-01457	.
2" Squeezer	12-01461	.	2" Yoke	12-01458	.
3" Squeezer	12-01462	.	3" Yoke	12-01459	.

STAINLESS STEEL HAND SQUEEZER

This stainless steel hand squeezer made of quality stainless steel construction. Features include an adjustable set holder (accepts all sets and dies with 3/16" shank) and a locking lever arm. Yokes are easily interchangeable by simply removing three roll pins and designed to accept yokes and parts made by other stainless steel hand squeezer manufacturers. Includes a 3" Yoke. 1.5" is sold separately.

S/S Hand Squeezer 3" P/N 12-01464

1.5" Yoke P/N 12-01547

3" Yoke P/N 12-01548

QUICK CHANGE PIN

Quick Change Pin. Makes changing yokes quicker & easier.
3/4" Reach P/N 12-01798

RIVET SET FOR SQUEEZER

(FLUSH & CUPPED) - Made of steel and heat-treated for long wear and tool life. .187" (3/16") shank. • 2 Flush sets required for Flush Head Rivets • 1 Flush and 1 Cup required for Round Head Rivets. • Sold as individual items / not a pair

Description	Part No.	Price
Flush 1/8	12-01466	.
Flush 3/16	12-01554	.
Flush 5/16	12-01556	.
Flush 3/8	12-01557	.
Flush 7/16	12-01558	.

Description	Part No.	Price
Flush 1/2	12-01559	.
Cupped 1/8	12-01561	.
Cupped 5/32	12-01562	.
Cupped 3/16	12-01563	.



1-1/2" AND 3 YOKES

• Holds 3/16" die sets • Adjustable set holder • Stainless steel construction. 1-1/2" P/N 12-01547
3" P/N 12-01548

DIMPLE DIES

For any .187 shank diameter squeezer.
3/32" P/N 12-01468
1/8" P/N 12-01564
5/32" P/N 12-01565
3/16" P/N 12-01566
Economy Dimple Die Set Includes: 3/32", 1/8", 5/32", 3/16" P/N 12-01467



SCREW REMOVAL TOOL

• Useful in removing screws that are corroded or have stripped heads • 401 Parker taper shank for use in rivet gun • 3/8" square socket end • Use standard Phillips or Slotted insert bits • Rivet gun required • 1/4" hex adapter not included. 4" Tool P/N 12-01567



MICRO-STOP

This tool permits you to set the desired cut depth to help eliminate mistakes and skin damage. • 1/4" Shaft travel • Depth adjustable in .001" increments • 1/4"-28 Female Threads • Rated for 3,000 RPM P/N 12-01470

HEAVY DUTY RIVET CUTTER

This heavy-duty rotary cutter is designed to quickly and easily shear aluminum rivets. Just insert the rivet into the correct sized hole and set to desired length; adjustable for 1/4" to 3/4" long rivets in 1/16" increments. Cuts diameters of 3/32", 1/8", 5/32", 3/16", 7/32", and 1/4".
P/N 12-01471

ECONOMY RIVET SET

2.5" Straight & Offset Rivet. Made of steel and heat-treated for long tool life. The precision made cups are highly polished. • .401 shank • Length: 2.5" • Cup Sizes: 3/32", 1/8", 5/32" & 3/16" • For AN470 rivets
2.5" Straight 3/32" P/N 12-02318
2.5" Straight 1/8" P/N 12-02319
2.5" Straight 5/32" P/N 12-02320
2.5" Straight 3/16" P/N 12-02321

ALUMINUM BODY MINI AIR VACUUM

A handy air powered vacuum works off an air compressor and is simple to use. Attached 12" clear plasticflex tube can easily get into tiny spaces to clean. The canvas bag is easily removed for cleaning P/N 12-01474

CHIP CHASER

Ideal for removing chips and burrs from between metal after drilling rivet holes. Each chaser features a plastic molded handle and flexible steel blade with hook on the end. Blades are 5.5" and 2.5" long.
2.5" P/N 12-01597
5.5" P/N 12-01476



DOGLEG DEBURRING TOOL

Swivel action of this tool makes deburring holes fast and easy. Shaft includes a 1/4"-28 threaded holder.
*Flute De-burring cutter sold separately - P/N 12-00625
P/N 12-01478

Accessories

Replacement Deburring Bit P/N 12-03755
Swivel Handle Only P/N 12-00623
Extension Shaft only P/N 12-00624
HSS 3 Flute De-burring cutter P/N 12-00625



CLECO PLIERS

Used in limited access areas, requires less travel per activation P/N 12-01480

CLECALL STEEL UPRIGHT

CLECO PLIERS

Clecall Upright Steel Cleco Pliers: Faster to use / Easier to Activate. Spring Loaded to open with less effort. Latest design accommodates 1/4" Cleco width. Forged steel for heavy duty use. Handle Compression distance reduced further for more comfort. Reduce fatigue and wrist pain. Vertical profile installs clecos in tight areas with ease. Install clecos on upside down surfaces easily Economy Steel Pliers P/N 12-03756

SPRING TENSION CLAMPS

(ZINC ALLOY YOKE OR STEEL YOKE)

Spring tension clamps can be applied in a fraction of the time required for ordinary screw clamps. The clamp, with 2" throat depth, has a Zamak alloy yoke and a steel spring which provides a 70 lb. clamping pressure. Designed for use with sheet holder pliers.

Description	Grip Range	Part No.	Price
Zinc Alloy	0 - 1/2"	12-01481	.
Steel 2"	0 - 1/2"	12-01482	.
Steel 3"	1/4" - 5/8"	12-01483	.



SIDE GRIP CLAMPS

Designed to hold two or more work pieces together where no holes exist. Clamping force is applied at edge of work. Spring loaded, plier actuated. The lack of a takeup screw makes it impossible to over-tighten and damage the work surfaces or the clamp. There are 4 standard sizes : 1/2 x 1/2", 1/2 x 1", 3/4 x 1/2", 3/4 x 1".

Description	Part No.	Price
1/2" x 1/2"	12-01484	.
1/2" x 1"	12-01485	.
3/4" x 1/2"	12-01486	.
3/4" x 1"	12-01487	.

DRILL STOPS

Use when drilling in sheet metal to help eliminate drill breakage & surface marks. Safely keeps drill from going too far through the work. Drill stops have a coiled spring to cushion the drill breakthrough & prevents the drill chuck from marring the work surface. Color coded for easy identification.
#10 P/N 12-01488 #20 P/N 12-01489
#30 P/N 12-01490 #40 P/N 12-01491
#1/4 P/N 12-01492 #5/16 P/N 12-01493

CYLINDER BASE NUT WRENCHES

Where torque application accuracy is critical these tools meet the requirement. They offer excellent rigidity and surpass other wrenches in overall quality and efficiency. Wrench Type A is for sizes 1/2", 9/16", 5/8", and 3/4" hex nuts. Also available in a kit.

Type A 1/2" P/N 12-01525
Type A 9/16" P/N 12-01568
Type A 5/8" P/N 12-01569
Cylinder Base Nut Wrench Set P/N 12-02302

TO

ECONOMY AIRCRAFT TOOLS



STRAP DUPLICATOR (BUSHING TYPE)

For drilling an accurate hole in overlapping sheets. The Bushing type duplicator is used by sliding the end with the pin between the sheets and locating the hole to be duplicated from inside. P/N 12-01498 is pictured.

Description	Part No.	Price	Description	Part No.	Price
#10 6-1/4"	12-01494	.	#10 13-1/4"	12-01499	.
#21 6-1/4"	12-01495	.	#21 13-1/4"	12-01501	.
#30 6-1/4"	12-01496	.	#30 13-1/4"	12-01502	.
#40 6-1/4"	12-01497	.	#40 13-1/4"	12-01503	.
1/4" 6-1/4"	12-01498	.	1/4" 13-1/4"	12-01504	.



STRAP DUPLICATOR (INVERTED TYPE)

For drilling an accurate hole in overlapping sheets. The inverted type duplicator allows you to locate a hole from the back of an overlapping sheet. #10 #21 #30 #40 1/4" drill sizes, 6-1/4" or 13-1/4". P/N 12-01507 is pictured.

Description	Part No.	Price	Description	Part No.	Price
#10 6-1/4"	12-01505	.	#10 13-1/4"	12-01510	.
#21 6-1/4"	12-01506	.	#21 13-1/4"	12-01511	.
#30 6-1/4"	12-01507	.	#30 13-1/4"	12-01512	.
#40 6-1/4"	12-01508	.	#40 13-1/4"	12-01513	.
1/4" 6-1/4"	12-01509	.	1/4" 13-1/4"	12-01514	.

ECONOMY BLIND HOLE SPOTTERS



12-01775

12-01774

12-01773

12-01771

For inserting into drilled holes already bored and marking exact center for opposite hole. Available size: 5/16", 1/4", 3/16", 5/32" and 1/8"

Description	Part No.	Price	Description	Part No.	Price
5/16"	12-01775	.	3/16"	12-01773	.
1/4"	12-01774	.	1/8"	12-01771	.



EDGE BREAKER

This tool allows the quick removal of burrs and roughness from the edges of sheet metal. .25" or .187" in diameter grooved blade with safety shield. Safety-grip plastic handleP/N 12-01527



AIR SWIVELS & REGULATOR TOOLS

Air Swivel Connector W/ Regulator (Pictured to the left)P/N 12-01530
Air Swivel Connector.....P/N 12-01529
Air Swivel Regulator.....P/N 12-01545



BRASS RIVET SET

This rivet set has a soft face to prevent damage to the fastener when inserted or removed. Fits into any standard rivet gun or air hammer that supports .401" shank tooling, 3 1/8" overall length.P/N 12-01543



RIVET GUN SHAFT REDUCER

Rivet set adapter sleeve, .401 shank. Made of hardened steel (SKD11) and is open at both ends to allow maximum riveting powerP/N 12-01544



ECONOMY SAFETY WIRE TWISTERS

These top quality twisting lock pliers with automatic return are economically priced and extremely durable. Features a sharp cutting edge and will twist up to .060" dia. safety wire. Length 6" & 9". Foreign made.
6"P/N 12-01472
12"P/N 12-01473



CANNON CONNECTOR PLIERS

The tool features serrated jaws for improved gripping and a slip joint for improved leverage. Ideal for all common cannon connector applications.

P/N 12-01531



SHOP HEAD RIVET GAUGE SET

Set of four gauges for -3, -4, -5, -6 rivets. Each gauge measures Minimum height and Minimum diameter of shop heads AFTER setting. Eliminates guessing if your rivets are properly set. Works for measuring both universal head and flush rivets. Precision machined to size from 2024 aluminum. Rivet size permanently stamped on each gauge. Color coded anodized finish.

P/N 12-01533



RIVET LENGTH GAUGE

One gauge measure -3, -4, -5, -6 rivets. Used to check for proper length of rivets Before setting. Eliminates measuring and guessing of rivets lengths. Works for both universal head and flush rivets. Precision machined to size from 2024 aluminum. Rivet size permanently stamped. Blue anodized finish.

P/N 12-01534



DRILL EXTENSION THREADED

These are used to extend a straight chuck drill to 1/4-28 female threads.

2"P/N 12-01535
4"P/N 12-01536
6"P/N 12-01537



DRILL EXTENSION DUAL THREADED

Use these different length extensions in your 90° or 45° drills. 1/4"-28 male threads on one end and 1/4"-28 female threads on other.

2"P/N 12-01541
4"P/N 12-01542



SLIM MICRO-STOP

A slim design that's only 11/16" outside diameter. Used for those narrow areas that can't be reached with a standard micro-stop. • 1/4" Shaft • 1/4"-28 Female Threads • Adjustable in .001" increments • 1/2" Cutter Capacity • Rates for 3000 RPM use.

P/N 12-01790



MICRO-STOP (LONG NOSE)

This micro-stop reaches into very confined areas. • 5/16" Quick-change Shaft or regular chuck • 1/4"-28 Female Threads • Adjustable in .001" increments • 3/8" Cutter Capacity • Rates for 3000 RPM use

P/N 12-01789



MICRO-STOP (NYLON FACE)

• 1/4" Shaft • 1/4"-28 Female Threads • Adjustable in .001" increments • 11/16" Cutter Capacity • Rates for 3000 RPM useP/N 12-01788



5.5" STRAIGHT & OFFSET RIVETS

Made of steel and heat-treated for long tool life. The precision made cups are highly polished. .401 shank. Length: 5.5". Cup Sizes: 3/32", 1/8", 5/32" & 3/16". For AN470 rivets.

Size	Straight	Price	Offset	Price
3/32"	12-02326	.	12-02330	.
1/8"	12-02327	.	12-02331	.
5/32"	12-02328	.	12-02332	.
3/16"	12-02329	.	12-02333	.



ALUMINUM & NYLON RIVETS

This rivet set has a soft face to prevent damage to the fastener when inserted or removed. Fits into any standard rivet gun or air hammer that supports

.401" shank tooling. • Surface: 1" • Length: 3 1/8"

Nylon RivetP/N 12-02342

Aluminum RivetP/N 12-02343



RADIUS OR FILLET GAUGES

16 leaves, especially for checking radius of inside and outside fillets and corners. Checks 1/32 to 17/64" by 64ths.....P/N 432A

ECONOMY AIRCRAFT TOOLS



ECONOMY RIVET GUNS

These popular 2X /3X /4X rivet guns used in aircraft manufacturing plants worldwide. "X" series rivet gun has an incomparable teasing triggers, allowing you to slowly begin riveting without damaging the skin. A lightweight aluminum handle with powder coat finish for comfort. Hardened & precision ground steel piston, cylinder, spool valve for long life. Includes spring retainer & brass air regulator.

Length	BPM	Capacity	Bore	Shank	Stroke	Weight (lbs)	Part No.	Price
6-11/16"	2580	1/8"	1/2"	.401"	2-1/4"	3.1	12-02034	.
7-5/16"	2160	3/16"	1/2"	.401"	2-7/8"	3.2	12-02035	.
8-1/2"	1740	1/4"	1/2"	.401"	3-1/16"	3.4	12-02036	.

ECONOMY FLUTING PLIERS

Narrow type fluting pliers are used for straightening out or coxing sheet metal into the correct shape. This tool makes narrow and precise flutes in sheet metal.

P/N 12-01782

RIVET HOLDER

This tool holds your rivet, small bolt, or screw so you can get into those hard-to-reach areas.

P/N 12-01791

RIVET ECONOMY COLLAR CUTTER

se with your rivet gun to easily remove Huck and Hi-Lok type collars. Shank: 0.401 Size includes 1/8", 5/32", 3/16" & 1/4" Overall Length: 5 1/2"

1/8" P/N 12-02275

5/32" P/N 12-02276

3/16" P/N 12-02277

1/4" P/N 12-02278

ECONOMY FLUSH SET

5.5" & 7.5" Flush Set Made of steel and heat-treated for long tool life. Faces are polished to a high luster for smooth, precise riveting. .401 shank Surface: 1" Length: 5.5" & 7.5"

5.5" P/N 12-02273

7.5" P/N 12-02274

JIFFY RIVET SETTERS

ECONOMY JIFFY STRAIGHT RIVET SETTER
For use with "Jiffy" style rivet gun. Made of steel and heat-treated for long tool life. The precision made cups and highly polished. 401 shank, Length: 1-3/4", Cup Sizes: 3/32", 1/8", 5/32" & 3/16", For AN470 rivets

3/32" x 1-3/16" P/N 12-02381

1/8" x 1-3/16" P/N 12-02382

5/32" x 1-3/16" P/N 12-02383

3/16" x 1-3/16" P/N 12-02385

ECONOMY JIFFY OFFSET RIVET SETTER

For use with "Jiffy" style rivet guns. Made of steel and heat-treated for long tool life. The precision made cups are highly polished. 401 shank, Length: 1-3/4", Cup Sizes: 3/32", 1/8", 5/32" & 3/16", For AN470 rivets

3/32" x 1-3/4" P/N 12-02387

1/8" x 1-3/4" P/N 12-02388

5/32" x 1-3/4" P/N 12-02389

3/16" x 1-3/4" P/N 12-02390

ECONOMY RIVET GUN PUNCH

For use to remove rivet after collar is split. Made of steel and heat-treated for long tool life. 401 shank, Length: 3-1/2", Punch size includes: 3/32", 1/8", 5/32" & 3/16" & 1/4"

3-1/2" x 1/8" P/N 12-02392

3-1/2" x 5/32" P/N 12-02393

3-1/2" x 3/16" P/N 12-02394

3-1/2" x 1/4" P/N 12-02395

ECONOMY JIFFY FLUSH RIVET SETTER - For use with "Jiffy" style rivet gun, polished flush surface Length: 1-3/16", For AN470 Rivets

P/N 12-02386

QUICK-CHANGE CHUCK

Allows tool change in seconds. Designed for drilling bits, countersinks, etc. with quick-change ends. 3/8" x 24 thread. P/N 12-01778

C-SET

This C-Rivet Set bends around obstacles and allows you to reach into awkward areas for riveting. • 3/16" diameter hole for any squeezer sets or dimple dies with 3/16" shaft • 401 shaft P/N 12-01776

RED BOX RIVET GUN TOOL KITS

RED BOX RIVET GUN TOOL KITS

- 1pc Rivet Gun (Choose Size 2X, 3X or 4X) • 1pc Brass Regulator • 1pc Beehive Retainer • 1pc Handi Retainer
- 4pcs 3.5" Straight Rivet Set (3/32", 1/8" 5/32", 3/16")
- 1pc Standard Flush Set (size: surface diameter 1", length 2-1/2") • 1pc Marvel Air Tool Oil (Made in USA)
- 1pc Thread Seal Tape • 1pc Air Tool Fitting

2X Rivet Gun Tool Kit P/N 12-02047

3X Rivet Gun Tool Kit P/N 12-02048

4X Rivet Gun Tool Kit P/N 12-02049

RED BOX FLUSH RIVET SET

P/N 12-02050

RED BOX 3.5" RIVET SET

Size	Straight	Price	Offset	Price
3/32"	12-02051	.	12-02322	.
1/8"	12-02052	.	12-02323	.
5/32"	12-02053	.	12-02324	.
3/16"	12-02054	.	12-02325	.

RED BOX 7.5" RIVET SET

Size	Straight	Price	Offset	Price
3/32"	12-02334	.	12-02338	.
1/8"	12-02335	.	12-02339	.
5/32"	12-02336	.	12-02340	.
3/16"	12-02337	.	12-02341	.

TURNBUCKLE WRENCH

2 inch diameter turnbuckle wrench easily rotates turnbuckle while chain tool holds the cable ends in precise alignment and prevents them from rotating.

P/N 12-01795

TURNBUCKLE CHAIN TOOL

This tool consists of two clamps joined by sprocket type (bicycle) chain. When clamped to cable and fittings at each side of the turnbuckle, anchor the cable to allow free adjustment of the turnbuckle. The adjustment becomes a two hand instead of three hand adjustment P/N 12-01794

SPEED HANDLE 3/8"

Useful for quickly tightening and loosening a nut or bolt particularly where other types of wrenches will not reach.

P/N 12-01797

PHENOLIC SCRAPER

Scraper Blade, 2" wide x 6.5" long x 3/8" thick. Designed for use with a rivet gun (.401 shank). Phenolic scrapers are perfect for safely removing sealant, adhesives, stickers, labels, grime, and more. P/N 12-01796

SKIN WEDGE

Made of 4140 steel and heat-treated to perfection. • 7" long x 1" wide • Body thickness 1/4" P/N 12-01793

HEX KEYS

Designed to use when installing Hi-Lok style fasteners. Includes set screw and Allen key.

1/8" P/N 12-01785

5/64" P/N 12-01786

3/32" P/N 12-01787

ECONOMY DRILL

EXTENSION THREADED

This threaded extension allows you to chuck threaded drill bits or countersinks into a quick-change chuck. It features a 5/16" quick change shaft on one end, and 1/4" -28 female threads on the other. The overall length of the extension is 3.46" ... P/N 12-01781

60° C-SET

Excellent for limited access areas. • 60° Angle • .401 shaft P/N 12-01777

FORD WRENCHES

• General-purpose adjustable wrench • Sliding Jaw • Forged from Crescent special Analysis Tool Steel • Chrome-plated • Precision Machined

9" Wrench P/N 12-03795

11" Wrench P/N 12-01784

15" Wrench P/N 12-03796

SEALANT MIXER

Designed to quickly and efficiently mix all types of pre-filled Semkit® packages. Has a 1/4" shank. Chuck it up in your drill to mix Semkit® sealant tubes P/N 12-01792

TO

ATS TOOLS

ATS TOOLS

ATS AIR NIBBLER



ATS8300

- Cuts up to 16 ga (.060" / 15 mm) steel or aluminum
 - Easily replaceable punch and die
 - Weight 1.74 lbs (.79 kg)
- P/N 12-01414.....

ATS PUNCH & FLANGING TOOLS



ATS8400

- Capacity 16ga (.060"/15mm) steel
 - Punch Diameter 3/16" (5 mm)
 - Flange width 1/2" (12 mm)
 - Rubber comfort grip
 - 9-3/4" (248 mm) Overall Length
 - 2.75 lbs (1.25 kg)
- P/N 12-01413.....

ATS AIR HYDRAULIC RIVETER



ATS8805

- Pulling Force 2,300 lbs (1,045 Kg)
 - Rivet Capacity 3/16" aluminum or mild steel
 - Stroke Length .63" (16 mm)
 - Nosepieces: 3/32" (2.4 mm), 1/8" (3.2 mm), 5/32" (4.0 mm), 3/16" (4.8 mm)
 - Weight 3.26 lbs (1.48 kg)
- P/N 12-01423.....

ATS MINI ANGLE DIE GRINDER



ATS5105

- 1/4" (6.4 mm) Collet Size
 - 5-1/2" (140 mm) Overall Length
 - 1.1 lbs (.5 kg)
 - 20,000 RPM Free Speed
- P/N 12-01416.....

ATS MINI DSIE GRINDER



ATS5101

- 1/4" (6.4 mm) Collet Size
 - Front exhaust keeps work area clean!
 - Very light weight .79 lbs (.36 kg)
 - 26,000 RPM Free Speed
- P/N 12-01417.....

ATS 3" CUT-OFF TOOL



ATS8502

- 3" (75 mm) disc capacity, 3/8" (15 mm) mount
 - Free speed 20,000 RPM
 - Weight 1.74 lbs (.79 kg)
- P/N 12-01420.....

ATS 90 DEGREE ANGLE DRILL



ATS6132

- Spindle 1/4"-28 Thread
 - Head Length 1.08" (2.7 mm)
 - 2,800 RPM
 - Head Width .65" (1.6 mm) .33 hp
 - 10" (254 mm) Overall Length
 - Variable speed control 1.6 lbs (.73 kg)
- P/N 12-01422.....

ATS HEAVY DUTY AIR DRILL



ATS6101

- 3/8" (9.5 mm) Jacobs® Chuck
 - Full Cage Gear
 - 2,600 RPM
 - Variable speed control
 - .67 hp (.5 kw)
 - Ergonomic Design for Maximum Comfort
 - 7-1/2" (190 mm) Overall Length
 - 2.07 lbs (.94 kg)
- P/N 12-01418.....

ATS HD REVERSIBLE AIR DRILL



ATS6104

- 3/8" (9.5 mm) Jacobs® Chuck
 - Full Cage Gear For Smooth Operation
 - 2,400 RPM • Variable Speed Control
 - Fully Reversible with Positive Stop
 - 7-1/2" (190 mm) Overall Length
 - .67 hp (.5 kw)
 - 2.86 lbs (1.3 kg)
- P/N 12-01421.....

ATS PALM DRILL



ATS6100

- 1/4" (6.4 mm) Jacobs® Chuck
 - Two-stage (Low/High) Control Trigger
 - 5-7/8" (150 mm) Overall Length
 - 1.54 lbs (.7 kg)
 - 2,800 RPM Free Speed
- P/N 12-01424.....

BENCH GRINDER DISC - VERY FINE



Quickly remove carbon from pistons and valve stems. Great for light deburring head bolts and studs. One disc is flexible when run alone. Stack as many discs on at a time for the desired finish and removal rate. Safer than a wire wheel, with a much better finish. The very fine grade Bench Grinder Discs are packaged 10 to a pack, and the medium grade Bench Grinder Discs are packaged 5 to a pack. Size: 8" x 1/2" • Grain: A/O • Grade: Very Fine • Max RPM: 3,000 P/N 12-00849



7" CUTTING WHEEL 1/2" X BRE 1/16"

Oxide abrasive wheel - fine abrasive for burr-free cutting of thin wall tubing and applications which require a fine finish.

• Wheel Size: 7" x 1/16" x 1/2" • Max RPM: 8,700
• Weight: 6lbs • Standard Grades: A60TBE 3C14 P/N 09-02564



DIGITAL MAGNETO TIMER WITH PISTON STOP

The Digital Magneto Timer allows mechanics to efficiently set Magneto Timing using digital accuracy.

It is compatible with virtually all horizontally opposed aircraft engines, especially Lycoming and Continental.

The Digital Magneto Timer improves upon existing legacy analog timing devices familiar to seasoned mechanics: the "Flower Pot" or "Tin Can."

Universal design mounts on virtually any propeller in seconds without goofy bungee cords. No reconfiguring for 2-blade, 3-blade, fixed, constant speed, etc. Can be used with spinner on or off for convenience during other maintenance. Zero chance of scratching or marring a propeller. P/N 12-06832



PISTON STOP

This Piston Stop is custom made to work with our Digital Magneto Timer. It is compatible with virtually all horizontally opposed aircraft engines using 18MM spark plugs, especially Lycoming and Continental. P/N 12-06838



DIGITAL MEASURING KIT

The Complete Digital Measuring Kit includes the Digital Magneto Timer, Piston Stop, and Digital Protractor in a custom foam-lined pelican-style case. P/N 12-06834

DIGITAL PROTRACTOR



Whether your angle measuring needs demand a protractor, level or angle finder, this has you covered. You'll wonder how you lived without one of these.

Used for: • Flight control surface rigging • Setting adjustable propeller blade angle • Aircraft leveling and more... P/N 12-06835

BOSCH TOP HANDLE JIG SAW 5 INCH RANDOM ORBIT SANDER MODEL NO. ROS20VSK



Features:

- Best all-around sanding performance and convenience.
- Twist-off translucent dust canister shows dust level and detaches easily. Ant-spillback design prevents dust from spilling on removal.
- Bosch Microfilter system traps dust particles as small as 1/2 micron.
- Hook-Tight™ hook-and-loop disk attachment ensures firm grip of


standard hook-and-loop sanding discs. • Comfortable, ergonomic soft-grip top and body • Integral pad dampening system prevents swirl marks • Soft microcellular backing pad ensures smooth, fine finish on flat or contoured surfaces. • Variable-speed dial allows matching of speed to work piece and task P/N 12-01766

AIRCRAFT STATIC TEST ADAPTER



SA3Y-P-UNI-2 Aircraft Static Test Adapter. • Automatically attaches to aircraft fuselage • High pressure hoses with quick release fittings • Press to release button for static adapter removal • Safety check valves for power failure and system leaks • High impact yellow case with internal electric vacuum pump • Designed to fit most general & military aircraft static ports • Comes with 1/2 in center suction cup. Accessory kits are available for specific static ports • Power input: 115 V AC 50/60 Hz. Continuous operation • Custom voltages available: 12vdc, 28vdc, 115 vac & 220 vac • Size: 12" x 10" Wt. 8.5lbs. P/N 13-20266

AXLE AND NOSE FORK NUT WRENCHES



These great little specialty tools are a must for all aircraft owners and mechanics as well. They are available in two sizes and will cover almost all GA aircraft. They are precision laser cut from 4130 chrome moly aircraft grade steel and heat treated to a 42 rockwell hardness so they are very strong. They then get zinc plated to prevent corrosion and provide many years of service. These are .135" thick so you can rotate axle nuts and test fit the keepers or cotter pins in place. These tools weigh 4 oz. each.

1-1/2 inch.....P/N 05-12377
1-3/4 inch.....P/N 05-12475

ULTIMATE PROPELLER WRENCHES



Unlike anything on the market at any price. This tool makes short work of R&R on your constant speed propeller. The one end ratchets without removal from the bolts and the other end is extremely strong fully reversible Crows Foot for torquing the propeller. Precision laser cut from 4340 Aircraft grade steel, heat treated to a 50 rockwell. Crows foot end is fully C&C machined for a perfect fit on the bolts. Utilizes both 1/2" & 3/8" ratchets, torque wrenches and extension tools. Crows foot end is offset 15° for double the versatility for difficult bolts behind prop blades. Black oxide plated for years of service and corrosion protection.

5/8 inch.....P/N 05-12481
3/4 inch.....P/N 05-12375



MAG CLAW HELPING HANDS

You've got delicate tasks to do like soldering and you need a helping hand. Grab a Mag Claw and get to work. Unlike cheaper versions, the base is heavy enough to sit at your work bench and not tip over. The real magic happens when you turn the Mag Switch ON. You need to work in a

difficult area -- crawling under a truck, behind an instrument panel, over the side of a scissor lift. The best tools get out of the way and let you do your thing. Activate the Mag Switch and 170 LBS of holding power keeps the Mag Claw absolutely anchored so you can focus 100% on getting the job done. P/N 12-06836

SUNEX TOOLS



14 PIECE SAE COMBINATION WRENCH SET

- Canvas pouch included
 - Raised panel design
 - High density, dropped forged alloy steel for strength 9714
- Includes: 712-3/8", 726-13/16, 714-7/16", 728-7/8", 716-1/2", 730-15/16", 718-9/16", 732-1", 720-5/8", 734-1-1/16", 722-11/16", 736-1-1/8", 724-3/4", 740-1-1/4"
P/N 12-01970



14 PIECE ANGLE HEAD SAE WRENCH SET

- Canvas pouch included
 - Fully polished drop forged alloy steel
 - 15° and 60° angled ends for added convenience 9914
- Includes: 991401-3/8", 991408-13/16, 991402-7/16", 991409-7/8", 991403-1/2", 991410-15/16", 991404-9/16", 991411-1", 991405-5/8", 991412-1-1/16", 991406-11/16", 991413-1-1/8", 991407-3/4", 991414-1-1/4"
P/N 12-01975



14 PIECE ANGLE HEAD METRIC WRENCH SET

- Canvas pouch included
 - Fully polished drop forged alloy steel
 - 15° and 60° angled ends for added convenience 9914M
- Includes: 991404M-6mm, 991408M-13mm, 991403M-7mm, 991409M-14mm, 991402M-8mm, 991410M-15mm, 991401M-9mm, 991411M-16mm, 991405M-10mm, 991412M-17mm, 991406M-11mm, 991413M-18mm, 991407M-12mm, 991414M-19mm
P/N 12-01976



8 PIECE FLARE NUT CROWFOOT WRENCH SET

- 3/8" Drive
 - Fully polished drop forged alloy steel
 - Mounted on a convenient storage rail 9708
- Includes: 970802-3/8", 970810-5/8", 970804-7/16", 970812-11/16", 970806-1/2", 970814-3/4", 970807-9/16", 970818-7/8"
P/N 12-01968



7 PIECE JUMBO STRAIGHT CROWFOOT WRENCH SET

- Fully polished drop forged alloy steel
 - 1/2" Drive
 - Reusable blow mold storage tray 9720
- Includes: 97732-1", 97734-1-1/16", 97736-1-1/8", 97738-1-3/16", 97740-1-1/4", 97760-1-3/8", 97744-1-1/2"
P/N 12-01971



6 PIECE JUMBO CROWFOOT WRENCH SET

- Fully polished drop forged alloy steel
 - 1/2" Drive
 - Reusable blow mold storage tray 9722
- Includes: 97746-1-5/8", 97752-2", 97748-1-3/4", 97754-2-1/8", 97750-1-7/8", 97756-2-1/4"
P/N 12-01972



10 PIECE METRIC FLARE NUT CROWFOOT WRENCH SET

- Fully polished drop forged alloy steel
 - 3/8" Drive
 - Mounted on a convenient storage rail 9710M
- Includes: 971010-10mm, 971015-15mm, 971011-11mm, 971016-16mm, 971012-12mm, 971017-17mm, 971013-13mm, 971018-18mm, 971014-14mm, 971019-19mm
P/N 12-01969



8 PIECE JUMBO METRIC STRAIGHT CROWFOOT WRENCH SET

- Fully polished drop forged alloy steel
 - Mounted on storage rail for convenience
 - Reusable blow mold storage tray 9730
- Includes: 97324-24mm, 97328-28mm, 97325-25mm, 97329-29mm, 97326-26mm, 97330-30mm, 97327-27mm, 97332-32mm
P/N 12-01973

SUNEX PNEUMATIC TOOLS

1/4" DRIVE MINI AIR RATCHET WRENCH



SX1068 Specification	
Free Speed(RPM) @90PSI	230
Torque (ft.lbs.) @90PSI	25
Square Drive	1/4
Min. Hose Size	2/8
Recommend Air Pressure (PSI)	90
Average Air Consumption (CFM)	3
Sound Level (dBA)	87
Length (In.)	8

- Lever throttle for positive speed control
- Ball detent socket retainer
- Rear exhaust
- Also available: 1/4" head kitP/N 12-01932



3/8" DRIVE PISTOL GRIP IMPACT WRENCH

SX821A Specification	
Square Drive (In.)	3/8
Max. Torque (ft. lbs @90PSI)	75
Working Torque (ft.lbs.)	30-60
Free Speed (RPM@90PSI)	10,000
Air Inlet (NPT)	1/4
Recommended Air Pressure (PSI)	90
Average Air Consumption (CFM)	4
Sound Level (dBA)	84
Length (In.)	5

- Ring socket retainer for rapid socket changes
- Front bumper for added protection
- Built-in regulator for added protection
- Reliable dog clutch mechanism for dependable service
- Reliable dog clutch mechanism for dependable service
P/N 12-01937

SUNEX SERVICE CART WITH LOCKING TOP & DRAWER



- This combination makes for the ultimate cart
- The locking drawer and locking top are keyed the same, so the user only has one set of keys
- Clip-on roller-bearing slides on drawer • Large, easy to maneuver 4" wheels: 2 locking and 2 standard, Chrome 16 gauge steel frame, Durable powder coated finish, 3" deep shelves, Available colors: red, blue, black & yellow 8013A

Specifications: Load capacity (lbs.) -350, Shipping weight (lbs.)-69.5
P/N 12-01963

4 PIECE 3/8 INCH DRIVE UNIVERSAL SPARK PLUG SOCKET SET



- All four sized spark plug sockets in one convenient set • Fully polished chrome vanadium alloy steel for durability • Universal joint design for easy access in confined areas • Rubber inserts hold spark plug securely during installation and removal • Includes new 9/16" size • Convenient blow mold case • Fully guaranteed. 87602

Specifications: 8844-9/16, 8844-5/8, 8844- 3/4, 8844-13/16P/N 12-01966

SUNEX DELUXE CREEPER



- 1" Rugged steel tube construction • Oversize frame for added comfort • Tapered frame and head rest for extra clearance in tight areas • 3-1/2" Heavy duty chrome finished casters with rubber tread • 5-Position stick shift headrest adjustment sytem • Rear drop frame design for extra leg comfort 8515

Specifications: Length (In.)-45.5, Width (In.)-19, Height (Headrest Down)-5, Height (Headrest Up)-9.5, Shipping Weight (lbs)-29.0, Bed Size-30.625 x 16.5 x 2.5.....P/N 12-01964

SUNEX SOCKET DRIVES



Radius corner design causes the socket to grab the sturdy wall, or flat, of the fastener instead of grabbing the corners, resulting in less corner wear on the fastener. CR-MO alloy steel for long life.

Drive	Socket	Description	Part No.	Price
3/4"	41mm	Sunex 441MD	12-03448	.
3/4"	46mm	Sunex 446MD	12-03450	.



SUNEX REDUCING SOCKETS

CR-MO alloy steel for long life. Steel ball retainer on male end. Will meet a variety of needs. Lifetime warranty. Fully guaranteed.
2302 1/2"(f)x3/4"(m).....12-03452

SUNEX 1/4" 0.5HP ANGLED DIE GRINDER



Sunex HD® 1/4" 0.5hp line of Die Grinders provides all of the durability, features, and power required for today's demanding applications. With the powerful 0.5hp motor, you are given the torque to get through even the toughest material and twice the horse power of the average die grinder. The speed control dial and soft composite handles enhances your ability to complete any job quickly and efficiently. With these top of the line products, you will find all of the features and speed you need to get the job done right the first time. 2 Year Limited Warranty. Weight lbs.(kg): 1.5 (0.7)P/N 12-03192

SUNEX 1/4" 1.0HP SUPER DUTY DIE GRINDER



The new Sunex HD® 1/4" 1.0hp Super Duty Die Grinder has all the durability, features, and power mechanics want in an industrial die grinder. With the powerful 1.0hp motor, you're provided with the torque needed to get through the toughest of materials. The no slip Erickson Industrial Collet, allows you to work efficiently, as it holds your accessories securely without slippage. You would normally pay twice as much for a tool of this caliber. 2 Year Limited Warranty. Weight lbs.(kg): 1.7 (0.77).
P/N 12-03193

5 TON CAPACITY 8-WAY, 2-3 JAW REVERSIBLE PULLER



- Can be assembled to make a two or three jaw puller when additional stability is needed
- Reversible jaw design for added versatility and a broader range of pulling capability • Ideal for pulling gears, bearings, pulleys and other press fit parts 3908

Specifications: Maximum reach (in.)-5.5, Maximum spread (in.) -7

P/N 12-01957

3/16 INCH HEAVY DUTY RIVET GUN



- Sets all conventional, standard blind rivets and all structural blind rivets, mono bolts and t-rivets up to and including 3/16" diameter in all materials • Comes with nose pieces in 3/32", 1/8", 5/32", and 3/16" sizes • Features a pulling (traction) power of 1,983 lbf @90PSI • Forged aluminum handle • Nose pieces stored conveniently underneath base of gun • Minimum air pressure required is 90 PSI, 7 Bars • Includes blow molded storage case SX0918T

Specifications: Air Pressure (PSI) -75-90, Stroke Length (In.) -11/16, Height (In.) -12-3/8, Weight (Lbs.) -3.70, Min. Hose Size (I.D.) -3/8, Air Inlet Size (NPT) -1/4. • Tips available on special request.

P/N 12-01933

FUEL MULE - AVIATION EDITION



The Smart Ass Fuel Mule electric fuel caddy solves a problem many of us have in our daily work or hobbies that has never been sufficiently solved before. And after getting that feedback from aviators, we here at Smart Ass Products have now added a package of upgrades specifically to better adapt this most amazing of motorized electric gas caddies specifically for AVGAS/100LL use and Aviation use. For the countless airplane/flight lovers that live in fly-in

communities and airparks across the USA and elsewhere. For the farmer/ agricultural flyer monitoring and crop dusting their fields. Where the pilots don't typically have fuel readily available onsite as it's a small privately owned air strip being used. We've got your solution in the Smart Ass Fuel Mule - Aviation Edition. Built Tough for Aviation: The Fuel Mule's rugged construction allows you to easily transfer 50 gallons, even on ramps with 22-degree inclines. The Smart Ass Fuel Mule Motorized 50-gallon gas caddy is powered by a 750w Brushless IP65-sealed motor and off-road tires, making it ideal for airparks, hangars, and aviation fueling on paved or unpaved airstrips/taxiways. Easy to use: Designed for confined areas and navigation through tight spaces (doorways even) and rugged terrain, it has a thumb throttle, hand brake, and an automated shutoff fuel nozzle to eliminate spills. Rechargeable onboard batteries allow for endless journeys to fuel your aircraft or equipment. One charge typically lasts 6-8 uses or more.
P/N 13-26029

FUEL MULE - AVIATION EDITION



The Smart Ass FuelMule is the ONLY motorized electric gas caddy with pump holding up to 50 gallons to allow for effortless transporting of fuel to nearly any desired off road location. Made right here in the USA, you won't be disappointed. This is not your daddy's gas caddy. This is a whole new animal... a FuelMule you might say, the 911 of the Gas Caddy world. And it's a BEAST.

Powerful and Built Tough: Transport 50 gallons nearly effortlessly with the FuelMule's sturdy construction and overbuilt design, even on loading ramp inclines up to 22 degrees.. With a 750w Brushless IP65 sealed drive motor and off-road wheels/tires, the Smart Ass FuelMule Motorized 50 gallon gas caddy with pump conquers darn near any terrain effortlessly. It's powerful motor ensures easy climbs and the careful design ensures precise maneuvering, making it ideal for transporting fuel to any destination, on or off-road.

Simple to Operate: Designed for rough terrain and tight spaces, the Smart Ass FuelMule boasts user-friendly controls like a thumb throttle and hand brake to allow you to Start, stop, and climb hills and ramps effortlessly. And uses an automatic shutoff fuel nozzle to prevent spills. Rechargeable batteries offer several trips to fuel your boat or whatever you're fueling, easily recharged with the included charger.

P/N 13-26030

TO

METAL WORKING TOOLS

3-IN-1 SHEET METAL ROLLERS



These Sheet Metal Roller Presses have 6 adjustable hardened fingers, spring loaded sheet hold-down, heavy cast iron frame, grooves for wire rolling, 1 1/4" slip rolls, adjustable back gauge. Works up to 20 gauge sheet metal. Stand not included but available for the 30" Roller only.

Model	Size	Part No.	Price
SP3-1-3	30"	12-03467	.
SP3-1-40	40"	12-03469	.
SP3-1-52	52"	12-03470	.
Roller Stand for 30" Roller.....P/N 12-03468.....			



POWER BEAD ROLLER

Heavy Duty Power Bead Roller, works off 110v gear drive motor and has a 43" throat depth with an adjustable fence and includes floor stand, die rack, 2 step dies, 2 bead dies and a 45 degree tipping die.

P/N 12-03472.....

HAND SHEARS



Throatless design, adjustable work hold down, arched top blade allows for effortless cutting throughout the stroke and indexable bottom blade. Up to 3/16" steel, up to 3/8" round bar.

Description	Part No.	Price
Hand Shear 5" Model SPS5	12-03459	.
Hand Shear 8" Model SPS8	12-03460	.
Hand Shear 10" Model SPS10	12-03457	.
Hand Shear 12" Model SPS12	12-03458	.



ROTARY SHEAR

Shape cutter, easily cut any shape up to 1/8" thick, forged steel frame, ratcheting head, adjustable cutter, adjustable work stop.

P/N 12-03463



3-IN-1 SHEET METAL ROLLER

This Sheet Metal Roller Press is 12" length with 5 adjustable hardened fingers, material hold-down, back gauge, 1-1/4" slip rolls with 1/16", 1/8" and 3/16" grooves for wire forming. Works up to 20 gauge sheet metal.

P/N 12-03466

HAND SHEAR MULTI PURPOSE CUTTER

5" Top length, throatless design, adjustable work hold down, geared reduction handle makes cutting easy.

P/N 12-03464



MANUAL SHEET METAL CORNER NOTCHER

Heavy cast iron frame, adjustable work stops, 4 x 4 blades adjustable blade gap, high chrome blades, adjustable gibs for long life.

P/N 12-03461



SQUARE NOTCHER

Foot operated, 3" x 3" blades, adjustable work stops, adjustable blade gap. 16 Gauge.

P/N 12-03465



52 INCH FOOT SHEAR

52" Blade length, cast iron frame, front arm supports, high carbon blade, adjustable blade gap, front squaring arm with scale, back gauge with inch and metric scale.

P/N 12-03462



ENGLISH WHEEL THROAT DEPTH

Heavy Duty Construction, Quick Release Lower Anvil and Includes Floor Stand. * Part Number 12-03474 - Can Be Used For Rolling, Beading and Forming Foot Operated Height Adjustment.

Model	Description	Top Wheel	Ball Bearings	Includes	Part No.	Price
WFEW-2	English Wheel 28" Throat Depth With Stand	8"	Precision	5 Pieces Radius Anvils And One Flat Anvil	12-03473	.
WFEW45T	English Wheel 43" Throat Depth*	6"	Super Wide 3" Anvils Precision	4 Top Wheels And 10 Lower Anvils	12-03474	.



METAL WORKING TOOLS



PLANISHING HAMMER

26" Throat depth, quick adjust anvil height. Includes floor stand with handy retractable wheels, industrial hammer at 4600 beats per minute, includes in line oiler, pressure regulator and foot pedal. Up to 1/16" steel.

P/N 12-03475

PLANISHING HAMMER

Uses shop air 50-100 psi 4 cfm, 19-5/8" throat depth, features quick adjust anvil height/pressure, includes floor stand, 3 anvil, air motor, foot pedal. 16 Gauge Mild Steel.

P/N 12-03476



SHRINKER / STRETCHER MACHINE



Ideal for creating repair panels for wheel openings, winshields, etc., Produce curves as tight as 3" radius, drilled bottom for bench mounting or clamp in a bench vise. Cast iron frame. 18 Gauge mild steel, 16 gauge aluminum

P/N 12-03477



DEEP THROAT SHRINKER STRETCHERS

8" Throat Depth. 18 Gauge Mild Steel, 16 Gauge Aluminum

P/N 12-03478

Adjustable Stand

P/N 12-03479

WOODWARD-FAB BOSS16 BOX & PAN BRAKE



Maximum box depth 4", removable fingers - 2", 3", 4", bend angle stop 0 to 130 degrees, floor stand included, counterweight included, upper beam is adjustable for radius bending. 16 Gauge Mild Steel, 20 Gauge Stainless Steel

P/N 12-03480



12 INCH 20 GA BOX & PAN BRAKE

12" Length, 5 hardened, removable fingers, cam lock handle. 20 Gauge.....

P/N 12-03481



24 INCH 20 GA BOX AND PAN BRAKE

Solid heavy duty construction, reinforced frame, hardened and ground fingers, finger to bend leaf gap can be adjusted, maximum box depth, 5 removable fingers. 20 Gauge.....

P/N 12-03482



EURO BRAKE

50" Box and Pan Brake, 14 Gauge Capacity Mild Steel, Air Cylinder Assist "No Need for Weights", Adjustable Hold Down Force, Adjustable Bend Gap, Foot Operated Locking Hold Down, Hardened and Ground Fingers plus removable lower fingers for custom bends. 14 Gauge

P/N 12-03483



MODEL S TURBO BURR

55,000 rpm, 1/4" air hose connection, 60 to 120 psi, 5 to 11 cfm, feed up to 2" per second. Ideal for deburring and edge finishing, puts a safety edge on sheet metal in one pass. .015" Minimum material thickness.

P/N 12-03484



WELD SHAVER

Removes both flat "butt" welds and inside 90 degree corner "fillet" welds. Uses carbide inserts, milling type cutter head. Remove weld beads up to 1/2".

P/N 12-03485



SLIP ROLL

12" Length, 1" diameter hardened rolls, 1/16", 1/8" 3/16" wire grooves. 20 Gauge.

P/N 12-03486



24 INCH 20 GAUGE SLIP ROLL

24" Length, 1-1/2" diameter rolls, solid precision ground rollers, heavy cast iron frame, quick release top roll, hardened steel gears, wire grooves for wire rolling. 20 Gauge.

P/N 12-03487



WOODWARD-FAB ELITE SHEET METAL / WIRE SLIP ROLLER 24 INCH

24" Length, 2-3/8" diameter drive rolls, 2-1/2" rear adjustable roll. Uses single front mounted hand wheel for adjusting the rear roll. Uses single hand wheel to adjust the bottom roll for material thickness, roll tapers up to 15 degrees, fully enclosed gear box, cast iron end plates, wire grooves for wire rolling. Floor stand included.

16 Gauge.

P/N 12-03488



SHOP PRESSES

Hydraulic hand pump, press plates included 7" stroke, easy read gauge. 10 Ton - 14 1/2" inside clearance.

Model	Description	Stroke	Inside Clearance	Part No.	Price
PR102	10 Ton Shop Press	7"	10 Ton - 14 1/2"	12-03492	.
PR103	12 Ton Shop Press	7"	12 Ton - 18 1/2"	12-03493	.
PR104	20 Ton Shop Press	7 1/2"	20 Ton - 19 1/2"	12-03494	.



2 INCH PIPE NOTCHER

Use with any hand held drill motor or drill press, create any angle saddle notch on pipe for weld fit up, uses standard hole saw blades up to 2 1/2", compound angle adjustment. Holds up to 2" pipe, uses up to 2 1/2" hole saws

P/N 12-03495



PIPE / TUBE NOTCHER

Solid steel construction, use with any 1/2" hand drill, accepts standard hole saw cutters, hardened and ground spindle, superior needle bearing support, adjustable angle to 50 degrees mount to bench top or clamp in vise. 3/4 - 3" O.D. Pipe/tube.

P/N 12-03496



TRACE-A-PUNCH NIBBLER

1 1/2 Hp, 110 V, 6 3/4" Throat Depth, Cuts Any Shape Metal Or Plastic. 1/8" Maximum Thickness.

P/N 12-03497



TRACE-A-PUNCH NIBBLER

3 HP, 220/440 V, 3 phase, 16" throat depth, cuts any shape metal or plastic. 3/16" Maximum thickness

P/N 12-03498

TO

MALLETS – GRINDERS – POLISHERS – SANDERS



GARLAND NON-MARRING MALLETS AND HAMMERS

Since 1866, Garland Manufacturing has been supplying America with top-quality products made from the finest water buffalo rawhide. Today, they're the leader in the manufacture of soft-faced mallets and hammers of unsurpassed quality. All Garland products are manufactured in the U.S.A. to ISO 9002 international quality standards. They combine superior craftsmanship with the best materials and then field-test their products extensively on a range of surface finishes to meet the requirements of the industries in which they're used. Industries ranging from foundries and electrical manufacturing to jewelry and woodworking. Soft-faced hammers are preferred by both craftsmen and production workers.

RAWHIDE AND WEIGHTED RAWHIDE MALLETS

Garland's all-rawhide mallets are made of tough, long-wearing, water buffalo rawhide. They're ideal for use on broad-faced striking surfaces in a broad range of applications.

RAWHIDE MALLETS					
Size	Face Dia. (Inches)	Head Length (Inches)	Weight (oz.)	Part No.	Price
0	1"	2"	2	12-00749	.
2	1-1/2"	3"	6	12-00750	.
4	2"	3-1/2"	11	12-00751	.
6	2-3/4"	4-3/4"	24	12-00752	.

WEIGHTED RAWHIDE MALLETS					
Size	Face Dia. (Inches)	Head Length (Inches)	Weight (oz.)	Part No.	Price
7	1-1/4"	2-1/2"	8	12-00753	.
10	2"	3-1/2"	20	12-00754	.

NYLON Mallet



Nylon mallet works great for shaping metal.

Specifications: • Head Length: 3 1/2" • Face Diameter: 1 1/2" • Hammer Length: 10"P/N 12-02895

SPLIT-HEAD HAMMER - NO FACE



The split-head hammer does the work of six different hammers because the face can be easily changed. Available in two sizes. Many materials & surfaces. Die moving or positioning. Assembly. Electric Motor Repair. Propeller Repair. Foundry.

Face Dia.	Head Length	Weight	Part No.	Price
1-3/4"	3-1/4"	2.5 lbs	12-00965	.
2-3/4"	4"	5.25 lbs	12-00966	.

VAN SANT MULTITool ATTACHMENTS

The Multitool belt and disc grinding attachments for your bench grinder are must-have tools for any fabricator! These versatile tools remove material up to 5 times faster than with the equivalent grit grinding wheel. Belts change in seconds from grinding, to sand deburr or polish. Quality construction is backed by a 1-year warranty. The attachments are all available with motor options to suit the hobbyist or the professional. Includes 1 belt and 1 disc. Fits 1/2HP or more grinders with 1/2" or 5/8" shaft. Visit our website for a Compatibility Template in PDF



MT362 MULTITOOL GRINDER ATTACHMENT

(2"X36" Belt and one disc)
P/N 12-02064



M482 MULTITOOL GRINDER ATTACHMENT

(2"X48" Belt and one disc)
P/N 12-02068



M462 MULTITOOL GRINDER ATTACHMENT

(4"X48" Belt and one disc)
P/N 12-02070



DISC GRINDER MITER ATTACHMENT

The Multitool disc grinding attachment for your bench grinder are must-have tools for any fabricator! These versatile tools remove material up to 5 times faster than with the equivalent grit grinding wheelP/N 12-02071

VAN SANT - VISE AND GRINDER MOUNT WITH WALL RECEIVER



Completely free up work surfaces and eliminate floor space wasted on stands with the wall mount tool receiver (sold separately). Featuring a 4 x 8 x 1/4 inch thick mounting surface with 3 mounting holes, it can be mounted to any vertical surface in the shop. In addition to a 5/8

inch detent pin, the mount also features two sets of jam bolts to produce a rock-solid fit for the receiver tube. The included tool mount is constructed from 2 x 2 3/16 inch wall square tubing and a 3/8 inch thick steel plate measuring 8.5 x 9.5 inches. The mounting plate features both 90 and 120 degree slots to accommodate a wide variety of tools, or you can drill your own holes as needed.

P/N 12-05414

VAN SANT VISE AND GRINDER MOUNT WITH TABLE RECEIVER



The included tool mount is constructed from 2x2 3/16 wall square tubing and a 3/8 inch thick steel plate measuring 8.5 x 9.5 inches. The mounting plate features both 90 and 120 degree slots to accommodate a wide variety of tools, or you can drill your own holes as needed.

Specifications: • Weight (pounds): 18 • Dimensions (LxWxH): 13" x 9.5" x 2.5"P/N 12-05413



VAN SANT WALL MOUNT RECEIVER

Completely free up work surfaces and eliminate floor space wasted on stands with the wall mount tool receiver. Featuring a 4 x 8 x 1/4" thick mounting surface with 3 mounting holes, it can be mounted to any vertical surface in the shop. In addition to a 5/8" detent pin, the mount also features two sets of jam bolts to produce a rock-solid fit for the receiver tube.

P/N 12-05412

VAN SANT TABLE MOUNT RECEIVER



Keep your work surface clear and eliminate the need for dedicated machine stands with this handy receiver mount. Featuring a 6 inch square mounting surface with 5/8 diameter holes on 4 in centers, it can be easily attached to your own workbench, Buildpro, or Certiflat welding tables. The mount also features two sets of jam bolts to produce a rock-solid fit. The receiver is designed to accept 2 x 3/16 inch wall square tubing.....P/N 12-05410

VAN SANT GRINDER MOUNT FOR RECEIVER



Vans Sant Grinder Mount Plate can be used with Receiver Mount (sold separately) to keep your bench grinder, vise, or any other tool close at hand, but not take up valuable bench space. Use the existing 1/2 inch wide slots in the 8.5 x 9.5 inch plate, or drill your own mounting holes. Built from 2 inch x 3/16 wall square tube and 3/8 inch plate and finished in black zinc.

P/N 12-05411

BAILEIGH METAL TOOLS

BAILEIGH MANUAL BENDER FB-4



Baileigh's FB-4 form bender is a useful tool for press bending ornamental iron, mild steel, aluminum and other metals. This flat bar bender is a manual press brake and can create 90 degree bends by simply turning a hand lever until the desired angle is accomplished.

This metal bender is perfect for hobbyists, ornamental iron artists, and much more. Of course this is not a production bender, but is perfect for small runs or those one off applications. • Capacity: 3/16" • Shipping Dimensions (L/W/H): 17"7"/8" • Shipping Weight: 19 lbs.

P/N 13-08987

BAILEIGH MANUAL ROLL BENDER R-M3



Baileigh The R-M3 metal ring roller is perfect for any typical sheet metal shop for bending small rod up to 1/4". Metal artists, technical schools, and home shops can find hundreds of uses to keep this well built angle roll in use.

This single pinch metal ring roller can be bench or pedestal mounted. It has fine adjustment for the top roll and to power this machine there is a manual hand crank.

• Capacity Solid Round: .25" • Capacity Flat Bar: 1" (.1875 • Minimum Diameter: 3" • Handle Length: 13.5" • Power Requirement: Manual • Shipping Dimensions (L/W/H): 15" / 7" / 8" • Shipping Weight: 18 lbs

P/N 13-08975

BAILEIGH MANUAL ROLL BENDER R-M7



Baileigh Industrial's Roll Bender R-M7's small size makes it highly portable and versatile. Although not for rolling complete circles, it makes quick work of large radius bends. Many different tooling options are available as well.

Capacity / Size / Diameter: • Pipe - 1.5" / 20" dia • Round Tube - 1.25"(.078") / 31.5" dia • Square Tube - 2" / 70" dia • Rectangle Tube - 1x2" / 30" dia • Flat bar - Easy Way / 10" dia

Specifications: • Roll adjustment: Manual • Pinch: Single • Shaft Center Distance (lower rolls): Adjustable • Driven Rolls: 1 • Speeds: N/A • Motor: N/A • Power Requirements: Manual • Shipping Weight: 150 lbs.

P/N 13-08976

BAILEIGH MANUAL ROLL BENDER R-M10



Baileigh's R-M10 tube roller has a powerful manual drive system that has a maximum capacity of 1-1/4" (.078" wall) round tubing capacity (mild steel). It comes standard with segment rolls that allows for many different types of flat bar, some angle iron and some square to be rolled. This roll bender has optional rolls for round tube and pipe, as well as other profiles.

This tube roller is typically in stock for fast deliveries. For further information on the R-M10 roll bender, please contact your Baileigh representative.

Capacity / Size / Diameter: • Pipe - 1" (Sch.40) / 28" dia • Round Tube - 1.25"(.078") / 31.5" dia • Square Tube - 1.2" (.078") / 35" dia • Angle Iron - 1.25" (.157") / 30" dia • Solid Square - .75" / 20" dia • Solid Round - .875" / 20" dia • Flat Bar Easy Way - 2" / 15.75" dia • Flat Bar Hard Way - .75" / 6.5" dia

All Specs based on 60,000 PSI (42 kg/mm2) Tensile Strength - Mild Steel. Specs are to be used as a base line for purchase purposes only. Baileigh Industrial cannot control Variations in Material.

Technical Specifications and Standard Equipment: • Two rolls are manually powered • Special cast frame • Shafts are hardened with special steel material • Rolls are special steel material hardened and ground • Gears milled with full material • Standard rolls, guide rollers, manual working • Users manual.P/N 13-08977

BAILEIGH MANUAL TUBE BENDER RDB-10



The RDB-10 manual hand tube bender is the perfect bending machine for bending air lines, brake lines, fuel lines, and general hydraulic lines. Thus, if you're into building or repairing race cars, auto and airplane repair or restoration, an automated machinery builder, or much more, the RDB-10 manual bender will save you time and money from the moment you use it.

This manual tube bender comes standard with 10 different size combinations from 1/4" to 5/8" OD in either 3 or 5 times the diameter radiuses. This manual tube bender works great with mild steel, certain coppers and aluminums, as well as stainless steel. It comes

standard with a heavy pedestal, tooling rack, and bending machine.

The RDB-10 hand bender is easy to use and can bend tubing up to 180 degrees. Because of the design, this bending machine can do serpentine bends with ease at very tight radiuses depending on the OD, material and wall thickness.P/N 13-08971

BAILEIGH MANUAL TUBE BENDER RDB-25



The RDB-25 manual tube bender is the perfect machine for hose hobbyists that need to bend tube on a budget. It is made from a sturdy cast iron frame and can be bench or pedestal mounted with the included pedestal. The RDB-25 from Baileigh Industrial was designed to bend the most common sizes of tubing on safe centerline radii to ensure great looking bends. This

manual tubing bender comes standard with the following round tube die sets: • 3/8" OD x 2" CLR • 1/2" OD x 2.25" CLR • 9/16" OD x 2.5" CLR • 5/8" OD x 3" CLR • 3/4" OD x 3.5" CLR • 7/8" OD x 4.25" CLR • 3/4" Square x 3.75" CLR • 1" Square x 4.25" CLR

Also included is a very nice carrying case, which allows the bender to be stored when not in use. Contact a Baileigh Industrial representative for more information on the RDB-25 manual tube bender.

P/N 13-08972

BAILEIGH MANUAL TUBE BENDER RDB-050



The RDB-050 manual tube bender was designed as an affordable bender that has enough capacity for just about any chassis fabrication shop. Can bend up to 2-1/2" OD mild steel with a wall thickness of .120" and 2" OD Chromalloy with a wall thickness of .120". The most unique feature of the RDB-050 is that it has three selectable bending speeds. The proper speed for each

application depends on the material type, OD and wall thickness. The RDB-050 manual tube bender has no dis-assembly or assembly needed to produce a bend. Simply walk up to the RDB-050 and put your tubing into the hook arm insert and begin bending. When the bend is complete, return the machine to the home position and pull your bend out, or position it for the next bend. The RDB-050 tube bender can bend up to 200 degrees and an anti spring back mechanism holds each bend in place as the operator ratchets forward. **Tooling List - Sold separately - Call 1-877-477-7823 for pricing.**.....P/N 13-08973

BAILEIGH MANUAL TUBE BENDER RDB-100



This bending machine can be fitted with hundreds of round and square tubing die sets as well as round pipe dies sets with a maximum center line radius up to 7". This manual tube bender uses a large diameter indexing plate that allows the fabricator to bend up to 206 degrees (180 degrees plus spring back) in one shot without having to re-index and re-pin common on most other manual pipe benders on the market. Each pull of the handle bends the material approximately 8 degrees. When requirements are for lighter gauge materials this tube bending machines indexing unit can be shut off and the handle can be put into a manual override housing that allows the operator to simply walk around the manual bender and bend without the power of the indexing unit. Includes the stand, degree dial, and handleP/N 13-08974

BAILEIGH ENGLISH WHEEL EW-28



This quality English wheel is a heavily built floor stand unit that can handle smoothing compound curves into mild steel and aluminum sheet metal for restoration or bodywork on autos, planes, cycles and much more. This machine has an 18-gauge mild steel capacity and has an ample 28" throat depth. The EW-28 English wheel comes standard with an 8" X 2" upper roll and includes six lower anvil rolls with varying crowns. The radius included for the six lower rolls are 2", 3", 4", 6", 8", and 12". Like other Baileigh English wheels, the machine comes intact with only minor assembly required (no welding required). The frame members are constructed of heavy walled square tubing that is electro welded to a truss system offering little flex

at maximum capacity. **Specifications:** • Capacity (Mild Steel): 18 ga • Throat Depth: 28" • Shipping Dimensions(L/W/H): 36"/34"/15" • Shipping Weight: 191 lbs.....P/N 13-09001

BAILEIGH ENGLISH WHEEL MANUALLY OPERATED EW-40



Baileigh's quality English Wheels have a generous 40" throat depth, and ship complete with five bottom anvils and one 7" upper wheel. It has a rugged electro welded frame and stand for ease of use and years of quality shaping and forming metal. The EW-40 English wheel has an 18 gauge mild steel capacity and a 13 gauge aluminum capacity. Like all Baileigh metal forming machines the EW-40 is a quality machine

for a reasonable price. This machine is in stock for quick deliveries.

Specifications: • Capacity (Mild Steel): 18 ga • Throat Depth: 40" • Shipping Dimensions(L/W/H): 72"/36"/15" • Shipping Weight: 388 lbs

P/N 13-09003

TO

BAILEIGH METAL TOOLS

BAILEIGH MANUAL MULTI-PURPOSE BENDER MCB-650



Baileigh's MCB-650 flat bar benders are ruggedly built to bend up to 5/16" X 1-1/4" mild steel or 1/4" X 2" mild steel as the maximum capacity. This is a fantastic ornamental bender to have for railings, fences, gates and for hundreds of additional applications. This flat bar bender comes standard with 7 die sets from 1" up to 3" for flat metal. Other solid applications such as wire, rod, and bar can be bent as well up to 200 degrees. Specifications: • Bend Capacity: 2" x .236" • Angle Capacity: 0 - 200 deg • Shipping Dimensions (L/W/H): 35"/10.5"/10.5" • Shipping Weight: 53 lbsP/N 13-08988

BAILEIGH MANUAL HOLE SAW NOTCHER TN-200H



This coping machine can be vertically mounted in a drill press, or for larger pieces it can be horizontally mounted on a weld bench and powered by a portable drill.

This hole saw tube notcher is made of thick 3/8 inch aluminum with a heavy bronze bushing that is replaceable if ever need be. The spindle is made of a 1/2" hardened shaft for longevity and less vibration. This coping machine can notch at angles up to 45 degrees in less than 30 seconds and has a capacity of up to 2" round tube.

Specifications: • Notch Capacity (OD): 2" • Spindle Size: 1/2" • Spindle Adapter: 1/2" - 5/8" • Shipping Size (L/W/H): 12" / 7" / 5" • Shipping Weight: 10 lbs.....P/N 13-08978

BAILEIGH MANUAL HOLE SAW NOTCHER TN-250



This is the most revolutionary hole saw pipe notcher on the market and is perfect for chassis, roll cages, and much more. This is the only hole saw tubing notcher that is always centered left to right and up and down. This coping machine is constructed of heavy steel plate to reduce vibration, uses a 1-1/4" Thompson® shaft that rides in a sealed needle bearing for longevity of the machine and hole saw. The TN-250 tube notchers vise has a powerful screw with a built in hand wheel

that opens and closes the unique six radial clamping jaws. Can notch up to 2-1/2" OD and allows for steep angles as the hole saw can pivot up to 230 degrees making it the most versatile notching machine on the market. This tubing notcher can easily offset in seconds for off center notches and does not require crazy shims or spacers common on inferior modelsP/N 13-08981

BAILEIGH MANUAL HOLE SAW NOTCHER TN-300



This tubing notcher can notch from 1/2" to 3" tube and 1/2" to 2-1/2" Schedule 40 Pipe in materials such as aluminum, mild steel, chromoly, and stainless steel. The tube notchers vise has a quick release so

different notch angles can be set up in a second or two and locked in with a solid taper lock. Can notch up to 60 degrees as standard, but with extended hole saws and the right size OD, notches up to 75 degrees can be attained. The vise is a self centering that is on an acme screw for quick tightening and releasing of the material. An offset adjustment is standard for those jobs where more strength is needed like on some hand railing or chassis frame applications. The drive carriage on the TN-300 pipe notcher houses an industrial grade motor tied to a direct drive gear reducer that turns the hole saw with ease, even at full capacity. This tube notchers carriage rides on a solid V-block roller assembly that is coupled to a large drive wheel for pushing the hole saw into the material with limited vibration and ease. This simple unique design on this tube notcher makes notching tube and pipe a breeze.

P/N 13-08983

BAILEIGH MSS-16 MANUAL 16GA SHRINKER STRETCHER



Baileigh's MSS-16 sheet metal shrinker stretcher has a heavy cast iron frame with a deep 8" throat. It comes standard with two sets of jaws, one for shrinking and one for stretching. This is a manually operated machine that has a heavy engagement lever that allows perfect control of the function at hand. This sheet metal shrinker stretcher has a mild steel capacity of 16 gauge and an aluminum capacity of 14 gauge. No other sheet metal shrinker on the market has such a generous throat depth with a heavy maximum capacity for such a good price.

Specifications: • Capacity Mild Steel: 16 ga • Capacity Aluminum: 14 ga • Throat Depth: 8"

P/N 13-08985

BAILEIGH MSS-16F SHRINKER STRETCHER



This model is a heavy duty foot operated shrinker stretcher for shrinking or stretching mild steel sheet metal down to 16-gauge (14-gauge aluminum) in thickness. This is the perfect machine for working metal for auto, cycle or airplane body work. This machine is ruggedly built and can shrink or stretch metal with ease at full capacity.

Our MSS-16F metal shrinker stretcher has a rugged floor stand with foot pedal control to actuate the jaws allowing the hands to be

free to properly work the material. An ample 6" throat depth allows for hundreds of applications to be worked on compared to smaller throat depth models. The rugged base has wheels allowing for mobility in any cramped shop environment.

This metal stretcher shrinker has quick jaw change over features built in so changing from shrinking metal to stretching metal takes only a couple seconds. This machine comes standard with jaws to stretch metal and shrink metal (note: optional aluminum jaws are available).

Specifications: • Capacity Mild Steel: 16 ga • Throat Depth: 6" • Weight: 78 lbsP/N 13-08986

BAILEIGH ONE PHASE POWER HAMMER



MH-19 power hammer is the most revolutionary metal forming machine on the market. In summary you can achieve stretching, shrinking, planishing, and doming with critical adjustments on the fly while in operation. This is the ultimate metal shaping and forming power hammer on the market. No other machine is as versatile as the MH-19. The MH-19 includes the following tooling to get you up and running quickly at no extra charge: (1) set of thumbnail shrink dies, (1) flat top die, and

(1) Lower planishing die.

Specifications: • Capacity Mid Steel: 16 ga • Capacity Aluminum: 12 ga • Throat Depth: 19" • Length of Stroke: .177 - .550 (adjustable) • Tooling Height Adjustment: 2" • Speed (variable): 0 - 1500 beats/minute • Power Requirement: 220v / 1 phase • Shipping Dimensions: (L/W/H)60"/60"/84" • Shipping Weight: 1600 lbsP/N 12-02645

BAILEIGH MSS-18 MANUAL 18GA SHRINKER STRETCHER



Baileigh's MSS-18 sheet metal shrinker stretcher has one complete shrinker and one complete stretcher both in their own cast iron housings. The heavy casting assures a quality function at full capacity, which is 18-gauge in mild steel and 16-gauge in aluminum. Both units are foot operated and come with a heavy steel stand as standard.

Specifications: • Capacity Mild Steel: 18 ga • Capacity Aluminum: 16 ga • Minimum Forming Diameter: 4.5" • Stand: IncludedP/N 13-08984

DE-ICE EQUIPMENT – DIGITAL THERMOMETERS



DE-ICING CARTS

Aircraft De-icing Gasoline Engine Powered Carts are designed for outdoor de-icing operations. These carts use either a 5.0 or a 5.5 hp air-cooled gasoline engine, providing adjustable fluid flow rates and pressures of up to 6.0 gpm/150 psi and 10.0 gpm/300 psi respectively -- sufficient to de-ice all general aviation, corporate & charter aircraft. The standard carts range in capacity from 25 to 110 gallons. Each is equipped with an electric immersion heater to heat the de-icing fluid to a maximum of 160° F to help melt frost, snow & ice from your aircraft's surfaces. All carts include Honda 5.5 engine, 24" tow bar with pintel ring, high-pressure hose, adjustable pressure valve, pressure gauge, pistol grip handgun, and adjustable brass nozzle. Electric models come with 12v Self Containment kit.

10.0 gpm/300 psi respectively -- sufficient to de-ice all general aviation, corporate & charter aircraft. The standard carts range in capacity from 25 to 110 gallons. Each is equipped with an electric immersion heater to heat the de-icing fluid to a maximum of 160° F to help melt frost, snow & ice from your aircraft's surfaces. All carts include Honda 5.5 engine, 24" tow bar with pintel ring, high-pressure hose, adjustable pressure valve, pressure gauge, pistol grip handgun, and adjustable brass nozzle. Electric models come with 12v Self Containment kit.

Gas powered engines		
Description	Part No.	Price
40 Gallon 5.5 Hp gas Engine with 2500 watt heater.	12-02083	.
60 Gallon 5.5 HP gas engine with 2500 watt heater.	12-02084	.
Electric powered engine		
Description	Part No.	Price
25 Gallon 12 volt Electric Cart.	12-02085	.
40 Gallon 12 volt Electric Cart.	12-02086	.
60 Gallon 12 volt Electric Cart.	12-05533	.

NICHOLSON HACKSAW BLADES

Nicholson Bi-Metaloy hacksaw blades last twice as long as high-speed steel and 10 times longer than carbon steel. Can operate 20%-50% faster. Practically unbreakable.

GENERAL RECOMMENDATIONS FOR BLADE SELECTION

14 TOOTH – For cutting heavy cross section and for soft materials where maximum chip clearance is needed.....P/N 12-19514

18 TOOTH – For general shop use, where blade is used on several jobs.....P/N 12-19518

24 TOOTH – For cross sections of 1/16" to 1/4", such as pipe, angles, small drill rod.....P/N 12-19524

32 TOOTH – For cutting stock up to 1/16" thick, such as 4130 tubing, sheet metal, BX.....P/N 12-19532



NYLON FLANGES IN BATTERY BOX MODIFICATION KIT

Features: • Less expensive to modify the existing box than to replace it • Mod and Positive and Negative Cables are less costly than new braided straps • Compatible with our famous "Low Loss" Cable Kits • Nylon inserts guard against battery grounding or unwanted mishaps • Add positive and negative copper cables for additional charge
Benefits: • Improve Starting Performance • Easier Removal & Installation of Battery • May prolong life of battery and starter • Less expensive to modify existing box than to replace • Compatible with our famous "Low Loss" Cable Kits! • Eliminate extra connection on outside of the battery box • Do away with the troublesome braided negative strap.
Experimental.....P/N 11-02892



T BAR TOOL

Gone will be the loathsome task of removing inspection panels, fuel cell panels, wing root fairings to name a few! Enter T-BAR! By design, the tool is anchored to an existing nut-plate, then with leverage is able apply enough downward force to keep the hex bit firmly gripping the screw head, allowing the mech to back it out with confidence and ease...Your welcome!!

P/N 12-06475



THARPE LEVER

It is a scaled down Johnson bar that fits in an AOG bag (and your pocket!). Perfect for cramped spaces! 1/4" square drive with a socket for a 1/4" bit. Each lever now ships with a removable rubber screw and bit holder so you don't have a pocket full of FOD.

P/N 12-06467

CANNON PLUG STRAP WRENCH



Get in and get out without causing yourself more work! This 1/4" drive cannon plug strap wrench is useful when you need to remove a cannon plug or fitting in a tight spot. Break B-nut torque with a wrench and quickly run it on or off with this tool. Each tool ships with 12" of skydrol resistant nylon strap.

P/N 12-06469

AIRCRAFT DEICING STORAGE TANK

Heated Insulated Storage Tanks are appropriate for indoor use only to store your de-icing fluid with a heated insulated wrap preset to 140°F. These storage tanks use an electric pump to transfer the heated fluid from the storage tank right to your Aircraft Deicing cart at a rate of up to 12 GPM. All storage tanks are supplied complete including a heavy duty polyethylene tank, 3000w 240v immersion heater, heavy vinyl insulated wrap, transfer pump, temperature gauge and a high-pressure hose with a pistol-grip nozzle. **Tank:** • Capacity: 100 Gallons • Dimensions: 28in Diameter x 46in Height • Material: PolyethyleneP/N 12-05532

ATS HOSE FITTING ASSEMBLY TOOLS



Individual sizes: #3, #4, #5, #6, #8, #10, & #12. For use in assembling stratoflex series 300, aeroquip 303, 491 hose fittings. Chrome Plated.

Size	Part Number	Price
#3	12-05273	.
#4	12-05274	.
#5	12-05275	.
#6	05-26371	.
#8	12-05498	.
#10	12-05271	.
#12	12-05272	.

BATTERY TERMINAL TOOL



The Right Tool for the Job • Prevents damage to battery posts • Steel frame, fits battery wing nuts securely • Insulated to eliminate shorting, sparks or possible explosions • Foam grip handle eliminates slipping. • Great gift for pilot or mechanic.

P/N 12-16200

NO-SPARK ABS BATTERY TOOL



3D printed abs plastic with 3/8" drive for a socket wrench.

Dimensions - 3"x1"

Plastic is non-conductive so you can safely take off and on your battery terminals without a shower of sparks.

Throw it in your tool box or take it in the airplaneP/N 13-25146

ADEL CLAMP SCREW HOLDER



These handy little helpers hold Adel and P clamps closed so that you can install a ground strap or nut with a free hand. Insert this tool into the screw threads while compressing the clamp stack, install hardware, and a simple pull will release the clip for final torquing of the nut. Laser cut from .018" stainless steel for resilience, flexibility and corrosion resistance. Works on #6, #8, #10, and #12 screws. MADE IN USAP/N 12-06470



SCHRADER VALVE SERVICING EXTENSION SOCKET

This tool is the solution to service hard to reach Schrader valves, typical with many landing gear and accumulator configurations. Compatible with MS28889-2 and 9019C valves (3/4" jam nut) Bombardier, Gulfstream, Hawker, Cessna, Embraer, and more. Machined from 303 stainless steel this tool is capable of high-pressure servicing. Replacement packings are available in our store; Parker Hannifin P/N EM163 N1613-007.....P/N 12-06468



TOOLING BREWER WRENCH

Great for tight quarters and engine work. Don't disassemble more than you need to access a fastener deep in a confined area. They can also be bent without the need for a torch, or cut down to make thin dog bones.

From 1/4" to 11/16". 12 point box ends, with 1/4" or 3/8" drives at 2 locations for torquing. Drives are 1.5" and 6.5" from fastener center. Laser cut from 10 and 12 gauge polished stainless steel. MADE IN USA.
1/4"-5/16"P/N 12-06471

3/8"-7/16"P/N 12-06472

1/2"-9/16"P/N 12-06473

5/8"-11/16"P/N 12-06474

TO

ENGINE TOOLS

VALVE WOBBLE TEST FIXTURES



The Valve Wobble Test Fixture for parallel valve Lycoming engines is used to comply with Lycoming SB-388a. Quality made of aluminum and alloy steel, it is easy to use with no set screws or feeler gauges required. Allows direct reading of wobble from dial indicator. Note: Will work on a angle valve engine.

Fixture w/o indicator.....P/N 12-21500
Fixture with indicator.....P/N 12-21505

DISTRIBUTOR BLOCK SPRING INSTALLATION TOOL



This tool facilitates the proper installation of contact springs on Bendix magnetos. The O-ring locator ring assures proper location of the tool in the contact tower. Features knurled body grip and ball plunger grip. Made of alloy steel.....P/N 12-21510

VALVE SPRING COMPRESSOR



This tool is used to compress valve springs during valve removal and installation. It is ergonomically designed for shop and field use and comes with special pivot pin. Features alloy steel construction with nickel plating.....P/N 12-00202

VALVE LASH ADJUSTING TOOL



This tool greatly reduces the time required to adjust valves and improves the accuracy of the adjusting operation. Used on Lycoming O 235 and O 290 series engines. Quality constructed of alloy and toolsteel.

P/N 12-21550

PROPELLER SHAFT OIL SEAL INSTALLER



Installs one piece stretch seals without damaging surface on seal or crankshaft. For all flange shafts per Continental Bulletin M-70-2. Also fits Lycoming. For installing one piece stretch seals without damaging surface on seal or crankshaft. 1 lbs (0.5Kg) shipping weight.

P/N 12-04566

VALVE SPRING COMPRESSION TOOL



Genuine Briggs & Stratton tool used on the L-Head series engines to remove and re-install the valve spring retainer.

P/N 08-17411

ROCKER ARM SHAFT REMOVAL TOOL



These simply bolt to the head and the knurled knob screws down to compress the valve spring allowing the shaft to be slid out with no spring pressure.

P/N 12-03227

THROTTLE SHAFT BUTTERFLY SCREW STAKING TOOL



This quality made alloy steel tool facilitates the proper staking of throttle shaft butterfly screws and eliminates the possibility of damaging the carburetor during staking. The tool can easily be operated by one person on the bench without chisels, special fixturing or hammers. All wear components are easily replaceable for long service life.....P/N 12-21528 /ea.

BUNG NUT DRUM WRENCH



Non-Sparking Aluminum Bung Nut Wrench: Use to install or remove large and small drum plugs and install faucets. Accommodates most common bungs also, tightens or loosens drum rings.

P/N 08-07615

PARAFLEX TOOLS 1/4 INCH DRIVE RATCHET



This ratchet allows the user to manipulate the head angle while in the act of positioning without having to guess what angle is appropriate for the job. The ease of movement can be adjusted by tightening or loosening the thumb screw in the end of the handle. You

also have knowledge of the head position at all times since the head & handle are always parallel. This is a tremendous advantage when line of sight is obstructed. Approximately 11 in./27.9cm long. Weight: 12 oz./340g. Packed individually

P/N 12-06986

SAFETY MAGNETO LOCK TOOL



This handy tool fits most Bendix magnetos and prevents damage to distributor gear teeth brought about by accidental turning of the engine during magneto installation. Use for E gap or engine timing. Body taper locks into timing window. Polyurethane rubber throughout.

P/N 12-21535

ATS MAG LOCK TOOL



Holds Timing Gears When Removed. Works with all bendix magnetos. 1 lb (0.5Kg) shipping weight.

P/N 12-05509

LYCOMING TIMING POINTER



This tool is used to align timing numbers and marks to the crankcase parting line on Lycoming engines. It permits timing from the marks on the aft side of the flywheel. A spring clip holds the tool to the flywheel.

P/N 12-21540

CONTINENTAL O-200 TIMING POINTER



This tool is used to align timing numbers and marks to the crankcase parting line on the Continental O-200 engine. It is held to the propeller flange with magnets, and eliminates the need for all other timing angle devices and TDC indicators. Quality made from delrin and tool steel. Greatly simplifies the timing of new magnetos and periodic timing checks.

P/N 12-21545

ALTERNATOR DRIVE COUPLING TOOL KIT



Alternator Drive Coupling Tool Kit: Designed for proper installation, removal and testing of alternator drive couplings found on many Continental Aerospace Technologies piston engines.

Alternator Coupling Tools are purpose-built to make it easy for mechanics to inspect this critical component and simplify coupling installation and removal. The tool kit consists of a zinc-coated coupling spanner wrench and unique coupling gear socket with steel housing and aluminum gear engagement, designed to protect the steel coupling gear from damage during maintenance. Together, these tools allow the coupling to be held in place (mounted on the alternator or free-standing) while the coupling gear slippage is checked with a calibrated 3/8" torque wrench (as specified in the engine maintenance manual).

For IO520 & 550 Engines.....P/N 08-17288
For Continental C-75/85/90/115/125/145, E-165/185/225, O-200/300, IO-240/360 series engines, in addition to Continental O-520/550 series engines.....P/N 08-17440

ENGINE OVERHAUL STAND



This bolt together Engine Overhaul Stand, ideal for actual overhaul of engines. Constructed of heavy duty steel, it features three legs which allow it to sit level on uneven floors. Predrilled adapter for Continental & Lycoming engines. Sturdy tripod design. Assembles in minutes with a 1/2" wrench. Assembled dimensions: 24" (61cm) high, 36" (91cm)

distance between legs. Includes a set of locking casters for easy mobility. Supports up to 1200 lbs (545 Kg) (static tested to 2500 lbs (1136 Kg). Includes Adapter for Continental and Lycoming engines. MADE IN USA. Overhaul Stand.....P/N 12-21555
Wheel Set for Stand.....P/N 12-00919

ENGINE OVERHAUL STAND MOUNTING PLATE FOR LYCOMING / CONTINENTAL



Steel engine overhaul stand mount adapter plate Lycoming & Continental. Cato steel engine overhaul stand adapter plate can be used to build or adapt your own engine stand. Constructed of heavy duty 1/4 inch steel plate for ease of welding. 100% laser cut adapter plate for both Continental & Lycoming engines. Made in USA.

P/N 13-26075

CONTINENTAL ENGINE MAG TIMING TOOL



Aluminum CNC tool manufactured in Alaska for simple and perfect magneto timing. Simply position engine on #1 TDC compression stroke. Lube grommets. Put this tool on the top two propeller nuts and sight down top case halves to see exact mag timing. Now there's no need for propeller protractor cones!

TCM: 470 / 520 / 550.....P/N 12-02817
C-85F / C-90 / O-200.....P/N 12-05514
O-300: A / B / C.....P/N 12-05515

AEROTAR LYCOMING ST-289 INTAKE PIPE SWAGING TOOL



Aerotar Lycoming ST-289 Intake Pipe Swaging Tool.....P/N 12-05310

LYCOMING VALVE SPRING COMPRESSOR



This cast aluminum alloy valve spring compressor fits Lycoming parallel valve and angle valve horizontally opposed engines. An excellent tool at an economical priceP/N 12-21520

LYCOMING TAPPET GAUGE



Similar to Lycoming Gauge ST23, this tappet gauge is Rockwell hardened to 48-52 and precision ground to .028 and .080. This gauge is a must for professional aircraft mechanics.....P/N 12-00918

EAR ISLAND REMOVAL TOOL



When substantial quantities of material have to be removed from the exhaust port, it may be necessary to also remove the island around the exhaust stud area. The ear island removal tool and pilot can be used to accomplish this without the use of power toolsP/N 12-17608

MAGNETIC SHEET METAL CLAMPS



Great general purpose discs. They are excellent for arts and crafts applications that require a strong, thin disc. Just 1/16" thick, but still a sturdy disc. They are an excellent choice for magnetic therapy. The D81 is deceptively strong for it's size.

P/N 12-05104

HANDY BEARING PACKER



Quickly Flushes Out Old Grease and Repacks Bearings with Less Mess. The Handy Packer works on bearings up to 3 1/2" O.D. The grease stays in the tool cavity, not on your hands. To pack a bearing, place the bearing on the piston. Press down on the cap until the old grease is forced out and the new grease shows on top of the bearing.

P/N 12-02578

MAGNETIC FINGER TOOL



This snug and stretchy glove slips on your finger and turns it into a professional tool. The powerful magnet at your fingertip allows you to hold and retrieve any small metal object with precise control. Use it to easily start a variety of fasteners in tight-fitting or difficult to reach places. At work. At home. Anytime your finger needs a magnetic grip on things.....P/N 12-04565

HEAVY-DUTY BI-METAL HOLE SAWS



Milwaukee hole saws provide an economic all means of extending the useful range of portable drills, drill presses and lathes. High speed cutting edges welded to steel bodies produce clean, accurate holes All hole saws listed cut to standard 1.25" depth. Order appropriate arbor for use with each size hole saw.

Hole Dia.	Part No.	Use w/Arbor No.	Price
5/8"	49-56-0620	12-01993	.
3/4"	12-02001	"	.
7/8"	12-01992	"	.
1"	49-56-1000	"	.
1-1/8"	12-01991	"	.
1-3/16"	49-56-1180	"	.
1-1/4"	49-56-1250	49-56-7055	.
1-3/8"	49-56-1370	"	.
1-1/2"	12-01990	"	.
1-5/8"	49-56-1620	"	.
1-3/4"	49-56-1750	"	.
2"	49-56-2000	"	.
2-1/4"	49-56-2250	"	.
3-1/8"	49-56-3120	"	.

HEAVY-DUTY SHOE SAW ARBORS



QUICK CHANGE ARBOR - Use for hole saw sizes 1-1/4" and larger. The Quick Change 7/16" shank prevents slipping in chuck. Pin drive construction permits fast interchanging of hole saws without removing arbor from chuck. Pilot drill size 1/4".

P/N 49-56-7055

NUT PLATE DRILL JIGS



Nut Plate Drill Jigs are designed to facilitate accurate rivet hole drilling for standard plate nuts. Nut Plate Drill Jigs are known as Anchor Nuts Or Nut Plates. Hand-held Nut Plate Drill Jigs are manufactured to precise tolerances and include drill bushings to reduce wear and assure consistent hole-spacing. Every Nut Plate Drill Jig features an ergonomically designed handle with a flexible stainless spring blade, allowing for clearance while the jig is in use.

SINGLE LUG PLATE NUT DRILL JIGS

Nut Thread Reference	(C) Hole Spacing	(P) Pilot Diameter	(K) Drill Size	Part No.	Price
6-32	.344	.1390	#40	12-04781	.
8-32	.344	.1640	#40	12-04783	.
10-32	.344	.1910	#40	12-04784	.
1/4-28	.344	.2480	#40	12-04785	.

SINGLE MINI LUG PLATE NUT DRILL JIGS

Nut Thread Reference	(C) Hole Spacing	(P) Pilot Diameter	(K) Drill Size	Part No.	Price
6-32	0.218	0.1660	#40	12-04786	.
8-32	0.234	0.1930	#40	12-04787	.
10-32	0.250	0.2180	#40	12-04788	.
1/4-28	0.281	0.2810	#40	12-04789	.

TWO-LUG PLATE NUT DRILL JIGS

Nut Thread Ref	(C) Hole Spacing	(P) Pilot Dia	(J) Hole Spacing	(K) Drill Size	Part No.	Price
6-28	0.344	0.688	0.1390	#40	12-04790	.
8-32	0.344	0.688	0.1640	#40	12-04791	.
10-32	0.344	0.688	0.1910	#40	12-04792	.
1/4-28	0.344	1.000	0.2480	#40	12-04793	.

TWO-LUG MINI PLATE NUT DRILL JIGS

Nut Thread Ref	(C) Hole Spacing	(P) Pilot Dia	(J) Hole Spacing	(K) Drill Size	Part No.	Price
6-32	0.2180	0.4360	0.1390	#40	12-04794	.
8-32	0.2340	0.4680	0.1640	#40	12-04795	.
10-32	0.2500	0.5000	0.1910	#40	12-04796	.

CORNER LUG PLATE NUT DRILL JIGS

Nut Thread Ref	(C) Hole Spacing	(P) Pilot Dia	(J) Hole Spacing	(K) Drill Size	Part No.	Price
8-32	0.344	0.486	0.1640	#40	12-04797	.
10-32	0.344	0.486	0.1910	#40	12-04798	.
1/4-28	0.500	0.707	0.2480	#40	12-04799	.

MECHANICS EYEBALL DRILL JIG



The eyeball drill jig was designed to help eliminate time consuming manual layout of the holes for the firewall eyeball. It's a great accessory! The drill sequence is started with the center hole for the eyeball, drilling a #30 hole. Once this hole is drilled, a #30 cleco is placed in the center hole. Next, drill all of the perimeter holes with the drill jig and remove the #30 cleco. Take the drill jig off, and increase the center hole to the size of the eyeball.P/N 12-04593

SCREWGRAB ANTI-SLIP GEL FOR STRIPPED SCREWS



Helps remove or tighten all types of fasteners - damaged or rusted. A single dab of ScrewGrab creates a positive grip between metal surfaces (tests have shown as high as 800%), that virtually eliminates tool wear or rounding and deforming of fasteners • Not a glue • Works instantly • Wipes clean after use • Non-corrosive.....P/N 12-04568

ENGINE TOOLS



S4-1 RACE REMOVAL TOOL

A & P mechanics will find this S4 outer bearing race removal tool to be very effective and well priced. Hemispheres held together by the "O" ring are inserted together behind the bearing race. The pilot is then inserted to expand and lock the halves & push out the race. You'll like its simplicity and ease of use.....P/N 12-17601



S4-2 RACE REMOVAL TOOL

The S4 magneto drive end inner race removal tool works in conjunction with a standard bearing puller. The split gripper ring fits behind and around the race and is captured in the puller ring by 2 opposing set screws. A groove on the puller ring provides the point of attachment for the puller arms. P/N 12-17602



S4-3 RACE REMOVAL TOOL

The S4 magneto seal installation, inner and outer race installation tool is three tools in one and is proportioned in such a way that it is easily accommodated by most small bench arbor presses. P/N 12-17603



MAGNETO ROTOR BEARING SETTING GAUGE

Determines condition of excess bearing clearance and allows for precise adjustment of new bearings to prevent over or under preload. Available with or without dial indicator. Choice of 3/8-16 or 3/8- 24 threaded shaft fittings.

Kit Description	Thread	Part No.	Price
Setting Gauge & Ind.	3/8-16	12-17801	.
Setting Gauge & Ind.	3/8-24	12-17802	.
Setting Gauge & Ind.	Both	12-17803	.
Setting Gauge, No Ind.	3/8-16	12-17901	.
Setting Gauge, No Ind.	3/8-24	12-17902	.

THROTTLE SHAFTBUSHING KNOCKOUT

The throttle shaft bushing removal tool is very competitively priced and will help you avoid a jury-rigged operation that could damage an expensive carburetor body. Now there is no reason not to have one. They are available and affordable..... P/N 12-17400.....



COMPASS ADJUSTING TOOL



The compass screwdriver is a great little tool that is totally non-magnetic, but also overcomes the shortcomings of solid brass or aluminum tools. This tool has a nice hex aluminum handle and a stainless steel driver insert. No need to worry about damaging the tip on a frozen compensator screw, and you can also remove the cover plate screws with the same tool. P/N 12-17300

ENGINE TOOL TRAY



The engine tool tray is designed for aviation enthusiasts who do maintenance on their own aircraft, as well as full time mechanics. This tool tray sits on top of the push rod tubes and is protected by rubber trim on the bottom to eliminate any damage to the aircraft engine. Instead of dropping a screwdriver or a nut down between cylinder baffling, this tool tray will give the mechanic great organization. It allows for spark plug placement, tool placement, as well as all of those pesky nuts and bolts.....P/N 12-04592



ATS PISTON RING COMPRESSOR KIT

The ATS Piston Ring Compressor features a quick-change design to speed up piston ring installation. It includes the famous Hastings Ring-O-Matic® pliers and bands that operate in all positions: not just vertically or horizontally. The pliers incorporate a precision locking action for exact holding and quick release. Complete kit includes the Ring-O-Matic® pliers and one of each of the following size bands: 3-7/8" to 4-1/8", 4-1/8" to 4-1/2", 4-1/2" to 4-3/4", 4-3/4" to 5", 5" to 5-1/4", & 5-1/4" to 5-3/4"

Description	Part No.	Price
Kit	12-03154	.
Compressor Pliers	12-03155	.
Piston Ring Compressor Band 3-7/8"TO 4-1/8"	12-03156	.
Piston Ring Compressor Band 4-1/8"TO 4-1/2"	12-03157	.
Piston Ring Compressor Band 4-1/2"TO 4-3/4"	12-03158	.
Piston Ring Compressor Band 4-3/4"TO 5"	12-03159	.
Piston Ring Compressor Band 5"TO 5-1/4"	12-03160	.
Piston Ring Compressor Band 5-1/4"TO 5-3/4"	12-03161	.



PISTON RING COMPRESSOR SET

The most efficient, versatile and dependable tool of its kind on the market. Designed to operate both vertically and horizontally. Fine-tooth ratcheting lock permits bands to be contracted in extremely small increments. Positive lock insures a free hand. Eliminates broken rings during installation. Set includes compressor pliers and the two bands (1123, 1125).

Part No.	Size	Engine Application
1123	3-7/8" to 4-1/8"	Cont. A-65, C-85, C-90, 0-200, 0-300
1125	4-3/8" to 4-5/8"	Cont. E-225, IO-470

Set.....P/N 12-10900

Individual Band # 1125 for 4-3/8".....P/N 1125

CYLINDER BASE NUT WRENCHES (CONTINENTAL)



Made of top quality tool steel. 12 Point with 1/2" square drive, 13" long. Set of 4P/N 12-11200

or order individual wrenches below.

LYCOMING & CONTINENTAL CYLINDER BASE NUT WRENCHES

Wrench Part #	Size	Engine Application	Price
2882	9/16" Hex	C-85, 0-200, 0-300, G0-300, E-185, E-225, 0 & IO-470, IO-360, IO-520	.
2882-2	1/2" Hex	A-65, C-85, 0-200, 0-300, G0-300, E-185, E-225, IO-360	.
2882-3	5/8" Hex	A-65, 0-470, IO-520	.
2882-4	3/4" Hex	No longer used on Cont.; Used on Lyc. 0-390D, D2 and all wide deck Lyc engines	.

CYLINDER BASE NUT WRENCHES



- For lycoming engines
- For socket type nuts (internal wrenching)
- Standard 1/2" square female drive end
- Made from alloy steel forgings, heat-treated for maximum toughness.

1/2" Allen Head HexP/N 64942

3/8" Allen Head HexP/N 64943

Set of bothP/N 12-04722



ATS LYCOMING AND CONTINENTAL CYLINDER BASE NUT WRENCHES

The ATS 3882-series Cylinder Base Nut Wrenches are made from forged alloy steel, tempered, and hardened for maximum strength.

Description	Part No.	Price	Description	Part No.	Price
ATS 3882 9/16	12-04977	.	ATS 3882 5/8	12-04976	.
ATS 3882 1/2	12-04975	.	ATS 3882 3/4	12-04978	.



WASHER WRENCH SET

Washer Wrench Set. This is a (4) piece washer wrench set. It's used to hold AN/ aircraft washers to reach into hard to reach areas.....P/N 12-04723

SPECIALTY TOOLS

ULLMAN MAGNETIC PICK-UP TOOLS



HT-2

HT-1

These Ullman pick-up tools with Powercap offer a unique combination of features which make them ideal for work around aircraft. The stainless steel telescoping handle is strong, long, and lightweight, and the comfortable, textured cushion grip keeps handle secure even in wet or oily hands. The head features a compact industrial strength magnet for retrieving heavy objects in tight places. The powercap shields magnet side so that the head can be easily guided past ferrous metal objects. Available in 3 convenient sizes.

HT-1 lifts 1-1/2 lbs, over 2 lbs with POWERCAP™ telescopes from 6-5/8" to 33-1/4" P/N 12-21385

HT-2 lifts 3-1/2 lbs, over 5 lbs with POWERCAP™ telescopes from 6-5/8" to 33-1/4" P/N 12-21386



CHP4-L HOOK & PICK SET

has picks that are 9.75" long with textured cushion grips. These longer picks are ideal for working in hard to reach awkward areas.

P/N 12-00716




GMC-2 DUAL PURPOSE TOOL

contains a MegaMag Pickup Tool that lifts 16 lbs. and a 2.25" Inspection Mirror with a metal base that mounts in seconds and brings hidden areas into full view.

P/N 12-00718

EXHAUST PORT RESURFACING TOOL

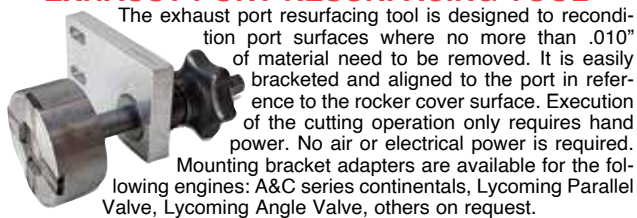

The exhaust port resurfacing tool is designed to recondition port surfaces where no more than .010" of material need to be removed. It is easily bracketed and aligned to the port in reference to the rocker cover surface. Execution of the cutting operation only requires hand power. No air or electrical power is required.

Mounting bracket adapters are available for the following engines: A&C series Continentals, Lycoming Parallel Valve, Lycoming Angle Valve, others on request.

Bracket

Cutter Head Inserts

Lycoming Angle Valve
P/N 12-17611

P/N 12-17607



EAR ISLAND REMOVAL TOOL - When substantial quantities of material have to be removed from the exhaust port, it may be necessary to also remove the island around the exhaust stud area. The ear island removal tool and pilot can be used to accomplish this without the use of power tools.

P/N 12-17608



THE CORE RECESSOR

The core recessor is a new product with the purpose of serving as an efficient tool that makes the process of removing core cells in Nordam Panels and composite fiberglass more efficiently. Thus, it reduces time for edge fillers, which are necessary procedures to customize aircraft cabinets, floorboard, vanity's headliners,

valance panels, etc. Is light weight, easy and safe to use. Core panels from 1/8 to 3/4 inch with no adjusting. Requires no electricity.

Core Recessor P/N 12-02270

Core Recessor Mini P/N 12-02271



UNI-MAG WRIST BAND MAGNET

Uni-Mag is a wrist worn magnet that allows craftsmen to keep parts close to hand while working rather than in your pocket, on a ladder, or in your mouth. It holds nuts, bolts, screws, nails, tools, etc. A specially created magnetic field allows parts to lay flat on the face of Uni-Mag rather than upright. Save time and put an end to fumbling for small hardware with Uni-Mag. Comes complete with magnet and wrist-band..... P/N 12-30110



SUPER HANDY MAGNETIC RETRIEVAL TOOL ST-225

The Super Handy Magnetic Retrieval Tool extends 26" and picks up five pounds.

P/N 12-02932

AMAZING ROD SAW



Tiny particles of tungsten carbide, one of the toughest and hardest substances in the world, have been bonded to a steel rod to produce the Rod Saw. Fits standard 12" hacksaw frame. Use when regular hacksaw will not work. Lets you cut steel, rock. Not recommended for soft materials. P/N 12-01180



HANDEE CLAMP

This innovative tool solves the problem of that out of reach grasp. Have you ever been working on a job where you needed to put a clamp, nut, or bolt on something that was just out of reach of your fingers or another bulky tool? The Handee Clamp makes that job easy. Simply put that nut, clamp, or bolt on one end and then tighten the nut on the other end to secure. Designed to firmly hold nuts, bolts, and clamps in its easily adjustable jaws, the Handee Clamp acts as a small, versatile vise grip enabling you to focus on the job at hand. You won't have to worry about dropping that nut or bolt into that pesky floor drain ever again, or fight with that hose clamp as you work on that transmission line. From a professional auto or aviation mechanic, to a do-it-yourselfer that always has a project on deck in your garage at home, you need this tool in your inventory.

P/N 13-20594



HIGH CAPACITY EXHAUST DESICCATOR

2.5 times the desiccant capacity of previous design. One piece construction allows the dessicant to be contained in the core of the plug. Made of durable high quality urethane rubber that will last almost indefinitely

P/N 12-01057/ea



GOLDENROD DEHUMIDIFIER

This compact, low-voltage dehumidifier is an ideal way to eliminate dampness and mildew in aircraft which can cause mildew growth in carpet and upholstery and wreak havoc with electrical systems. In stall under the instrument panel or on the deck between seats. If installed in the engine compartment, Goldenrod will eliminate moisture which leads to rust, keep ignition wiring dry, and facilitate cold weather starts. In the hangar, Goldenrod can protect parts, tools, supplies, and components. Operates on standard 110V current 24 hours per day but uses four times less power than a standard light bulb. Safe and effective. Available in four lengths.

Part No.	Length	Watts	Approx. Coverage Up To	Price Ea.
12-30225	12"	8	100 cubic feet	.
12-30230	18"	12	200 cubic feet	.
12-30240	36"	25	500 cubic feet	.



EVA-DRY® HIGH CAPACITY DRY DEHUMIDIFIER

Designed to absorb moisture from small enclosed areas. It will help protect clothes and valuables from the damaging effects of mold/mildew and moisture rot. It is 100% renewable and needs no power to operate. Place the Eva-Dry unit in a closet or any small, enclosed space, and it will start to absorb moisture immediately. There is an indicator window with special "Color Changing Crystals" that change from orange (when dry) to green (when wet) to indicate when the unit needs to be "renewed". The unit will absorb approx. 6-8 ounces of moisture (depending on humidity levels this should take approx. 4-8 weeks). Once the moisture has been absorbed it cannot leak or spill. This unit uses a specially engineered, crystallized silica gel that is odorless, non-toxic, Eco-Friendly and completely safe. P/N 12-01621

TO

WING STAND



This wing stand is ideal for aircraft homebuilders or restorers needing to safely store and protect aircraft wings during the project. It accommodates virtually all shapes and sizes of wings and is available at a very economical price. We ship this wing stand direct to you from the factory (freight collect). Dims: 72"l x 44"h x 36"w. Assembly req. Each stand holds 2 wings.

P/N 12-21390/ea

TENNSMITH HAND BRAKE AND STAND



Versatile, economical hand brake designed for straight forming of mild steel in thicknesses of 22 gauge & lighter. Made in the U.S.A by Tennsmith. Bends material up to 48" wide. Wts: brake: 280 lbs. Optional stand: 95 lbs. Ideal for bending materials used in light aircraft construction. Shipped direct to you from factory in Tennessee.

Model S48-22 hand brake

P/N 12-20700.....

Optional Stand

P/N 12-20705.....

UNIVERSAL HAND BRAKE & STAND



Tennsmith's heavy duty universal hand brake is a great tool for a wide range of sheet metal bending and forming operations in 12 gauge and lighter mild steel. The brake is ideal for both box and pan and straight bending in hot and cold rolled plate, stainless steel, aluminum, and heavy plastic. Welded steel plate construction for strength

and rigidity. Bends material up to 48" wide Wts: brake: 1330 lbs. Optional stand: 95 lbs. Shipped truck collect direct to you from factory in Tennessee.

Model HBU48-12 Hand Brake.....P/N 12-20710.....

Optional Stand.....P/N 12-20705.....

TENNSMITH FOOT SQUARING SHEAR



Tennsmith squaring shears offer precision shearing and rugged construction. These shears feature traction, ground alloy tool steel blades to prevent material movement during shearing. Will shear material up to 16 gauge mild steel and up to 20 gauge stainless steel. Both blades are adjustable and back gauge gives highly accurate readings. Wts: Model 36: 700 lbs.

Model 53: 950 lbs. Shipped truck collect to you direct from factory in Tennessee.

Model 36 Shear (Max. Cutting Width 37")...P/N 12-20715..... Model 52

(Max. Cutting Width 52").....P/N 12-20720

TENNSMITH -These products are shipped truck, priced F.O.B. McMinnville,TN. Allow 4-6 weeks for delivery

SEAT TRACK CLEANER



Maintaining adjustable cockpit seats, or passenger seating secured in notched tracks, requires removing the dirt and grit that have become embedded in the tracks.

Rex-Cut Products has developed a thin-profile mounted wheel specially designed to accomplish this job efficiently and safely. The seat track cleaners are manufactured using layers of reinforced nonwoven cotton fiber and abrasive grain which are bonded into discs. When mounted on a die grinder they are able to fit inside the seat tracks. Designed for cleaning all the interior surfaces of the track without having to change discs, one disc will remove caked on sludge, dirt and grit while removing minor burrs and rough edges. The seat track cleaners are non-loading on aluminum and leave superior surface finishes. Available in 54 and 80 grits in aluminum oxide grain mounted on a 1/4 x 1/2" shank.

54 Grit Seat Track CleanerP/N 12-00955

80 Grit Seat Track CleanerP/N 12-00952

AN BOLT LENGTH GAUGE SET



Effortless Bolt Sizing: Our AN Bolt Length Gauge simplifies the process of identifying AN bolt lengths, making it a breeze for both professionals and hobbyists. Say goodbye to tedious measuring with calipers or rulers. Wide Range of Bolt Sizes: This versatile tool covers a broad spectrum of bolt sizes, from 3 to 50, ensuring you have the perfect solution for any project. No more second-guessing or wasting time searching for the right bolt length. Precision and Accuracy:

Engineered for accuracy, our gauge guarantees precise measurements every time. You can trust the results it provides, reducing errors and improving the quality of your work.....P/N 12-06312

SLIDE HAMMER



Blue vinyl hand grip over steel handle reduces sting on technicians hands and provides 100% grip. 3 lb. slide weight is mounted on 1/2" plated steel shaft. Broached hex in nose cone locks pulling screw in place...ends breakage. Supplied with two hardened pulling screws and "L" puller hook fabricated of aircraft quality steel. Nose cone and shaft threads are 1/2" - 20.....P/N 15-08252

MACHINIST HOOK SCRIBE



Machinist Hook Scribe New. 2-point scribe has hardened, ground steel points. Features a straight point and a 90 degree point. Length: 9".

P/N 12-02896

PIG TAIL HOOK SCRIBE



Both the 45 degree and pig tail points of the scribe are made of hardened, ground steel. Both ends of the tool unscrew from the body.

P/N 12-02897

WOOD HANDLE TOOTHBRUSH STYLE CLEANING BRUSH



Three rows of bristles by seven, your choice of materials, with bent wood handle approx 7 3/4 inches long. An especially popular welders tool, but very suitable for a variety of cleaning applications. Use stainless steel for maximum abrasive action, brass for less scratching. SW version stainless bristles are wire laced for positive retention.

P/N 04-02647

CLEANING TUBE BRUSH 3/16 X 6.25 INCHES



Tube brushes (also known as cylinder brushes) are filled with Dupont Tynex nylon and have excellent wear resistance. Although more susceptible to strong solvents than bristle filled brushes, nylon is stiffer, wears longer and cleans easier. This cylinder brush is perfect for manually cleaning internal surfaces such as tubes or threaded holes. Handle is made of twisted steel wire.

P/N 09-04587

SPECIALTY TOOLS



SWISS PATTERN NEEDLE FILE SET

Swiss Pattern Needle File Sets have been designed to meet the needs of hobbyists, craftsmen, tool makers and jewelers. Every file is made from alloy steel and machined into distinctive shapes for various small scale and finishing applications. Also included is a 700 series Versa-Grip handle with a locking screw chuck.

P/N 12-03351



STRIPMASTER WIRE STRIPPER

Stripmaster wire Stripper #16 to #26 AWG. Knife-type blades Cleanly strips wire up to 7/8 in. (22mm). One-third less hand pressure for each strip. Eliminates nicking, cutting, and fraying of wire. Wire gripper holds wire centered in hole.

P/N 12-03714



IDEAL COAXIAL STRIPPER

3-step coaxial stripper. Adjustable coaxial wire stripper. For popular dual crimp BNC and TNC connectors. Strips braid 0.240 inch (6mm) and dielectric 0.240 inch (6mm). Replacement cassettes available.

P/N 12-03716



SCREW PAINT CUTTERS

For AN4 Screws. You know how frustrating it can be to remove a painted over screw only to wind up chipping up the paint job. But you wouldn't have that problem if you had a set of these innovative paint cutters. They work

by slicing through the paint around the head of the screw so you can remove it without chipping the paint. They have a 1/4x28 thread to fit into any angle drill or you can get the optional arbor (p/n 12-02460) for use in a drill chuck. Does not work on dome head rivets. 1 lbs (0.5Kg) shipping weight.

Size	Part No.	Price	Size	Part No.	Price
AN4	12-02452	.	AN6	12-02453	.
AN8	12-02454	.	AN10	12-02456	.
1/4"	12-02459	.	6 pc. Set	12-02461	.



PAINT CUTTER ARBOR

ArborP/N 12-02460



INSTRUMENT MOUNTING HOLE DRILL JIG

Aircraft instrument mounting hole drill jig for standard 2-1/4" & 3-1/8" diameter instruments. Accurate and simple tool to use, drill jig made of hardened steel for long life.

P/N 12-00975



NSL DISPENSER RETRACTABLE RETAINER

The B&O model HP-SK/100 and HP-SKA/100 is a sealant gun manufactured for the use of Semco and Techcon cartridges. Designed with a lightweight, retractable holder system, the HP-SK/100 and HP-SKA/100 does away with the standard steel tubed cartridge holders and can be used with or without the retainer.

This unique system only requires one cartridge holder to hold 2.5 oz, 5 oz, 6 oz, 8 oz and 12 oz cartridges. It is engineered for smooth dispensing, and the holder is designed to provide a full view of the cartridge, allowing the user to see the level of fluid inside the dispenser at all times. Manual Dispenser w/Retractable Retainer.....P/N 09-06036



NSL SEALANT MIXER HEAD

Chuck the 1/4" shank of this tool into your drill and easily mix SEMKIT Sealant Tubes, the flat end has the 2 connectors that fit into the sealant cartridge spinner, with the long narrow hexagonal piece having capabilities to be attached to a drill .P/N 09-06059

ERCOUPE 3 STONE ROTARY CYLINDER HONE KIT



This 3 Stone Rotary Cylinder Kit makes available an effective tool to recondition the interior running surface of the oleo cylinder barrel, and is intended to be used each time the MLG oleo struts are disassembled for routine seal replacement or when upgrading to the popular Main Landing Gear Oleo Restoration Kit (STC SA01247CH).

The clean and resurfaced interior cylinder bore results in increased seal effectiveness and service life and can be accomplished with or without removing the Taxi Stack end fitting and Donuts.

This kit is applicable to Ercoupe 415-C, CD, D, E, G, F-1, F-1A, Alon A2, A2-A and early M10 aircraft that are equipped with either the Hayes welded or Erco forged trailing link MLG assemblies that incorporate liquid filled oleo struts.P/N 12-05513

MILWAUKEE M12 SOLDERING IRON KIT



The M12™ Soldering Iron delivers fast application speeds by reaching operational temperature in under 18 seconds and maintaining an optimized temperature throughout the most demanding applications.

The heat indicator utilizes REDLINK™ INTELLIGENCE to notify users when the tool is ready-to-use and safe-to-store, eliminating the guesswork. The 3-stop pivoting head provides unmatched access by allowing users the ability to adapt

the tool for the application and solder in more confined spaces. The M12™ Soldering Iron powered by REDLITHIUM™ battery technology delivers up to 40 minutes of run-time on a M12™ Compact Battery Pack.....P/N 12-05737



PIPEMASTER WELDER'S TOOL FOR CONTOUR FITS

Pipemaster gives aircraft builders the ability to cut a piece of tubing on both ends and have it fit its intended location on the first try. Tedious hours of grinding and misfit joints can be eliminated producing exact welds and stronger airframes. Features spring temper stainless steel pins, aluminum inner shell, and rugged ABS housing. Simply slip over pipe, push down, transfer and cut, and the tubing is ready to weld. Pipemaster transfers the exact outline of the pipe joint in just seconds. Use for penetration cuts as well.

Part No.	Tubing O.D.	Price	Part No.	Tubing O.D.	Price
12-00102	3/4"	.	12-00109	1-1/2"	.
12-00103	7/8"	.	12-00111	1-5/8"	.
12-00104	1"	.	12-00112	1-3/4"	.
12-00105	1-1/8"	.	12-00113	1-7/8"	.
12-00106	1-1/4"	.	12-00114	2"	.
12-00107	1-5/16"	.	12-00116	2-3/8"	.
12-00108	1-3/8"	.			

MAGNETIZER / DEMAGNETIZER



This versatile tool saves you time and trouble by instantly magnetizing or demagnetizing you tools & parts on the job. Reliable, powerful permanent magnets for a super long life, and its compact size, shatterproof plastic shell, this tool will fit easily in your tool box. This tool allows easy, precise handling of small steel parts in confined spaces, collects metal items from inaccessible places, leaves 1 hand free for positioning the work piece, demagnetizes instruments & electronics components. Size: 2.1"x2"x1.1". Wt. .22 lb.....P/N 12-16835

TO

SANDERS - SURFACE TREATMENT KITS

3M™ ELITE PNEUMATIC ORBITAL SANDER



Features an alloy steel curved-throttle lever with built-in wrist support. 3M gripping material molded into the interchangeable comfort grip conveniently located speed control dial and internal muffler. Precision Balanced for Smooth Operation Meet or exceed highest performance standards Optimize to work with 3M abrasives. Multiple grips sizes available for improved operator comfort.

P/N 05-11839

3M™ ORBITAL SANDERS



The all new line of 3M™ air-powered finishing tools includes innovations designed to optimize performance and productivity. 3M™ Tools are designed for smooth operation, and are packed with horsepower. Multiple grip sizes are designed to provide advanced operator comfort, and color-coded levers allow for easy orbit identification.

The 3M's NEW dust management system featuring Clean Sanding Abrasives and Accessories is revolutionizing the dust evacuation process. Discs are designed to cut more and last longer. The patented multi-hole pattern captures and remove more dust compared to 5- or 6-hole products.



Model	Tool Dia. Inch (mm)	Vacuum	Orbit Dia. Inch	Max RPM	Motor HP (W)	Airflow Rate SCFM (LPM)	Part No.	Price
20319	5"(127)	Yes	3/16"	12,000	.28(209)	17(481)	05-03483	.
20317	5"(127)	No	3/16"	12,000	.28(209)	17(481)	05-03484	.

P-KIT AIRCRAFT WINDOW INSPECTION PRISM KIT



The "P-KIT" (Inspection Prism Kit) is packaged as a completely self contained aircraft window inspection tool kit. It comes in a water-proof lockable case and includes Instructions, Inspection Prism, Coupling Agent and a 6000 Candlepower Flashlight with batteries. It's ready to use to inspect your aircraft windows for possible bolt hole damage.

P/N 12-01333

STORAGE STATION



For storage of up to 15 wire belts or 9 rubber erasers and one MBX Power Tool (machine, belts, erasers not included).

P/N 12-01399

MBX PNEUMATIC SURFACE STARTER SET



For the removal of seam sealant, corrosion, paint, vinyl decals, glue on aluminum and alloy. MBX Surface Treatment Systems Patented Technology: MBX Systems are different from conventional surface treatment systems in that MBX Systems are based on several physical principles. Flexible brush-belts are inserted loosely into a cage-like adaptor system and secured with safety arms. The centrifugal force created by rotation causes the brush-belt to tighten and work as if suspended on a cushion of air. Advantages: Vibration-free operation: The vibration of the wire bristles that occurs when the bristles strike the target surface is absorbed by the air-cushion. The bristles re-strike the target surface at rest (without vibration). This achieves the maximum kinetic energy.

SET 1

• MP-3500 - MBX Pneumatic Power Tool S (3500 rpm) with adapter system for 23mm belts/31mm rubber eraser. • AA-0011 - Adapter for 11mm wire belts • BS M11X - V2A Wire Belt, Med., 11mm angled tips • BS-F11 - V2A Brush Belt, Fine, 11mm • RE-0023 - Rubber Eraser, 31mq.....P/N 12-01394



Medium (11 or 23 mm)
For the removal of seam sealant & corrosion on aluminum bodies



Fine (11 or 23 mm)
For the removal of paint on aluminum bodies.

MBX BRUSH BELTS

MBX Belts are made of a high-performance polyamide fabric - tension resistant up to 440 kilograms. Individual bristles made of spring steel or stainless steel are anchored U-shaped in the flexible polyamide fabric. The materials used for the production of MBX Belts offer top safety and durability due to the high flexibility of the MBX Belts. No clogging - no heat built-up - no grinding. The high masses due to centrifugal force during rotation are absorbed safely by MBX Adapter Systems. MBX Medium have angled tips to create a sandblast effect. 11mm is for especially hard-to-reach-areas such as a 90° angles.

BS-M11X Med. Blue 11mm Brush
P/N 12-01402

BS-M23X Med. Blue 23mm Brush
P/N 12-01403

BS-F11 Fine Blue 11mm Brush
P/N 12-01404

BS-F23 Fine Blue 23mm Brush
P/N 12-01405

MBX VINYL ZAPPER



"The rotating toothed eraser wheel", patented For the removal of self-adhesive foils and materials, wide-area decoration, adhesive residue on decorative strips and lettering on OEM-painted surfaces made of metal, aluminium, glass, fibreglass (gel coats) - and most amazing: NO PAINT DAMAGE. The centrifugal force created by rotation makes the MBX Vinyl Zapper work as if suspended on a cushion of air.

Advantages: Faster working speeds of up to 3,500 rpm Conventional rubber eraser wheels operate only at circa 1,500 rpm. No paint damage, no smearing despite speeds of 3,500 rpm Toothed wheel design. Easy handling. Vibration-free, smooth running (compare a solid rubber tire with an air-filled tire). Increased performance. The working surface of the MBX Vinyl Zapper is strongly enlarged by the application of pressure to the work surface. This improves performance (compare to a car tire containing only a small amount of air). Long service life Wide construction. Vinyl Zapper 31mm Toothed Wheel Construction Removal of elements such as vinyl decals & DOT tape from metal surfaces, fiberglass, plate glass, wood, aluminum, OEM paint finish...P/N 12-01406

MBX VINYL ZAPPER KITS



MBX Vinyl Zapper Kit is for removing vinyl decals and graphics on metal glass and fiber glass. It is available with either a pneumatic tool or an electric tool.

Description	Part No.	Price
MBX Pneumatic Vinyl Zapper Kit USSP-01-05 MBX Pneumatic Tool, 1-23mm Adaptor, 3 Vinyl Erasers	12-02038	.

CLECOS - HOLE SAWS

CLECO SHEET HOLDERS

K-SERIES SPRING CLECOS



Sheet holders provide the quickest method for holding sheets together for drilling or riveting. Drill the size hole needed for the rivet and insert the sheet holder. The holders listed comprise the most common sizes. Material thickness range 0" - 1/4". Length is 2.26"

Use with sheet holder pliers. **10% discount on 50 pcs., 15% discount on 100 pcs.**

Description	Size	Part No.	Price
M-3/32 Cleco	3/32"	12-01140	.
M-1/8 Cleco	1/8"	12-01138	.
M-5/32 Cleco	5/32"	12-01141	.
M-3/16 Cleco	3/16"	12-01139	.

KK-SERIES SHORT BODY SPRING CLECOS - Designed for clamping thicker material. 0-1/2" grip range. Length is 2.40". Made in USA

Material	Size	Drill Size	Grip	Part No.	Price
Copper	1/4"	1/4	0-1/2"	12-02424	.
Zinc	3/32"	#40	0-1/2"	12-02077	.
Copper	1/8"	#30	0-1/2"	12-02078	.
Black	5/32"	#21	0-1/2"	12-02079	.
Brass	3/16"	#10	0-1/2"	12-02080	.

KHD-SERIES LONG REACH SPRING CLECOS - Designed for clamping thicker material. 0-1/2" grip range. Length is 2.40". Made in USA

Material	Size	Grip	Part No.	Price
Zinc	3/32"	0-1/2"	12-02077	.
Copper	1/8"	0-1/2"	12-02078	.
Black	5/32"	0-1/2"	12-02079	.
Brass	3/16"	0-1/2"	12-02080	.

CL SERIES - The "CL" series fasteners are the standard plunger type Cleco with an extended grip range of 1/4" - 1/2". Length is 2.475" Spring type Fastner

Material	Size	Part No.	Price
Zinc	#40	12-02425	.
Copper	#30	12-02426	.
Black	#21	12-02427	.
Brass	#10	12-02428	.

CLECO KEEPER



Fabricated of durable polypropylene, the Cleco Keeper is pre-punched to hold up to fifty sheet metal fasteners. Allows the builder to extract and install

Clecos from the storage bin to the work with one hand. Compact, the Cleco Keeper measures 8" L x 3" W. Helps eliminate misplaced fasteners and makes inventory of available fasteners quick and accurate. Available in 3 models to hold 3/32", 1/8", 5/32", or 3/16" clecos.

For 3/32" clecos.....P/N 12-10116
For 1/8" clecos.....P/N 12-10117
For 5/32" clecos.....P/N 12-10118
For 3/16" clecos.....P/N 12-00604

NO-MAR" REUSABLE CLECO BOOTS



Eliminates surface marring both on painted and unpainted surfaces. Easily slips on plier operated style clecos, one size fits all. Yellow polyurethane color. 25 pcs./pkg.....P/N 12-00626

CLECO PROTECTOR



Prevent Damage with Precision: The Cleco Protector is a small yet indispensable tool that fits snugly onto your cleco, ensuring it won't cause any harm to your precious work. Say goodbye to dings and gouges forever!

No More Unsightly Imperfections: Those frustrating small dings around builder rivets will become a thing of the past when you use our Cleco Protector. Don't let bent clecos mar your masterpiece. P/N 12-06309

CLECALL UPRIGHT CLECO PLIERS



The world's lightest and most comfortable cleco pliers!™ Clecall Upright Cleco Pliers: Faster to use / Easier to Activate. Spring Loaded to open with less effort. 70% lighter than normal cleco pliers at 4.3 oz. (aluminum version) Latest design accommodates 1/4" Cleco width. Vertical profile installs clecos in tight areas with ease! Reduce fatigue and wrist pain. Install clecos on upside down surfaces easily. Designed by Zenith Builder and EAA Lifetime Member. Economy Steel PliersP/N 12-03756

CLECO GRIP POWER DRIVEN SHEET HOLDERS



Power-Hex Nut Style - Standard Grip 0-1/2". Hex Nut Fasteners are recommended for high production applications that require a consistent clamping force. They are pneumatic driven with the US7381HX Power Nut Runner.

Description	Size	Part No.	Price
0-1/2" Grip Power Driven Hex Nut Fastner, Copper	#30	12-02430	.
0-1/2" Grip Power Driven Hex Nut Fastner, Black	#21	12-02431	.
0-1/2" Grip Power Driven Hex Nut Fastner, Brass	#10	12-02432	.



Power-Hex Nut Style - Long Grip 0-1"

Description	Size	Part No.	Price
1" Grip Power Driven Hex Nut Fastner, Zinc	#40	12-02433	.
1" Grip Power Driven Hex Nut Fastner, Copper	#30	12-02434	.
1" Grip Power Driven Hex Nut Fastner, Black	#21	12-02435	.
1" Grip Power Driven Hex Nut Fastner, Brass	#10	12-02436	.



Manual Wing Nut Style - Standard Grip 0-1/2". Wing Nut Fasteners are recommended for low production applications where high clamping force is required. The clamping force ranges from zero to 300 lbs.

Description	Size	Part No.	Price
0-1/2" Grip Manual Wing Nut Fastner, Zinc	#40	12-02437	.
0-1/2" Grip Manual Wing Nut Fastner, Copper	#30	12-02438	.
0-1/2" Grip Manual Wing Nut Fastner, Black	#21	12-02439	.
0-1/2" Grip Manual Wing Nut Fastner, Brass	#10	12-02440	.



Manual Wing Nut Style - Long Grip 0-1"

Description	Size	Part No.	Price
1" Grip Manual Wing Nut Fastner, Zinc	#40	12-02441	.
1" Grip Manual Wing Nut Fastner, Copper	#30	12-02442	.
1" Grip Manual Wing Nut Fastner, Black	#21	12-02443	.
1" Grip Manual Wing Nut Fastner, Brass	#10	12-02444	.

CAMLOC PLIERS



These Camloc Pliers are used to depress #2600, #2700 and #4000 series Camloc (C-LOCK) studs so they can be properly installed. Pliers are manufactured from forged steel and feature polished bearing surfaces to avoid scratching the stud as it's being installed. The grips are rubber cushioned for extra comfort and to reduce slipping.....P/N 12-01475

PNEUMATIC CLECO INSTALLATION TOOL



Features: • Lever throttle • 360° swivel mount • For use on button type and side grip temporary fasteners • Quiet operation • Straight handle • 5/8" polyurethane lead hose with 1/8" Male NPT • 5-3/8" Length of tool with 1/4" Female NPT Threaded for air fitting • Made in the U.S.A.....P/N 12-01120

SPRING LOADED CLECO PLIERS



Due to significant demand, Clecall has developed the first spring loaded traditional cleco pliers with a very affordable price pointP/N 12-03807

CLECO SHEET HOLDER PLIERS



These pliers are designed to grip and actuate all standard sizes of sheet holders and tension clamps. New manufacture.....P/N 12-10105

PLANE PLIERS LATCHING CLECO PLIERS



Wider Handle - About twice as wide as traditional cleco pliers. Clecos can be attached to the pliers with one hand if the other hand is not available. Hard Point for cleco stem - The pliers are made of aluminum; however, a hard steel puck is located at the push point in the upper portion of the pliers which press against the cleco stem. Pivot Bearing Assembly - A special arrangement of bearings is housed within the pivot area. This arrangement of bearings ensures the rear of the pliers stay in alignment so the latch will stay within the catch area. Torsion Opening Spring - A torsion spring is utilized to open the pliers fully. Side Opening - The approach to the cleco is from the side rather than from the front. P/N 12-06831

TO

TOOLS - CUTTERS

5 INCH SERRATED EDGE SCISSORS



5" stainless steel scissors are ideal for consumer and industrial applications. High quality stainless steel blades meet perfectly for precision cutting. The material being cut is held in place by one blade which is slightly serrated providing maximum control. Scissors so sharp, they can cut through electrical wiring, plastic, aircraft composites, Kevlar® and more P/N 12-02975

UTILITY SCISSORS



These 5.5" stainless steel utility scissors can cut through heavy materials, while the black plastic handle and ergonomic design make using the tool comfortable. These scissors are not only useful in the medical field, but in the industrial world as well, and its strong safety tip can offer peace of mind to medics and industrial workers alike P/N 13-03015

CERAMIC SAFETY SCISSORS



With a proprietary finger-friendly ceramic grind, these scissors cut materials effectively, but they resist cutting skin. Used in industrial, institutional, and educational settings alike, these lightweight scissors are ambidextrous and durable. Soft-touch finger grips line their tough glass-filled nylon handles for the ideal mix of strength and comfort. They are also non-sparking and chemically inert P/N 12-04970

NO NICK TOOL CABLE TIE REMOVAL TOOL



No nick tool cable tie removal tool
P/N 12-03169

PLASTIC / LAMINATE CUTTER



Olfa Heavy-duty plastic/laminate cutter, designed to produce a fine score line to precisely break plastics, acrylic and laminates. Features built-in room for spare blades, and blade retractable function. Comes with 2 spare blades in handle with shipment P/N 12-02973

RATCHET-LOCK UTILITY KNIFE



This heavy-duty knife features an all-over rubber grip for professional comfort and control. An acetone resistant, elastomer handle with a poly-acetate blade-lock makes it an official acetone resistant cutter. It features a ratchet-wheel blade lock and a heavy-gauge stainless steel blade channel that holds blade tight. A new sharp edge with each snap P/N 12-03654

FIBERGLASS RUBBER GRIP UTILITY KNIFE



This heavy-duty auto-lock utility knife is a powerful anti-slip utility knife, featuring a professional grade Fiberglass rubber grip and automatic blade lock for maximum comfort and control. Heavy-gauge stainless steel blade channel protects and holds blade tight. Acetone resistant handle for easy cleaning. Built in versatile metal pick for opening paint cans, removing switch plates and more. Easy, tool-free blade change. Includes the double-honed UltraSharp Black snap-blade P/N 12-03655

OLFA SNAP BLADE KNIFE



Features a convenient detachable built-in blade snapper/disposal container in a heavy-duty ABS plastic handle. Storage container can hold up to 26 9mm AB blade segments for thousands of cuts before emptying is needed. Easy, tool-free blade change. Blade is made of high-quality Japanese grade carbon tool steel P/N 12-03656

CERAMIC CRAFT KNIFE



The Slice craft knife is ideal for precision cutting, scraping, and handling. Its ceramic safety blade is non-sparking, chemically inert, safe to 1600 degrees Celsius, never rusts, and requires no oil coating. With a textured grip for superior control, this precision knife allows the user to make accurate, delicate cuts. Its ambidextrous no-roll design is weighted for balance and stability. Includes one rounded-tip ceramic safety blade with patented finger-friendly edge P/N 12-04971

SLICE PRECISION CUTTER



The Slice® Precision Cutter is the perfect tool for crafters who want to cut various materials without worrying about harming themselves or their project P/N 12-05634

SELF HEALING ROTARY CUTTING MATS



Self-healing, double-sided large mat protects and covers work. Green, self-healing professional quality rotary mat. Double-sided with yellow grid lines on one side for precision cutting, solid on opposite for general cutting. 1.5mm thick for a variety of applications. Store flat.

24" x 36" P/N 12-02403
23" x 70" - with clip set (RM-clips/2) P/N 12-02404
35" x 70" - with clip set (RM-clips/3) P/N 12-02405

ROTARY CUTTER



Ergonomic 45mm rotary cutter features a unique comfortable handle design for both left- and right-handed use.

Rotary Cutter P/N 01-00302
RB45-1 Replacement Blade only P/N 01-00300
RB45-1 Replacement Blade pk of 5 P/N 01-00301
Rotary Pinking Blade P/N 12-01709

Good For: general quilting, sewing and craft projects. Great for cutting out patterns, reduces fraying. Can be used in industrial applications.

STAINLESS STEEL SCISSORS



The OLFA stainless steel scissors (7" overall length) are extremely high quality stainless steel blades perfect for precision cutting. Ideal for use

on such varied materials as paper, fabrics, plastic, rubber, & aircraft composites. P/N 01-00303

L-2 CUTTER



18MM heavy-duty cutter features a ratchet wheel blade lock, heavy gauge stainless steel blade

channel, highest grade carbon tool steel blade and anti-slip rubber grip insert. P/N 12-00258

NOL-1 CUTTER



Heavy-duty 18mm "HandSaver" Acetone resistant cushion grip with ratchet wheel blade lock and high-carbon tool steel snap-off OLFA blade. Cutter P/N 12-00257

ULTRAMAX CUTTER



Heavy-duty utility knife / cutter is an auto lock cutter includes a stainless steel blade channel with a unique cushion handle provides a comfortable and positive grip.

P/N 12-02367


H-1 CUTTER



25mm Extra heavy-duty cutter features largest blade available, ratchet lock to prevent slipping, rubber grip insert for positive control, and a rope loop to secure cutter to belt or work table.

Cutter P/N 12-00259
Replacement blades (5 pack) P/N 12-02970

AUTO-LOCK STAINLESS PROFESSIONAL KNIFE



Accommodates both left- and right-handed users. Features locking slide blade, stainless steel handle and built-in pocket clip/blade snapper. A perfect steel cutter where rust is a concern. Lifetime Guarantee.

Cutter P/N 12-00339
Replacement blades (10 pack) P/N 12-00340

EXTRA HEAVY DUTY RATCHET LOCK CUTTER



25mm Extra heavy-duty cutter features: • anti-slip cushion handle for exceptional comfort and safety • chemical resistant handle for easy cleaning • Heavy gauge stainless steel blade channel holds blade tight • ratchet wheel blade lock • rope loop • high-quality carbon tool steel snap-off blades for sharpness and durability.

P/N 12-02368

EXTRA HEAVY DUTY SNAP-OFF BLADE



Snap-off black blades, are made from high quality carbon tool steel. Blade container locks for safety. Fits most Extra Heavy-Duty handles. 7 cutting edges per blade.

20 blades per pack P/N 12-02369

EXTRA HEAVY DUTY RATCHET LOCK CUTTER



Anti-slip grip cutting tool. Features an automatic blade lock, cushion grip for maximum comfort and control, and a heavy gauge stainless steel blade channel that holds blade tight. Chemical resistant handle for easy cleaning. Includes a pocket clip for convenience, and the premium, ULTRAMAX® ultra sharp durable snap-off blade.

P/N 12-02370

GENERAL SPECIALTY TOOLS



CIRCULAR HOLE CUTTER

General's circle cutters produce precision circles in sheet metal, brass, copper, soft steel, aluminum, plastic, wood and composition materials. Bodies are constructed of heat treated tool steel for durability. All Circle Cutters have replaceable pilot points. The replaceable cutter blades are made of high-speed steel for precise and clean cuts. Circle Cutters are adjustable for cutting variable diameter holes. A hex wrench is included for diameter and depth adjustments.

#4 Cutter.....P/N 12-10600.....



JEWELERS' SCREWDRIVER KITS

The Screwdriver and Hobby Kit includes five interchangeable blades and a heavy duty knurled handle. Loaded with the most popular jeweler's-sized Slotted and Phillips tips and a scratch awl, this modestly priced set is great for model making and other small-scale applications.

P/N 12-19600.....



SWIVEL HEAD PIN VISE

The Swivel Head Pin Vise provides fingertip control of small tools when working with jewelry, electronics or models. The double-ended collet offers two distinct sizes for holding a variety of drill bits, reamers and taps. For added control, this Pin Vise has been design with a knurled aluminum body for a sure grip while the swivel head turns smoothly against your palm.

P/N 92.....



STEEL PROTRACTORS

Trusted by machinists and draftsmen worldwide to deliver crucial measurements with unwavering accuracy. The 6" adjustable arm is ideal for setting bevels, taking measurements and transferring angles. Ultra-fine etched graduations read from 0 to 180 degrees in forward and reverse directions, and will not wear or rub off. Made of ground stainless steel for precision and durability.....P/N 17.....



POCKET CALIPERS

Although small in stature, these 4" Slide Calipers deliver the same accuracy and precision as some of our larger models. The rugged, stainless steel construction, coupled with a compact design makes these Slide Calipers a great addition to any workbench or toolbox. This item provides inside and outside readings in both 1/16" and 1/32" graduations. In addition, there is a decimal equivalents chart on the caliper's back side for help in making measurement calculations. 16ths & 32nds.....P/N 729.....



DIGITAL FRACTIONAL CALIPER

The Carbon Fiber Digital Fractional Caliper brings you three universal systems of measurement, making it an equally practical choice for both professional and do-it-yourself projects. The high-contrast digital display easily switches between inches, millimeters and fractions, with guaranteed accuracy to 0.001". In addition, the lightweight, non-marring carbon fiber construction delivers accurate readings of inside, outside, step and depth measurements.

3" Caliper.....P/N 12-02307.....



FEELER GAGES

Blades are made of tempered steel of exacting tolerances. Each blade has its size printed in both decimals of an inch and millimeters. Nickel plated case has knurled locking nut. No. 230 has 26 3x1/2 in. leaves of the following sizes: .0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .021, .022, .023, .024 and .025 in.

P/N 230.....



STEEL RULES

General's industrial quality Steel Rules are precision made with etched fine black graduations for easy reading and long life. The two finishes available are polished stainless steel or satin chrome. Front graduated in 10ths, and 100ths, back in 32nds and 64ths. Quality 12 inch (30cm) flexible stainless steel rule. Precision made. Fine black etched graduations.

6" Long, 15/32" Wide.....P/N 616.....



WIRE & SHEET METAL GAUGES

#20 WIRE GAUGE - The Wire Gage helps you to accurately determine the thickness of American Standard wire from 0 to 36. The Gage works with all non-ferrous wires, metals and rods such as copper, brass and aluminum. This heavy duty tool is made from hardened and tempered steel, and is stamped with wire sizes on the front and their decimal equivalents on the back

#20 American Standard Wire Gauge - For gauging non-ferrous wire & metal like copper, brass, aluminum, etc.

P/N 12-02384.....



#21 U.S. STANDARD SHEET METAL GAUGE - The Sheet Metal Gage is for gauging uncoated sheet, plate iron and steel, based on weights in ounces per square foot. gauge numbers are in U.S. Standard. Numbers 0-36 (.325"-.007"). Made of hardened steel, with a satin finish for easy reading. Decimal equivalents on the back side. Measures 3-1/4" in diameter.

P/N 21.....



SCREWDRIVER HANDLE SCRATCH AWL

If you're looking for a quality, yet economic awl, then check out our Screwdriver Handle Scratch Awl. Featuring a 3-5/8" steel blade and a durable plastic handle, this Scratch Awl makes a great addition to any workbench of toolbox.

P/N 12-01873.....



UTILITY AUTOMATIC CENTER PUNCH

The Utility Automatic Center Punch is our most economical model, offering a lightweight aluminum body and a hardened steel point. The punch is great for use on various metals and woods, and is impact adjustable.

P/N 12-01874.....



STAINLESS STEEL AUTOMATIC CENTER PUNCH

Provides accurate center punches to prevent drill bits from traveling. It has a one-hand spring impact operation, no hammer needed. This is used for marking, punching & staking and it has a durable stainless steel body that will not rust.....P/N 12-03515.....



LOCKING WING ACADEMIC DIVIDER

This 6" drafting compass is most commonly used to measure inside or outside diameters and reproduce circles and arcs. Often used with maps or architecture, the wing divider features a pencil holder to easily plot curves and lines. Lockable wing for repeat measurements.....P/N 12-04896.....

TO

GENERAL SPECIALTY TOOLS

COTTER PIN PULLER

General's Cotter Pin Puller helps you to easily and safely remove steel cotter pins from confined areas. The compound bend design facilitates use of the tool with either a pull or a twist motion. In addition, the heavy duty screwdriver handle provides a familiar, comfortable grip. P/N 12-01892

PRECISION MAGNETIZER/DEMAGNETIZER



Our Precision Magnetizer and Demagnetizer transforms standard screwdrivers, tweezers and tool bits into powerful magnetic pickups. This dual-sized device can magnetize screwdrivers for installing small screws in jewelry, or demagnetize a set of tweezers for working with sensitive electronics. In addition, the innovative step design allows you to control the level of magnetism that is imposed upon your tools. P/N 12-01890

ARCH PUNCH SET



Our extensive selection of Arch Punches are machined to close tolerances for creating precise holes in gasket material, rubber and soft metals. These industrial-quality tools are hand forged to ensure the longevity and accuracy of the cutting edge. This seven-piece set includes some of our most popular punch sizes and is conveniently packaged in a vinyl storage pouch. P/N 12-01891

INSPECTION MIRRORS



General's Inspection Mirrors are known for their seemingly limitless uses both around the home and in the shop. For instance, an Inspection Mirror can be used to check behind an armoire for lost keys or beneath an engine block for a missing bolt. The Inspection Mirrors come in a variety sizes and lengths, and feature dual ball-and-socket joints for infinite angle adjustments of the mirror. P/N 12-01887

1-1/4 Diam P/N 12-01887
2-1/4 Diam P/N 12-01888
3-1/2 Oblong P/N 12-01889

LED-LIGHTED TELESCOPING INSPECTION MIRROR



2 extra bright LED lights facilitate the inspection of hard-to-see and hard-to-reach areas. Easily peer into the dark crevices of your work space in search of leaks, breaks or lost tools. Telescoping shaft extends to 33 in. (840mm). Fully polished, shatter-resistant glass mirror sits on a 360° swivel, double ball joint for accurate positioning and infinite angle adjustments. Non-slip cushion grip. CE Approved. Round Mirror P/N 12-03197
Rectangular Mirror P/N 12-03199

TELESCOPING ALLIGATOR CLIP



The Telescoping Alligator Clip is often used as a third-hand tool in electrical repair for holding and positioning wires. It is also commonly employed around the home for lighting pilot lights and barbecues. The extendable shaft reaches up to 24-1/2" for working in cramped areas, or to provide a safety buffer for lighting a gas grill or furnace. The tool condenses to 5-1/2" and is equipped with pocket clip for those on the go. P/N 12-01884

DECAL ERASER WHEEL



For quick and easy removal of decals, pinstripes, bumper stickers, reflective tapes etc from glass and OEM painted surfaces without any damage. Also very effective in removing adhesive tapes and glue from the back of moldings. Best result at 1500 - 3000 rpm. Let the wheel do the work, apply light pressure only. Start at the top of the decal and move side to side. For faster results, use entire width of the wheel, do not tilt on angle. Remove any residue with appropriate mild solvent. Natural Rubber. Diameter: 4 Inch. Width: 1 Inch. Max RPM: 4000 Universal arbor, no special tool needed. Use with electric or pneumatic tools. P/N 12-02401

REVOLVING PUNCH



General's revolving punch plier is a convenient spring tension, self-opening tool for punching round holes in leather, plastic, rubber, canvas, cardboard and similar materials. The snap ring pliers are used for the installation or removal of exterior and interior snap rings. Revolving turret with six hardened steel punches: 5/64", 3/32", 7/64", 1/8", 5/32", and 3/16" P/N 72

5PC EXTRA LONG DRIVE PIN PUNCH SET



These Drive Pin Punches have been machined to exacting tolerances for accurate driving without damaging the pin or hole. The punch ends are ground square to sit flush on the top of the pin. Made of hardened tool steel with a knurled body, General's Drive Pin Punches can either be held by hand or with our Punch and Chisel holder. This five-piece set features extra-long 3-1/2" shafts for reaching deeply recessed pins. P/N 12-01875

5-PC PRECISION ULTRAREACH STAR SCREWDRIVER SET SLOTTED & PHILLIPS



These UltraTech Precision Screwdriver Sets were assembled in conjunction with industry tradesmen to offer the most comprehensive and reliable solutions. This five-piece set includes Slotted and Phillips screwdrivers in two distinct handle sizes. The color-coded ring on each screwdriver helps you to easily identify the blade type when working arduously in the field. P/N 12-01881

5-PC PRECISION ULTRAREACH STAR SCREWDRIVER SET



These UltraTech Precision Screwdriver Sets were assembled in conjunction with industry tradesmen to offer the most comprehensive and reliable solutions. This five-piece Torx set features a great assortment of blades in two distinct handle sizes. The color-coded ring on each screwdriver helps you to easily identify the blade type when working arduously in the field. P/N 12-01882

PICK AND HOOK 4 PIECE SET



Get into tight places to retrieve small parts, "O" rings, and gaskets. Great for household and hobby use. Includes straight pick, 90° pick, 120° hook, and round angle hook. High-visibility handles. Screwdriver-style handles give better control. Specifications: Includes straight pick, 90° pick, 120° hook, and round angle hook. High-visibility handles, Screwdriver-style handles give better control, 5-1/4" average length, Handle: 5/8" square, 2-1/2" L, Approximate weight: 0.20 lbs. P/N 12-02642

BULLSEYE PICKS



The bullseye pick was originally used in the dent repair/collision trade, but also works great for restoration work. These are ideal to reach in around the edge of

a panel, around a gusset, or into a blind area to repair the dent from the backside. By sighting the low area through the open sight, the tool will deliver accurate light blows to raise the low area. This tool includes both a regular pick and a blunt tip. The blunt tip works great for aluminum and prevents unattractive pick marks in the metal.

15" P/N 12-02292
25" P/N 12-02293

THREAD REPAIR FILE



The Thread Repair Files help breathe life back into bolts, screws or fittings that have been damaged due to cross-threading or corrosion. Made of high carbon steel, the Repair Files offer eight different thread pitches. In addition, the Thread Repair Files can also be used as a screw pitch gage. P/N 12-01879

PRECISION PENCIL COMPASS



The Precision Pencil Compass is a robust scribing and marking tool with a jaw capacity of up to 9". The fulcrum spring handle makes this tool great for making contours, circles and edge marks. A carpenter's favorite. P/N 12-01872

SPECIALTY TOOLS

M-4 PIPER / CESSNA / MOONEY TAPER PIN TOOL




Sweating the Piper Control Wheel AD? Relax, this patent pending M-4 tool makes the hardest part of compliance with this AD easy. This specialty tool was designed to counter the frustration of removing the Piper control wheel taper pin. With the aid of the M-4 tool even the most stubborn taper pin can be removed in minutes, not hours, without vibration or stress being induced on your aircraft or the surrounding delicate instruments and avionics. The tool is self-indexing, locking the taper pin in position and securing itself in place for easy pin removal. Quality made in the USA and precision milled from bar stock for maximum strength, the body is Cad Plated for corrosion resistance and the press screw is Grade 8 to assure long life. The tool is shipped with detailed instructions.

P/N 12-02620

5 FLUTE ROSE PATTERN COUNTERSINKS



Designed with the perfectionist in mind, these Rose Pattern Countersinks are a must have for any close-tolerance woodworking or machinist project. The 5-flute design reduces chatter and easily pierces steel, brass, aluminum, plastic and wood. The stepped shank can be used with either a 1/4" or 3/8" chuck.



A	B	C	PN	Price
1/2"	3/8"	1/4"	12-01863	.

6 INCH CONTOUR GAGE



General's 6" Contour Gage is designed for precise surface duplication in woodworking, fine carpentry and other professional genres. The 35 ultra-thin leaves per inch assure that you are getting an exact replication of your copied shape. The Contour Gage is capable of duplicating surfaces up to 3-1/2" deep. Instructions: 1. Press Contour Gage against surface to be copied. 2. Trace the formed contour gage onto your cutting material. 3. Cut the material. 4. Fit into place

P/N 12-01870

ENGRAVER FOR WOOD AND METAL



- Perfect tool for engraving in plastic, metal, glass, ceramic, leather, wood, and more
- Depth-adjustment dial helps control the length of the engraver's stroke
- 13-watt motor provides up to 7,200 strokes per minute
- Lightweight 9 oz design combines with the soft-touch grip for easy handling
- Includes a two-piece stencil set and a tungsten carbide tip for powerful and reliable engraving.

P/N 12-05429

PLAIN TAP WRENCHES



The standard Tap Wrenches are perfect for creating straight and accurate thread holes in your work piece. The fixed T-Handle provides a large gripping surface for generating maximum leverage. This versatile tool can also be used with reamers, drill bits, screw extractors and other hand-turned tools.

Tap Capacity	Length	Part No.	Price
NO. 0 TO 1/4" (1.6 TO 6.3mm)	2-1/4" (57mm)	12-01877	.
NO. 12 TO 1/2" (6 TO 12mm)	3-3/4" (95mm)	12-01878	.

RATCHET OFFSET SCREWDRIVER



An Offset Ratchet Screwdriver is a useful tool to have on hand as it provides greater leverage compared to a traditional screwdriver. The swift ratcheting motion allows you to remove and install screws with ease, and the offset head provides odd-angle access in obstructed areas. This item features two Slotted screwdriver blades and a reversible ratchet.

P/N 12-01883

CESSNA SEAT RAIL GAUGE



Allows for quick limit checking of seat rail hole and wear dimensions Gage elements are made from heat treated blue tempered steel Each element is marked to correspond to the limits set forth in the relevant AD The three gage elements are linked together on a universal spiral key ring.

P/N 12-01056

LIGHTED POWER PRECISION SCREWDRIVER



These lighted cordless precision screwdriver (502) from general tools & instruments (general) is a first-of-its-kind tool that can handle all of those difficult, repetitive fastening jobs involving tiny screws in tight spaces where it is difficult to see. it s perfect for on-the-go technicians and anyone who works with small parts and micro assemblies. Super Bright LED Light 6+ Hours of Power 100+ RPM Super-Torque Drive Cordless (2 AAA alkaline batteries included)

P/N 12-03517

REPLACEMENT BLADE OIL CAN CUTTER



General Tool's Gold Standard Cutting Wheels are made from tempered, bearing tool steel for smooth, exact pipe cuts. The slim-line surface geometry ensures fewer inner surfaces burrs and less chance for outer surface distortion. The RW122 is designed for larger capacity cutters on iron pipe and other tough surfaces.

P/N 12-01159

CUTTER PLUG WOODWORKING



General's Plug Cutters produce accurate plugs for covering screw holes in decking, flooring and fine furniture. Plug cutters are great for creating a decorative effect in any woodworking project and can also be used to repair nicks, scratches and dents. Each cutter is made from hardened alloy steel and will fit in both hand-held power drills and drill presses.

3/8".....P/N12-01866

1/2".....P/N 12-01867

5/8".....P/N 12-01868

AARC BEARING GREASE PACKER



The Quick, Easy, Efficient way to Grease Wheel Bearings! Experience has shown that the inspection and cleaning of wheel bearings is time consuming and messy. Likewise, the AARC Bearing Packer utilizes similar principles to hand pressurize grease through the individual roller bearings for a complete – total – pack of the bearings. The use of the cone or the plates assures that the grease totally encompasses the rollers in grease. This simple method is accomplished quickly with minimal waste.

P/N 12-03753

AARC BEARING CLEANER



The Quick, Easy, Efficient way to Grease Wheel Bearings! Experience has shown that the inspection and cleaning of wheel bearings is time consuming and messy. The AARC Bearing Cleaner was developed to expedite this process by using a system designed to aggressively flush cleaning solvent through the roller bearings to loosen and rinse the accumulated worn grease from the bearings. This cleans the rollers, making inspection more efficient.....

P/N 12-03754

JOGGLE-360 FABRICATION TOOL



Noah Industries has introduced the Joggle-360 into its lineup of innovative metal aircraft fabrication tools. The Joggle-360 will joggle round openings for inspection plates with joggle widths up to 0.562 inch and straight joggle offsets up to 0.625 inch. The tool features hardened steel rollers that form the joggle while gliding around the opening or along the edge by ball bearings that eccentrically adjust for joggle width.

Instruction:

1. Adjust the guide rollers to the desired set back or width of joggle by rotating the Eccentric Guide Roller Adjustment Screws with an Allen wrench.
2. Place the Joggle-360 onto the work that you are going to joggle and tighten the Tension Knob.
3. For straight joggles, run the Joggle-360 back and forth along the work tightening the Tension Knob as required until you achieve the desired joggle depth. Joggling a hole is the same process. Be sure to keep the Guide Rollers in contact with the edge of your work.
4. When the joggle is finished, loosen the Tension Knob and remove the tool from your work.

Note: You may need to tighten the Eccentric Lock Screws from time to time in order to keep the Eccentric Guide Rollers from rotating during use.

P/N 12-02252

TO

MILWAUKEE TOOLS

MILWAUKEE M12™ CORDLESS LITHIUM-ION GREASE GUN



(TOOL ONLY) - The M12™ Cordless Lithium-Ion Grease Gun delivers the highest max operating pressure in its class to help you handle heavy-duty applications and eliminate downtime. It's capable of delivering more than 8,000 PSI max operating pressure for heavy machinery, cold weather applications and clogged grease fittings. P/N 12-06143

MILWAUKEE M18 FUEL 1/4" BLIND RIVET TOOL WITH ONE-KEY KIT 2660-22CT



M18 FUEL 1/4" Blind Rivet Tool w/ one key is the fastest cordless rivet tool. It eliminates the need for hoses and compressors while delivering up to 3X longer life than other cordless riveters. This rivet gun significantly increases productivity, installing rivets up to 50% faster than cordless competitors. The premium steel alloy 3-jaw design delivers more work between jaw changes. P/N 12-05642

MILWAUKEE M12 RIVET GUN KIT



The M12™ Rivet Tool is the first cordless solution that delivers fast, easy riveting while maintaining performance, durability, and size. Pull Up to 3/16" Stainless Steel Rivets. 450 1/8" Steel Rivets per charge. Part of 90+ Solutions on the M12 Platform. Pull 3/32", 1/8", 5/32", 3/16" Rivets. Aluminum, Steel, Stainless Steel - Capacity. 0.8" Stroke Length. 2,000 lbs. pulls force. Tool holds rivet in any orientation. Ergonomically designed for force reduction - M12™ Rivet Tool Ergonomic Study P/N 12-05728

MILWAUKEE M18 1/2" MID TORQUE IMPACT WRENCH WITH FRICTION RING KIT 2962-22



M18 FUEL™ 1/2" Mid-Torque Impact Wrench w/ Friction Ring delivers the best power to weight ratio, most access in tight spaces, and faster removal speed. It provides 650 ft-lbs of nut-busting torque and only weighs 5.1 lbs, making it extremely versatile, capable of performing a wide variety of applications. P/N 12-05734

MILWAUKEE M12 FUEL™ 1/2" INCH TORQUE WRENCH W/ ONE-KEY™



M12 FUEL™ 1/2" Digital Torque Wrench w/ ONE-KEY™ is the industry's first torque wrench with a motor, delivering increased productivity, precise torque accuracy, and user demanded reporting functionality. The 1/2" torque wrench delivers 50% faster installation time, replacing the hand tool or two tool installation process and providing more control to reduce the over torquing of fasteners. The 1/2" digital torque wrench provides 12.5-150ft-lbs of torque range and accuracy within 2% for torque critical fasteners. P/N 12-05883

MILWAUKEE M12 FUEL™ 3/8" INCH TORQUE WRENCH W/ ONE-KEY™



M12 FUEL™ 3/8" Digital Torque Wrench w/ ONE-KEY™ is the industry's first torque wrench with a motor, delivering increased productivity, precise torque accuracy, and user demanded reporting functionality. The 3/8" torque wrench delivers 50% faster installation time, replacing the hand tool or two tool installation process and providing more control to reduce the over torquing of fasteners. The 3/8" digital torque wrench provides 10-100ft-lbs of torque range and accuracy within 2% for torque critical fasteners. P/N 12-05884

MILWAUKEE M12 CORDLESS 3/8" RIGHT ANGLE DRILL/DRIVER (TOOL ONLY) 2415-20



The most versatile right angle drill/driver on the market. With a head size of just 3-3/4", this M12™ Right Angle Drill/Driver is compact and lightweight for drilling and fastening in tight spaces, yet delivers 100 in-lbs of torque. It's the first subcompact with a spindle lock chuck for maximum versatility and grip. It also features the industry's first electronic clutch, with 12 torque settings and an LED indicator for fastening with complete control. The M12 Redlithium Battery Pack (sold separately) delivers more work per charge and more work over pack life than the competitors. P/N 12-05680

MILWAUKEE M18 CORDLESS TIRE INFLATOR 2848-20



Max. 5 Year Tool Warranty

Fastest 18V Cordless Tire Inflator. Truefill Technology: Auto Pressure Check Feature Activates to Ensure PSI Target is Achieved, Automatic Shut- off at Selected PSI Prevents Overinflation. Tire Capacity: Premium Components and Unmatched Durability to Handle Tires Over 100 PSI, Rated for 150 PSI P/N 12-05649

MILWAUKEE M12 SOLDERING IRON KIT 2488-20



The M12 Soldering Iron delivers fast application speeds by reaching operational temperature in under 18 seconds and maintaining an optimized temperature throughout the most demanding applications. The heat indicator utilizes Redlink Intelligence to notify users when the tool is ready-to-use and safe-to-store, eliminating the guesswork. The 3-stop pivoting head provides unmatched access by allowing users the ability to adapt the tool for the application and solder in more confined spaces. P/N 12-05683



MILWAUKEE 15PC SAE FLEX HEAD RATCHETING COMBINATION WRENCH SET 48-22-9413

15 Piece SAE Flex Head Ratcheting Combination Wrench Set features 2.5 degrees of arc swing and 144 ratcheting positions, allowing quick and efficient work in tight spaces. The flex head wrenches have double-stacked pawls within the ratcheting mechanism, which increases durability and extends the life of the tools. The flexible head gives you increased accessibility in difficult-to-reach areas. P/N 12-05659

MILWAUKEE 15 PC RATCHETING COMBINATION WRENCH SET METRIC 48-22-9516



Ratcheting Combination Wrenches feature 2.5° of arc swing, allowing our users to work quickly and efficiently in tight spaces. Mechanic's wrenches features durable double-stacked pawls in the ratcheting mechanism offer the longest ratchet life and improved access with 144 ratcheting positions. The 15 piece metric ratcheting combination wrench set comes in a tray designed for steel storage drawers, allowing for efficient storage with no wasted space. P/N 12-06215

MILWAUKEE 32PC 3/8" - INCH METRIC RATCHET AND SOCKET SET



Ratchet and Socket Set features sockets with FOUR FLAT™ Sides that deter rolling and are wrench compatible for maximum productivity. The 90-tooth ratchet tool provides 4° of arc swing and a slim profile for work in tighter spaces. We've stamped the sizes into each socket for easy-to-read visibility. You can keep our 32-piece 3/8 in. Drive Ratchet and Socket Set organized in the included PACKOUT™ Compact Low-Profile Organizer equipped with a clear top for easy identification of parts at a glance. P/N 12-06386

MILWAUKEE 23PC RED HELIX COBALT DRILL BIT SET 48-89-2338



Red Helix Cobalt 23 Piece Drill Bit Set is engineered for extreme durability and longer life in hard metal applications. The Milwaukee Cobalt drill bits are designed with a Variable Helix that includes an aggressive 35° Helix Angle which ends at 15°. This set includes 23 bits from 1/16" to 1/2". P/N 12-05697

MILWAUKEE M12 RIVET TOOL 6INCH EXTENSION 48-95-0100



M12 Rivet Tool 6" Extension is the perfect solution when setting rivets in recessed positions and with difficult access. The all metal extension is designed to be low profile at only 3/4" in diameter, equal to the clearance of the standard outer jaw housing on the 2550. P/N 12-06224

MILWAUKEE JOBSITE



OFFSET SCISSORS 48-22-4047
Milwaukee Jobsite Offset Scissors feature all-metal handles for added durability and up to 10X Longer Life. P/N 12-05708

SEE OUR WEBSITE FOR OUR COMPLETE SELECTION OF MILWAUKEE TOOLS.

WWW.AIRCRAFTSPRUCE.COM

Prices Subject to Change without Notice - Valid as of June 16, 2026.
Please view our website for current prices.



SONIC TOOLS SMALL SFS SCREWDRIVER SET

The Sonic 8-piece screwdriver set is a necessity. Sonic screwdrivers feature a bi-material handle (polypropylene and thermoplastic vulcanizate) that are ergonomically designed for comfort as well as maximum power. Chrome Vanadium shafts ensure durability for years of use, and a hardened tip offers maximum gripping power. In the Sonic Foam System, tools are stored in a well-organized, chemical resistant, CNC machined foam inlay. They are quickly accessible for fast workability, ergonomically laid out, and feature a two-tone color system for convenient survey of missing tools. Sonic screwdrivers are available in 3 different styles-standard, stubby, and extra-long. Sonic screwdrivers include ergonomic tri-lobe plastic handles with a rubber overmold for a comfortable grip. (600823, 600823-CE). P/N 12-06855



SONIC TOOLS LONG SCREWDRIVER SET

Shop Sonic's Long Screwdriver Set that features a bi-material handle which is designed for comfort as well as maximum power. Chrome Vanadium shafts ensure durability for years of use, and a hardened tip offers maximum gripping power. In the Sonic Foam System, the tools are laying in well-organized, chemical resistant, foam inlays with accurate shapes. This allows technicians to quickly access their tools and find what is missing. Sonic screwdrivers feature a bi-material handle (polypropylene and thermoplastic vulcanizate) that are ergonomically designed for comfort as well as maximum power. (600625, 600625-CE). P/N 12-06853



SONIC TOOLS SMALL SFS HOOK SET

How many times have you needed a hook-tool and didn't know it? More times than you know. Hook tools are great for removing coolant hoses and vacuum lines, as well as unlocking rubber gaskets on old windows. This 6-piece Sonic hook set includes a straight pick, more like an ice-pick. Also, five other various shapes of hooks provide an unlimited approach to different needs. This 6-piece Sonic hook set includes a straight pick, more like an ice-pick. Also, five other various shapes of hooks provide an unlimited approach to different needs. (600623, 600623-CE) P/N 12-06858



SONIC TOOLS SMALL SFS PLIER SET

This Sonic Tools 4-piece plier set is a simple and effective kit. Pliers made in Germany offer superior grip and durability while the handles provide excellent ergonomics for the most comfort. The diagonal pliers cut wire very easy while the 7-inch combination pliers are great for all-around gripping. There are two long-nose pliers round-out this small kit in a straight and bent 8-inch configuration. P/N 12-06854



SONIC TOOLS SMALL SFS SAE WRENCH SET

Sonic Tools SAE combination wrenches include an open-end on one end of the wrench and a box-end on the other end. The box-end of these wrenches include a 12-point design for easier and quicker engagement of fasteners. Sonic wrenches are made from Chrome-Vanadium steel for a lifetime of durability, strength, and corrosion resistance. This 14-piece set covers sizes from 1/4 to 1-1/16. In the Sonic Foam System, tools are stored in a well-organized, chemical resistant, CNC machined foam inlay. They are better organized, quickly accessible for fast workability, ergonomically laid out, and feature a two-tone color system for convenient survey of missing tools. (601406, 601406-CE) P/N 12-06857

SONIC TOOLS MCS SAE COMBINATION SET 1/4 INCH 32 PIECE



Take your tools with you with this Sonic mobile case set. Includes sockets from 3/16"-1/2" as well as the ratchet, extension, u-joint and more. Sonic ratchets and sockets are made from Chrome Vanadium steel for durability and resistance to rust and corrosion. This MCS combination 1/4" socket set is equipped with 32 pieces. The blow-molded case includes laser cut and chemical resistant foam, with every tool clearly and properly labeled. The latch system makes opening and closing the case incredibly easy. This unique mobile case set takes organization and efficiency to a new level. P/N 12-06863




SONIC TOOLS MCS SAE SOCKET SET 1/4 INCH, 1/2 INCH

Take your tools on the go with the Sonic mobile case set. This 85-piece set includes 1/4" and 1/2" drive ratchets with SAE sockets in an easy to carry case. Inside the case are two laser-cut foam trays just like Sonic toolboxes. Each tool has a perfect place in the foam along with the corresponding label. Also included are extensions, socket-driver handle, and bits. Sonic ratchets and sockets are made from Chrome Vanadium steel for durability and resistance to rust and corrosion. This MCS socket and bit socket set is equipped with 39 sockets totaling 85 pieces. The blow-molded case includes laser cut and chemical resistant foam, with every tool clearly and properly labeled. The latch system makes opening and closing the case incredibly easy. This unique mobile case set takes organization and efficiency to a new level. P/N 12-06864



SONIC TOOLS SMALL SFS SAE BIT SOCKET SET 1/4 INCH

Get a lot of solutions in one small package with the Sonic Tools 63-piece SAE 1/4" Socket and Bit set. Sonic sockets and ratchets are made from Chrome Vanadium steel for a lifetime of durability, strength, and corrosion to resistance. This set comes with one Quick Release 1/4" ratchet, a 1/4" Disc-ratchet, and a 1/4" nut-driver adapter are the drivers for the majority of the other pieces in this kit. This 63-piece set includes shallow 12-point sockets from 3/16" to 1/2", but you also get a plethora bits, extensions, and adapters. Finally, this kit is completed with a 10-piece Hex-key set from 1.27mm to 10mm. (106304, 106304-CE) P/N 12-06856



SONIC TOOLS MEDIUM SFS SAE SOCKET SET 1/4 INCH, 3/8 INCH, 1/2 INCH

121 Piece Set. In this toolset are 1/4", 3/8" and 1/2" SAE sockets that range from 3/8" all the way up to 1-1/4". This set also includes shallow and deep-well sockets and crows feet. Sonic sockets are made from Chrome Vanadium steel while socket bits are made hardened tool steel. Also included in this 121-piece set are SAE Hex bits from 3/16" to 5/8", and you get a 10-piece Hex-key set that includes sizes from 1/16" to 3/8". P/N 12-06859



SONIC TOOLS MEDIUM SFS SAE SOCKET SET 1/4 INCH, 3/8 INCH, 1/2 INCH

93 Piece Set. Shop our Medium Sonic Foam Systems, with integrated tool control, Warranty, and professional-grade SAE Sockets, Ratchets, and more. P/N 12-06859



SONIC TOOLS NEXT S7 TOOLBOX

The Sonic NEXT S7 is our entry model toolbox, best suited for technicians looking for a basic toolset. With its shorter height advantage, along with its smaller frame, it is the ultimate unit for storage anywhere in a workshop. 6 Drawers. **Features:** • Removable worktop built with reinforced steel and a composite inlay worksurface • 6 drawers: 4 shallow (132lb loading capacity, 570x370x65mm); 2 deep (132lb loading capacity, 570x370x150mm) • Casters with a loading capacity of 220lb each • Total loading capacity of 881lb • SFS Compatible: (S,M) • Overall Measurement: 799x929x505mm. **Toolbox Features:** • Drawer Construction - All drawers are built from 1 piece of steel with structural ribs added for rigidity. Each drawer is affixed with ball bearing slides and are fully extendable exposing 100% of the drawer's content. • Anti-Tilt - Featuring an Anti-tilt mechanism to allow for only 1 drawer to be open at any given time, reducing the possibility of unbalanced weight and tipping. When one drawer is open, all other drawers are locked. • Fit, Finish and Construction - All Sonic toolboxes feature a one-piece steel construction. This maximizes strength and rigidity. P/N 12-06844



SONIC TOOLS NEXT S9 TOOLBOX

The Sonic NEXT S9 toolbox is our recommended solution for technicians looking for a basic to intermediate toolset. What makes this toolbox our bestselling and recommended unit is not only its size in height, but its advantage of space saving design. This combination of overall size matched with its storage space allows this box to be the #1 choice within the range. **Features:** • Reinforced stainless steel worktop with integrated side pockets • 8 drawers: 7 shallow (132lb loading capacity, 570x370x65); 1 deep (264lb loading capacity, 570x370x150mm) • Advanced drawer blocking system for anti-tilt protection • Spray can holder (x1) • Paper roll holder • 4 heavy duty casters with 661lb loading capacity each • Total loading capacity of 1984lb • SFS Compatibility: (S,M) • Overall Measurement: 833x1036x518mm P/N 12-06845

SEE OUR WEBSITE FOR OUR COMPLETE SELECTION OF SONIC TOOLS.

WWW.AIRCRAFTSPRUCE.COM

Prices Subject to Change without Notice - Valid as of June 16, 2026.
Please view our website for current prices.

TEKTON TOOLS

TEKTON 1/4 INCH DRIVE 12-POINT SOCKET SET WITH RAIL



11-Piece (5/32-9/16 in.) Tekton 1/4 Inch Drive 12-Point Socket Set with Rail, 11-Piece (5/32-9/16 in.) Large, Stamped Markings - Permanently impressed into the material by a roll-stamp die. - As large as possible while still being readable along the socket's curved surface - Clearly visible size numbers with extra-deep outline

P/N 12-06747

TEKTON 1/4 INCH DRIVE 12-POINT SOCKET SET WITH RAIL AND TRAY



Tekton 1/2 Inch Drive 12-Point Socket and Ratchet Set with Case - 83-Piece (3/8 - 1-5/16 in., 10-32 mm) Large, Stamped Markings - Permanently impressed into the material by a roll-stamp die. - As large as possible while still being readable along the socket's curved surface - Clearly visible size numbers with extra-deep outline.

22-Piece (5/32-9/16 in.) SHD90213

P/N 12-06753

28-Piece (4-15 Mm) SHD90214

P/N 12-06754

TEKTON 1/4 INCH DRIVE SHALLOW 6-POINT UNIVERSAL JOINT SOCKET SET WITH RAIL



Tekton 1/4 Inch Drive 6-Point Shallow Universal Joint Socket Set Compact Design for Tight Spaces. Smooth, Rotating Joints. Shallow 6-Point Socket Opening Prevents Fastener Round-Off. Large, Stamped Markings. Secure Drive Tool Engagement.

7 Piece (1/4-9/16 in.) SHD90109

P/N 12-06749

9-Piece (6-14 Mm) SHD90110

P/N 12-06750

TEKTON - 3/8 INCH DRIVE 12-POINT SOCKET SET WITH RAILS AND TRAY 30-PIECE



Tekton 3/8 Inch Drive 12-Point Socket Set with Rails and Tray. Large, Stamped Markings - Permanently impressed into the material by a roll-stamp die. - As large as possible while still being readable along the socket's curved surface - Clearly visible size numbers with extra-deep outline.

P/N 12-06762

TEKTON 1/4 INCH DRIVE 12-POINT SOCKET AND RATCHET SET WITH CASE - 56-PIECE



Tekton 1/4 Inch Drive 12-Point Socket and Ratchet Set with Case - 56-Piece (5/32-9/16 in., 4-15 mm) Large, Stamped Markings - Permanently impressed into the material by a roll-stamp die. - As large as possible while still being readable along the socket's curved surface - Clearly visible size numbers with extra-deep outline

P/N 12-06774

TEKTON ADJUSTABLE WRENCH



Tekton Adjustable Wrench - 1-1/2 Inch Jaw Capacity. 1-1/2 Inch Jaw Capacity. The adjustable wrench has a 0 to 1-1/2 inch (0 to 38 mm) jaw capacity with high-contrast, laser-engraved scales. Smooth, Fine-Pitch Worm Gear. The fine pitch and tight fit between the worm gear and the teeth prevent the jaw from sliding open during use and allow for smoother, more precise adjustments.

6 Inch Adjustable Wrench WSA04122

P/N 12-06824

9 Inch Adjustable Wrench WSA04222

P/N 12-06825

TEKTON 1/4 INCH BIT DRIVER AND BIT SET WITH CASE (37-PIECE)



S2 Steel Bits. Extra Length - While standard bits are 25 mm long, every bit in this set is 30 mm long to improve your access to recessed fasteners. Corrosion Resistant. The bits are made of S2 steel heat-treated to HRC 58-62. They're coated with a zinc-phosphate coating that resists corrosion.

P/N 12-06663

TEKTON STUBBY COMBINATION WRENCH SET



Tekton Adjustable Wrench - 1-1/2 Inch Jaw Capacity. 1-1/2 Inch Jaw Capacity. The adjustable wrench has a 0 to 1-1/2 inch (0 to 38 mm) jaw capacity with high-contrast, laser-engraved scales. Smooth, Fine-Pitch Worm Gear. The fine pitch and tight fit between the worm gear and the teeth prevent the jaw from sliding open during use and allow for smoother, more precise adjustments.

11-Piece (1/4-3/4 In.) WCB92401

P/N 12-06808

14-Piece (6-19 Mm) WCB92402

P/N 12-06809

TEKTON 3/8 INCH DRIVE CROWFOOT WRENCH SET



Tekton Adjustable Wrench - 1-1/2 Inch Jaw Capacity. The Ultimate Access Tool Fits Where Others Can't. Easy One-Handed Wrench Removal - The wrenches rest in size-marked slots, making it easy to take the tools in and out without resistance. Portable Rack - A narrow lip along the edge of the rack makes it easy to pick up and carry the wrenches to your work piece. Compact Footprint Saves Drawer Space. Durable Single-Piece Polypropylene Construction.

13-Piece (5/16-1 In.) WCF95101

P/N 12-06815

17-Piece (8-24 Mm) WCF95201

P/N 12-06816

TEKTON ANGLE HEAD OPEN END WRENCH SET



Organization Rack - Fits in 2.9in Drawers Organization Pouch - Ideal for On-the-Go - Carry angle head wrenches anywhere with the compact roll-up pouch that keeps wrenches well-packed and unable to slide out. - Durable Material - The polyurethane-backed 600 x 600 denier polyester is both abrasion and tear resistant, and has a Durable Water Repellent (DWR) coating. - Easy-Access Design - The pouch design minimizes bulk from extra material so the wrenches can be quickly accessed without any fabric flaps getting in the way.

Holder 11-Piece (3/8-1 In.) WAE91204

P/N 12-06799

Pouch 11-Piece (3/8-1 In.) WAE91402

P/N 12-06801

Holder 16-Piece (10-27 Mm) WAE92204

P/N 12-06802

TEKTON GROOVE JOINT PLIERS



Sharp teeth on each jaw are angled to work with the direction of operation, creating a high-leverage nonslip bite like a pipe wrench. Fully undercut and interlocking tongue and grooves won't slip or separate under high stress, providing superior joint strength and stability. A nut and bolt fastener allows the operating tension to be adjusted if needed, and unlike permanent rivets it can be used to re-calibrate and maintain performance throughout service life. A broad, rounded handle profile distributes force evenly across your hand to reduce stress and pressure. Slim, nonslip grips add cushion and comfort without adding bulk.

7 Inch (1 In. Jaw Capacity) 37523

P/N 12-06659

10 Inch (1-1/2 In. Jaw Capacity) 37524

P/N 12-06660

16 Inch (4-1/4 In. Jaw Capacity) 37526

P/N 12-06661

TEKTON 7 INCH DIAGONAL CUTTING PLIERS



Blades are finely beveled and induction-hardened to 58-64 HRC to produce a refined semi-flush cut. The 82-degree angle allows for a strong yet sharp blade for a smooth clean cut. Wide, flat handles with slim, nonslip grips provide comfortable fingertip control

P/N 12-06691

TEKTON 6 INCH 70-DEGREE LONG NOSE PLIERS



Long, tapered nose with fine tip is bent to 70 degrees to reach around obstructions. Crosscut teeth distribute force evenly for a sure grip in any direction. Teeth are cut along the full length of jaw, not just at the tip, maximizing useful contact area. Wide, flat handles with slim, nonslip grips provide comfortable fingertip control

P/N 12-06696

TEKTON POINTED PICK AND HOOK SET (5-PIECE)



In The Box: • Straight pointed pick • 45-degree pointed pick • Compound pointed pick • 90-degree pointed pick • 130-degree pointed hook

P/N 12-06691

SEE OUR WEBSITE FOR OUR COMPLETE SELECTION OF TEKTON TOOLS.

RIGGING TOOLS – WRENCH SETS

PAPA ALPHA RIGGING TOOLS



Papa-Alpha rigging tools are essential for ensuring that flight controls remain neutral, promoting safe and responsive handling. Proper rigging keeps control surfaces like ailerons, rudders, and elevators aligned and balanced, preventing unwanted deflections that can compromise aircraft stability.

Our tools are crafted with CAD and CNC routing of aircraft-grade aluminum, powder coated, and UV printed for reduced weight, durability, and precision.

Description	Part No.	Price
PA23 Rudder Reference Tool #1	13-26152	.
PA23 Reference Tool #2	13-26153	.
PA28/32 Rudder Reference Tool #3	13-26154	.
PA28 Rudder Reference Tool #4	13-26155	.
PA28 Rudder Reference Tool #5	13-26156	.
PA28 Rudder Reference Tool #6	13-26157	.
PA31 Rudder Reference Tool #7	13-26158	.
PA32Rt/44 Rudder Reference Tool #8	13-26159	.
PA34 Rudder Reference Tool #9	13-26160	.
PA44 Rudder Reference Tool #10	13-26161	.
PA23 Bellcrank Reference Tool #1	13-26162	.
PA24/30/39 Bell Crank Reference Tool #2	13-26163	.
PA28/32/34 Bell Crank Reference Tool #3	13-26164	.
PA28/32 Bell Crank Reference Tool #4	13-26165	.
PA28/32 Bell Crank Reference Tool #5	13-26166	.
PA28/44 Bell Crank Reference Tool #6	13-26167	.
PA28 Bell Crank Reference Tool #7	13-26168	.

Description	Part No.	Price
PA31 Bell Crank Reference Tool #8	13-26169	.
PA34 Bell Crank Reference Tool #9	13-26170	.
PA38 Bell Crank Reference Tool #10	13-26171	.
PA23 Stabilator Rigging Tool #1	13-26172	.
PA23 Stabilator Rigging Tool #2	13-26173	.
PA24/30 Stabilator Rigging Tool #3	13-26174	.
PA24400 Stabilator Rigging Tool #4	13-26175	.
PA28/32/44 Stabilator Rigging Tool #5	13-26176	.
PA30/39 Stabilator Rigging Tool #6	13-26177	.
PA34 Stabilator Rigging Tool #7	13-26178	.
PA28/32/34/44 Aileron And Flap Rigging Tool #1	13-26179	.
PA34200T/220T Aileron And Flap Rigging Tool #2	13-26180	.
PA-31 Aileron and Elevator Rigging Tool #1	13-26181	.
PA-30/39 Aileron Rigging Tool #1	13-26182	.
PA-36 Flap Rigging Tool #1	13-26183	.
PA31 Rudder Trim Rigging Tool #1	13-26184	.
PA31P Rudder Trim Rigging Tool #2	13-26185	.

SEE OUR WEBSITE FOR OUR COMPLETE SELECTION OF PAPA ALPHA PRODUCTS AND AIRCRAFT ELIGIBILITY

COMBINATION WRENCH SETS



Our ring, open-ended and combination wrenches have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight. The thin-walled diameter of

our rings makes it easier to work in confined spaces. The ring wall is deeper than standard nuts, which prevents jamming.

7/16 Inch To 7/8 Inch - 8 Piece..... P/N 12-06971.....
1/4 Inch To 3/4 Inch -10 Piece..... P/N 12-06972.....
1/4 Inch To 1-1/4 Inch - 20 Piece..... P/N 12-06973.....

QUICKRELEASE SOCKET SET 1/4 INCH DRIVE - 33 PIECE



QuickRelease Socket Set 1/4 Inch Drive - 33 Piece. The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In

transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.

P/N 12-06969.....

QUICKRELEASE SOCKET SET - 3/8 INCH DRIVE - 30 PIECE



STAHLWILLE QuickRelease Socket Set - 3/8 Inch Drive - 30 Piec. The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In

transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.

P/N 12-06970.....

TORQUE WRENCH STANDARD MANOSKOP® WITH FIXED RATCHET



This torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that the spring does not need to be reset to '0' after use.

Size 80 - 160-800 N7M 120-600 Ft-Lb..... P/N 12-06967.....
Size 100 - 200-1000 N7M 150-725 Ft-Lb..... P/N 12-06968.....



QUICKRELEASE RATCHET INSERT ADAPTERS

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.

Size 4 - 9X12 mm - 1/4 Drive 40 N7M..... P/N 12-06960.....
Size 5 - 9X12 mm - 3/8 Drive 100 N7M..... P/N 12-06961.....
Size 10 - 9X12 mm - 1/2 Drive 100 N7M..... P/N 12-06962.....
Size 20 - 14x18mm - 1/2 Drive 200 N-m P/N 12-06963.....

FINE-TOOTH RATCHET INSERT ADAPTER



STAHLWILLE Fine-Tooth Ratchet Insert Adapter. Robust and smooth-running ratchet insert adapter for torque wrenches with a square drive. 60 teeth enable a working angle of only 6° - for efficient working in confined spaces, e.g. in the engine compartment. The reversible mechanism allows quick direction changes without having to

change the plug - optimal for frequently changing screw directions. The integrated ball lock ensures that the socket wrench remains in place even at high torques. Made from durable Chrome Alloy Steel and additionally chrome-plated for maximum durability and wear protection.

Size 5 - 9 X 12 mm 3/8 Drive 100 N7M..... P/N 12-06958.....
Size 10 - 9 X 12 mm 1/2 Drive 100 N7M..... P/N 12-06959.....
Size 20 - 14 X 18 mm 1/2 Drive 300 N7M..... P/N 12-06964.....
Size 40 - 14 X 18 mm 3/4 Drive 400 N7M..... P/N 12-06965.....
Size 40Hd - 14 X 18 mm 3/4 Drive 650 N7M .. P/N 12-06966.....

730 QUICK TORQUE WRENCH SERVICE MANOSKOP® WITH HOLDER FOR INSERT TOOLS



The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.

Size 5 - 6-50 N7M - 5-35 Ft-Lb - 9 X 12 mm..... P/N 12-06958.....
Size 12 - 25-130 N7M - 20-95 Ft-Lb - 14 X 18 mm.... P/N 12-06959.....
Size 20 - 40-200 N7M - 30-144 Ft-Lb - 14 X 18 mm P/N 12-06964.....
Size 40 - 80-400 N7M - 60-300 Ft-Lb - 14 X 18 P/N 12-06965.....
Size 65 - 130-650 N7M - 100-480 Ft-Lb - 14 X 18 mm. P/N 12-06966.....

TO

KNIPEX PRECISION TOOLS



KNIPEX PRECISION-SNAP-RING PLIERS SET

Contains common Precision Circlip Pliers for highest requirements in sturdy plastic packaging, also suitable for storage of the pliers. From 12-25 to 19-60 Straight Tip and 12-25 to 60 Bent Tip.

P/N 15-08431



KNIPEX HIGH LEVERAGE COMBINATION PLIERS

35 % less effort required than with conventional combination pliers easier work due to optimised leverage with cutting edges (hardness approx. 63 HRC) for soft and hard wire and piano wire. Long cutting edges for thicker cables with gripping zones for flat and round material, suitable for versatile use. High-grade special tool steel, forged, oil-hardened, 200mm length. 8 inch.

8 inch Pliers (pictured) P/N 15-08432

8 inch Pliers with Comfort Grip P/N 15-08433

KNIPEX COMBINATION PLIERS



Gripping zones for flat and round material, suitable for versatile use with cutting edges for soft and hard wire. Long cutting edges

for thicker cables cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC Special tool steel, forged, oil-hardened, 8 inch.

P/N 15-08434

KNIPEX HIGH LEVERAGE COMBINATION PLIERS COMFORT GRIP



Gripping zones for flat and round material, suitable for versatile use with cutting edges for soft and hard wire. Long cutting edges for thicker cables cutting edges additionally induction hardened, cutting edge hardness

approx. 60 HRC Special tool steel, forged, oil-hardened, 6.25 inches.

P/N 15-08435

KNIPEX DIAGONAL CUTTERS



The indispensable diagonal cutter for all-round use with high quality material and precise workmanship for long service life. Precision cutting edges for soft and hard

wire, clean cutting of thin copper wires, also at the cutting-edge tips cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC narrow head style for use in confined areas. Vanadium electric steel; forged, oil-hardened, 7.25 inches.

7.25 inch Pliers (pictured) P/N 15-08436

7.25 inc Pliers with Comfort Grip P/N 15-08437

KNIPEX COBRA PLIERS QUICK SET STYLE



Adjustment at the touch of a button directly on the work piece with fine adjustment for optimum adaptation to different sizes of work

pieces and a comfortable handle width. Self-locking on pipes and nuts: no slipping on the work piece and low hand force required. 61 HRC: low wear and stable gripping. Just position the upper jaw to the workpiece, push button and move close the lower jaw, ingeniously simple. 10 Inch

P/N 15-08438



KNIPEX AUTO ADJUSTING WATER PUMP PLIERS

Automatic adjustment per one-hand operation both for right-handed and left-handed use with good access to the workpiece thanks to the slim dimensions in the head and joint area and flush joint bolt. Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required. Gripping surfaces with special hardened teeth, teeth hardness approx.

61 HRC: low wear and stable gripping box-joint design: high stability because of the double guide. Guard prevents operators' fingers being pinched and locking lever for space saving transport with reliable closed handles. Chrome vanadium electric steel, forged, oil-hardened 10 inch.

P/N 15-08439

KNIPEX PLIERS WRENCHES



Adjustable tightening tool, also excellent for gripping, holding, pressing and bending work pieces. Replaces the need for sets of metric

and imperial spanners, with smooth jaws for damage free installation of plated fittings Zero backlash jaw pressure prevents damage to edges of sensitive components. Adjustment at the touch of a button directly on the work piece and parallel jaws give a more solid grip; the construction gives infinite adjustment of all widths up to the specified maximum size.

6 Inch P/N 15-08440

7.25 Inch P/N 15-08441

10 Inch P/N 15-08442

12 Inch P/N 15-08443

KNIPEX PLIERS WRENCH-COMFORT GRIP



Adjustable tightening tool, also excellent for gripping, holding, pressing and bending work pieces. Replaces the need for sets of metric

and imperial spanners, with smooth jaws for damage free installation of plated fittings Zero backlash jaw pressure prevents damage to edges of sensitive components. Adjustment at the touch of a button directly on the work piece and parallel jaws give a more solid grip; the construction gives infinite adjustment of all widths up to the specified maximum size.

6 Inch P/N 15-08444

7.25 Inch P/N 15-08445

10 Inch P/N 15-08446

KNIPEX COBRA PLIERS



Adjustment at the touch of a button directly on the work piece with fine adjustment for optimum adaptation to different sizes of work

pieces and a comfortable handle width. Self-locking on pipes and nuts: no slipping on the work piece and low hand force required. Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC. Box-joint design. Reliable catching of the hinge bolt: no unintentional shifting and guard prevents operators' fingers being pinched. Chrome vanadium electric steel, forged, oil-hardened. Pliers Pictured are without the comfort grip. Pictured without Comfort Grip.

5 inch P/N 15-08447

6 inch P/N 15-08448

7.25 inch P/N 15-08449

7.25 inch with Comfort Grip P/N 15-08452

10 inch P/N 15-08450

10 inch with Comfort Grip P/N 15-08453

12 inch P/N 15-08451

12 inch with Comfort Grip P/N 15-08454

KNIPEX ALLIGATOR PLIERS



More output and comfort compared to conventional water pump pliers of the same length: 9-notch adjustment positioning for

30 % more gripping capacity. Self-locking on pipes and nuts. Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC. Box-joint design. Particularly suitable for outdoor work. Guard prevents operators' fingers being pinched. Chrome vanadium electric steel, forged, oil-hardened. Pictured without Comfort Grip.

7.25 inch P/N 15-08455

7.25 inch with Comfort Grip P/N 15-08458

10 inch P/N 15-08456

10 inch with Comfort Grip P/N 15-08459

12 inch P/N 15-08457

12 inch with Comfort Grip P/N 15-08460

KNIPEX 3PC UNIVERSAL PLIERS SET & ALLIGATOR PLIERS



This 3pc Professional Pliers Set includes: Angled High Leverage Diagonal Cutter 8", Knipex Alligator Water pump Pliers 10", Long Nose Pliers with Cutter 8".

P/N 15-08461



KNIPEX 3PC COBRA PLIERS SET

Knipex 3pc Cobra Pliers Set 7", 10", 12". Adjustment at the touch of a button directly on the work piece with fine adjustment for optimum adaptation to different sizes of work

pieces and a comfortable handle width. Self-locking on pipes and nuts. Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC. Box-joint design. Reliable catching of the hinge bolt. Chrome vanadium electric steel, forged, oil-hardened ... P/N 15-08462

P/N 15-08463

KNIPEX 3 PC ALLIGATOR PLIERS SET



Knipex 3pc Alligator Water pump Pliers 7", 10", 12". More output and comfort compared to conventional water pump pliers of the same length. Self-locking

on pipes and nuts. Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC. Box-joint design. Particularly suitable for outdoor work. Guard prevents operators' fingers being pinched. Chrome vanadium electric steel, forged, oil-hardened.

P/N 15-08463



KNIPEX 3PC UNIVERSAL PLIERS SET & COBRA PLIERS

This 3pc Professional Pliers Set includes: Angled High Leverage Diagonal Cutter 8", Knipex Cobra Water pump Pliers 10", Long Nose Pliers with Cutter 8" P/N 15-08464



KNIPEX 2 PC MINI PLIERS WITH BELT POUCH

Knipex 2pc Mini Pliers Set includes: Knipex Pliers Wrench 6", Knipex Cobra Pliers Wrench 5".

P/N 15-08465

DRILLS - TAPS - DIES

AIRCRAFT GRADE SUPER COBALT DRILLS

These super cobalt hi-speed jobber length aircraft drill bits feature heavy duty construction to Type J aircraft specifications. Use to drill hard, tough metals, stainless steels, iron based and titanium alloys, and certain plastics. Hardness of cobalt permits speeds 30% over regular H.S.S. drills. Cobalt drills demand rigidly held, positive feed drilling equipment.

Part No.	Drill Size	Price Ea.	Part No.	Drill Size	Price Ea.
12-03791	55	.	12-04220	23	.
12-03698	51	.	12-14221	21	.
12-03792	44	.	12-04221	19	.
12-04212	42	.	12-04222	12	.
12-04213	41	.	12-04223	10	.
12-04214	40	.	12-04224	"D"	.
12-04215	36	.	12-04225	1/8"	.
12-04216	33	.	12-04226	5/32"	.
12-03793	37	.	12-04227	3/16"	.
12-04217	30	.	12-04228	1/4"	.
12-04218	28	.	12-04229	5/16"	.
12-04219	27	.	12-04235	#35	.

12" LONG DRILL BITS

These 12" long drill bits are for use with standard electric drills for the hard to reach jobs.

Drill	Size	Part No.	Price
3/32"	(.094")	12-05200	.
1/8"	(.125")	12-05300	.
3/16"	(.188")	12-05400	.
#10	(.194")	12-05500	.
1/4"	(.250")	12-05600	.

MALE THREADED DRILL BITS

Male threaded drill bits of high speed steel screw into female spindle of angle drill or snake drill.

Drill	10-32 Thread		1/4-28 Thread	
Size	Part No.	Price	Part No.	Price
#10	12-05701	.	12-05702	.
#20	12-05801	.	12-05802	.
#21	12-05901	.	12-05902	.
#30	12-06001	.	12-06002	.
#40	12-06101	.	12-06102	.

ANGLE DRILL ATTACHMENT

Quickly connects to any drill chuck. Makes a convenient, inexpensive close-quarter tool. 3/16 drill capacity.

Specify threaded spindle size: 5/16-24 (P/N 12-18503), 1/4-28 (P/N 12-18501) or 10-32 (P/N 12-18502).....
Angle Drill w/ Key Chuck (1/4-28 Only).....P/N 12-18511.....

SNAKE DRILL ATTACHMENT

Heavy-duty 90° flexible drilling attachment. Overall length 26". 3 Female threaded spindle sizes.
1/4-28P/N 12-06500.....
10-32P/N 12-06600.....
w/key chuck (5/32"cap) ..P/N 12-06800.....

CONE JAW CHUCK

Heavy duty yet mini size fits any angle drill or attachment with 1/4" x 28 threads. It's just what you need for close quarter drilling. **Features:** • Capacity from 1/16" to 1/4" 3/4" length, 0.13 lbs • Wrench included.
P/N 12-00245.....

ANGLE DRILL COLLET & CHUCK KIT

This 10-piece kit gives you 3 different methods of drilling in tight spots. Each shank is 1/4" x 28 which will thread into most drill spindles that angle attachments and angle drills are supplied with. 0.25 lb.
Kit Includes: • (4) #200 collets & adapters - drill sizes 11, 21, 30, & 40 • (4) threaded drill bits (1-1/4" length) - drill sizes: 10,21,30,40 • (1) Cone jaw chuck
Model TP258P/N 12-00368.....

TAP EXTRACTOR SETS

Remove broken taps and save the threads! Walton Tap Extractors let you remove broken taps without drilling, lasers, damaged threads, scrapped parts or repair inserts. The hardened steel fingers of Walton Tap Extractors fit in the flutes of a broken tap to back it out simply and safely. This effective method has been used since 1908. They are available in every tap size, both inch and metric, as handy sets or individual pieces. The Tap Extractors will fit both NC and NF taps. Sizes: 3/16", 1/4", 5/16", 3/8", 7/16", 1/2" P/N 12-02352.....

HAND THREAD TAPS

There are three basic types of straight thread taps:

PLUG TAPS - used for ordinary threading and have a 3 to 5-thread chamfer, or relief, at the point.

TAPER TAPS - have 8 to 10 threads chamfered for easy starting and are used for tough threading jobs.

BOTTOMING TAPS - with their short chamfer (1 to 1-1/2 threads), are used where the thread must go to the bottom of the hole.

Specify Plug, Taper or Bottoming Tap.

PLUG TAPS

Die Size	Left-Hand	Right-Hand
6-32	12-07601	12-07701
8-32	12-07801	12-07901
10-32	12-08001	12-08101
1/4-28	12-08201	12-08301
5/16-24	12-08401	12-08501
3/8-24	12-08601	12-08701

TAPER TAPS

Die Size	Left-Hand	Right-Hand
6-32	12-07602	12-07702
8-32	12-07802	12-07902
10-32	--	12-08102
1/4-28	12-08202	12-08302
5/16-24	12-08402	12-08502
3/8-24	--	12-08702

BOTTOMING TAPS (HIGH-SPEED STEEL)

Die Size	Left-Hand	Right-Hand
6-32	--	12-07703
8-32	--	12-07903
10-32	12-08003	12-08103
1/4-28	--	12-08303
5/16-24	--	12-08503
3/8-24	--	12-08703

DRILLING & TAPPING SETS

13-Piece drilling and tapping set made from special high speed steel. Contains 6 screw machine length drill bits (Nos. 43, 35, 29, 25, 21 and 7), 16 NC taps (4-40, 6-32, 8-32, 10-24, 10-32 and 1/4-20) and one tap wrench. Choice of 135° split point or spiral point drill bits. Set with Split-Point Drill Bits.....P/N 41095.....

ADJUSTABLE ROUND SPLIT DIES

Die Size	Die Dia.	Left-Hand	Right-Hand
6-32	13/16"	12-07001	12-07002
8-32	13/16"	12-07101	12-07102
10-32	13/16"	12-07201	12-07202
1/4-28	1"	12-07301	12-07302
5/16-24	1"	12-07401	12-07402
3/8-24	1"	12-07501	12-07502

ROUND "KNOCK-OUT" PUNCHES & DIES

Save hours of tedious drilling, sawing, filing and hand-fitting. Produce clean, true holes for sockets, controls, instruments. Cut clean, burr-free holes with these easy-to-use tools. Can be operated by ordinary wrench. One punch required for each hole size.

Punch Size	Model 730 P/N	Price	Punch Size	Model 730 P/N	Price
1/2"	12-20905	.	1-1/2"	12-20950	.
5/8"	12-20910	.	1-5/8"	12-20955	.
3/4"	12-20915	.	2"	12-20970	.
1"	12-20925	.	2-1/4"	304AVBB	.
1-7/32"	12-20935	.	3-1/8"	12-20980	.
1-1/4"	12-20940	.			

ROUND DIE STOCK HANDLES

For holding adjustable round split dies. Three set screw pattern. Single piece construction. Die diameter 1" or 13/16".

13/16"P/N 12-04875.....
1"P/N 12-04876.....

TO

DRILL BITS

CARBIDE DRAGGER DRILL BITS



Reference NAS 965 specification with special geometry for drilling composite and composite stack ups.

Size	Carbide	4" Part No.	Price	6" Part No.	Price
#40	3000-0980	12-04547	---	---	---
1/8	3000-1285	12-04549	---	12-04552	.
#21	3000-1590	12-04551	.	12-04552	.
#13	3000-1875	12-04553	---	12-04554	.
#11	3000-1935	12-04555	.	12-04556	.
#2	3000-2210	12-04557	.	---	---
1/4	3000-2500	--	---	---	---
G	3000-2610	--	---	12-04560	---

HSS EXTENSION DRILL BITS



NAS 907 Type "B" and Type "J" 135° Split Point

These aircraft extension drills are manufactured to provide long life. Our cobalt drills are used for drilling in tough, high tensile strength materials like stainless steel titanium and inconel. A heavy duty flute design is incorporated and a 135° split point.

Size	Length	Part No.	Price
3/32	6 inches	12-04202	.
40		12-04204	.
1/8		12-04234	.
#30		12-04236	.
#21		12-04247	.
#10		12-04260	.
1/4		12-04274	.
3/32	12 Inches	12-04391	.
40		12-04393	.
1/8		12-04404	---
#30		12-04405	.
#21		12-04417	.
#10		12-04430	.
1/4		12-04444	.

VISIT WWW.AIRCRAFTSPRUCE.COM FOR A FULL LIST OF AVAILABLE SIZES.

COBALT EXTENSION DRILL BITS



Size	Length	Part No.	Price
3/32	6 inches	12-04307	.
40		12-04309	.
1/8		12-04320	.
#30		12-04321	.
#21		12-04332	.
#10		12-04345	.
1/4		12-04359	.
3/32	12 Inches	12-04476	.
40		12-04478	.
1/8		12-04489	.
#30		12-04490	.
#21		12-04501	.
#10		12-04514	.

VISIT WWW.AIRCRAFTSPRUCE.COM FOR A FULL LIST OF AVAILABLE SIZES.

HSS 1/4-28 MALE THREADED DRILL BITS



High Speed Steel

- Type B Threaded Hex Shank HSS Adaptor
- Drill - NAS 965 1/4-28 UNF Class 2A Thread
- Surface Treated-Steam Oxide
- Drills are manufactured to NAS 965 Type B construction.
- High Speed Steel drills are for drilling general to medium duty, low tensile strength materials in confined areas.

Size	Length	Part No.	Price
3/32	1/2 inch	12-04065	.
#40		12-04066	.
1/8		12-04077	.
#30	9/16 inch	12-04078	.
5/32		12-04087	.
#21		12-04089	.
#10		12-04103	.
#9	5/8 inch	12-04104	---
13/64		12-04107	.
7/32		12-04112	---
1/4		12-04120	.
3/32	1 inch	12-03941	.
#40		12-03942	.
7/64		12-03947	.
1/8		12-03954	.
#30	1-1/4 inch	12-03955	.
5/32		12-03964	.
#21		12-03966	.
#10		12-03979	.
3/32	2-1/8 inch	12-03814	.
#40		12-03815	.
1/8		12-03826	.
#30		12-03827	.
#21		12-03838	.

VISIT WWW.AIRCRAFTSPRUCE.COM FOR A FULL LIST OF AVAILABLE SIZES.

COBALT 1/4-28 MALE THREADED DRILL BITS



Cobalt

- Type D Threaded Square Shank Cobalt Adaptor
- Drill NAS 965 1/4-28 UNF Class 2A Thread
- Surface Treated-Steam Oxide
- Drills are manufactured to NAS 965 Type D construction.
- Cobalt drills are for drilling hard, tough, high tensile strength materials in confined areas.

Size	Length	Part No.	Price
3/32	1/2 inch	12-04127	.
#40		12-04128	.
#30		12-04140	.
5/32	9/16 inch	12-04149	.
#21		12-04151	.
#10		12-04166	.
5/16	3/4 inch	12-04187	.
3/8		12-04188	---
3/32	1 inch	12-04004	---
#40		12-04005	.
7/64		12-04010	.
1/8	1-1/4 inch	12-04016	.
#30		12-04017	.
5/32		12-04026	.
#21		12-04028	.
#10	2-1/8 inch	12-04041	.
3/32		12-03875	.
#40		12-03876	.
1/8		12-03887	.
#30		12-03888	.
#21		12-03899	.

VISIT WWW.AIRCRAFTSPRUCE.COM FOR A FULL LIST OF AVAILABLE SIZES.

COBALT DRILL BIT SETS

COBALT DRILL BIT SET 1-60 PIECES



Numbered 1 - 60 Drill Bit Set Cobalt. Tired of always looking for that drill bit you desperately need? Now you can have all of them right at you fingertips. All Index boxes are the highest quality made. Made in the U.S.A. 60 total pieces plus index box. 135 degree split point (**Note:** Bits smaller than .0625 have no split point)P/N 12-05110

COBALT DRILL BIT SET 1/16-1/2 INCH 29 PIECES



Fractional 1/16" - 1/2" 60 Drill Bit Set Cobalt. Tired of always looking for that drill bit you desperately need? Now you can have all of them right at you fingertips. All Index boxes are the highest quality made. Made in the U.S.A. 29 total pieces plus index box. 135 degree split point
P/N 12-05111

DRILL BIT SET A-Z COBALT 26 PIECES



Letters A - Z Drill Bit Set Cobalt.. Tired of always looking for that drill bit you desperately need? Now you can have all of them right at you fingertips. All Index boxes are the highest quality made. Made in the U.S.A. 26 total pieces plus index box. 135 degree split point
P/N 12-05112

DRILL BIT COMBO COBALT ALL BITS 115 PIECES



Combo Set Includes Cobalt: Numbers, Letters & Fractional. Tired of always looking for that drill bit you desperately need? Now you can have all of them right at you fingertips. All Index boxes are the highest quality made. Made in the U.S.A. Complete set in Index Box. 135 degree split point (**Note:** Bits smaller than .0625 have no split point)
P/N 12-05113

DRILL BIT SET 1-60 NUMBERS HIGH SPEED



Numbered 1 - 60 Drill Bit Set High Speed. Tired of always looking for that drill bit you desperately need? Now you can have all of them right at you fingertips. All Index boxes are the highest quality made. Made in the U.S.A. 60 total pieces plus index box. 135 degree split point (**Note:** Bits smaller than .0625 have no split point) P/N 12-05114

DRILL BIT SET 1/16-1/2 INCH FRACTIONS 29 PIECES



Drill Bit Set Fractions 1/16-1/2 High Speed. Tired of always looking for that drill bit you desperately need? Now you can have all of them right at you fingertips. All Index boxes are the highest quality made. Made in the U.S.A. 29 total pieces plus index box. 135 degree split point (**Note:** Bits smaller than .0625 have no split point) P/N 12-05115

DRILL BIT SET A-Z HIGH SPEED USA 26 PIECES



Letters A - Z Drill Bit Set High Speed. Tired of always looking for that drill bit you desperately need? Now you can have all of them right at you fingertips. All Index boxes are the highest quality made. Made in the U.S.A. 26 total pieces plus index box. 135 degree split point (**Note:** Bits smaller than .0625 have no split point)P/N 12-05116

DRILL BIT COMBO HIGH SPEED ALL BITS 115 PIECES



Combo Set Includes High-Speed: Numbers, Letters & Fractional. Tired of always looking for that drill bit you desperately need? Now you can have all of them right at you fingertips. All Index boxes are the highest quality made. Made in the U.S.A. Complete set in index box. 135 degree split point (**Note:** Bits smaller than .0625 have no split point)
P/N 12-05117

TO

DRILL BIT SETS - CARBIDE DRILLS & BURS



DRILL BIT SET - SIZES 1-60

This jobber length drill bit set includes high speed steel (HSS) drill bits in sizes 1-60. The set comes complete with a steel storage box. Ideal as a pre-drill for tapping of holes and for many other aircraft building applicationsP/N 12-00227



29-PC BRITE FLUTE DRILL SET

This 118° point, high speed steel (HSS) drill set performs well in a wide variety of drilling applications. It is recommended for non-ferrous metals, wood, and plastics. Set includes 29 pcs (1/16 to 1/2" in 64ths in metal index).....P/N 12-00537



115-PC HSS JOBBER LENGTH DRILL SET

This 118° point, high speed steel (HSS) drill set performs well in a wide variety of drilling applications. It is recommended for non-ferrous metals, wood, and plastics. Set includes 115 pcs (1/16 to 1/2" by 64ths and #1-60 and A-Z in metal index).

P/N 12-00536

STRAIGHT FLUTE CARBIDE DRILLS

For use on hardened, treated, and abrasive materials, stainless steel, cryogenic alloys.



Part No.	Cutting Dia.	Decimal Equiv.	Flute Length	Overall Length	Price
12-00538	13/64	.2031	1-3/16	2-1/4	.
12-00539	7/32	.2188	1-1/4	2-3/8	.
12-00540	1/4	.2500	1-3/8	2-1/2	.
12-00541	9/32	.2812	1-1/2	2-11/16	.
12-00542	5/16	.3125	1-5/8	2-13/16	.
12-00543	3/8	.3750	1-13/16	3-1/8	.
12-00544	1/2	.5000	2-1/4	3-3/4	.
12-00545	1/8	.1250	7/8	1-7/8	.
12-00546	9/64	.1406	15/16	1-15/16	.
12-00547	5/32	.1562	1	2-1/16	.
12-00551	3/16	.1875	1-1/8	2-3/16	.

CARBIDE TWIST DRILLS

For use on non-ferrous alloys, cast iron, plastics, aluminum, and highly abrasive materials



Part No.	Cutting Dia.	Decimal Equiv.	Flute Length	Overall Length	Price
12-00579	1/16	.0625	3/4	1-1/2	.
12-00580	5/64	.0781	7/8	1-3/4	.
12-00581	3/32	.0938	1	2	.
12-00582	7/64	.1094	1-1/4	2-1/4	.
12-00583	1/8	.1250	1-1/4	2-1/4	.
12-00585	5/32	.1562	1-3/8	2-1/2	.
12-00586	11/64	.1719	1-5/8	2-3/4	.
12-00547	3/16	.1875	1-5/8	2-3/4	.
12-00548	13/64	.2031	1-3/4	3	.
12-00549	7/32	.2188	1-3/4	3	.
12-00552	15/64	.2344	2	3-1/4	.
12-00554	17/64	.2656	2-1/8	3-1/2	.
12-00557	9/32	.2812	2-1/8	3-1/2	.
12-00558	5/16	.3125	2-3/8	3-3/4	.
12-00561	11/32	.3438	2-1/2	4	.
12-00563	3/8	.3750	2-3/4	4-1/4	.
12-00564	7/16	.4375	2-7/8	4-1/2	.
12-00567	1/2	.5000	3	4-3/4	.

CARBIDE ROTARY - RADIUS END

Rotary files have a 1/4" shank and a double-cut (self-cleaning) burrs for quicker cutting speed and less chip build-up. Style: Cylindrical Radius End (SC-5). Diameter of cut: 1/2". Length of cut: 1"P/N 12-02917

CARBIDE ROTARY FILE - BALL END

Rotary files has a 1/4" shank and a double-cut (self-cleaning) burrs for quicker cutting speed and less chip build-up. Style: Round ball (SD-1). Diameter of cut: 1/4". Length of cut: 7/32"P/N 12-02918

SPIRAL FLUTE CHUCKING REAMER

High speed steel straight shank spiral flute chucking reamer. Diameter tolerance thru 1/2 diameter + .0002.0000. Decimal Equivalent: 0.0980. Shank Type: Straight Shank. Flute Type: Spiral Flute. Size Type: Wire Gage Size. Flute Length: 7/8. Overall Length: 3-1/2. Material: High Speed Steel. Size: 40. Type: Straight Shank / Spiral Flute. Number of Flutes: 4 Flute. Brand Name: Quality Import.

Size 30P/N 12-02930
High Speed, Size 30P/N 12-02931

ALUMINUM CUT

Designed for use on aluminum, non-ferrous metals, soft steel, reinforced plastics, and other soft materials.

CYLINDRICAL BALL NOSE CARBIDE BURS

Aluminum Cut. 1/4" shank.



Part No.	Dia.	Flute Length	Price
12-00588	1/4	5/8	.
12-00589	3/8	3/4	.
12-00590	1/2	1	.



CYLINDRICAL CARBIDE BURS

Aluminum Cut. 1/4" shank.

Part No.	Dia.	Flute Length	Price
12-00591	1/4	5/8	.
12-00592	3/8	3/4	.
12-00593	1/2	1	.



ROUND NOSE TREE CARBIDE BURS

Aluminum Cut. 1/4" shank.

Part No.	Dia.	Flute Length	Price
12-00594	1/4	5/8	.
12-00595	3/8	3/4	.
12-00596	1/2	1	.

MEDIUM TOUGH CUT

Engineered specifically for tough applications. Tough cut insures faster, splinter-free cutting in weld & alloy castings with increased tool life.



CYLINDRICAL BALL NOSE CARBIDE BURS

Medium Tough Cut. 1/4" shank. 6" Long.

Part No.	Diameter	Flute Length	Price
12-00597	3/8	3/4	.
12-00598	1/2	1	.



ROUND NOSE TREE CARBIDE BURS

Medium Tough Cut. 1/4" shank. 6" Long.

Part No.	Diameter	Flute Length	Price
12-00599	3/8	3/4	.
12-00601	1/2	1	.



14° INCLUDED ANGLE CARBIDE BURS

Medium Tough Cut. 1/4" shank. 6" Long.

Part No.	Diameter	Flute Length	Price
12-00602	3/8	1-1/16	.
12-00603	1/2	1-1/8	.



CARBIDE ROTARY FILE - 8 PIECE SETS

8 Piece Carbide Rotary File Set. 1/4" or 1/8" shaft available.

1/8" SetP/N 12-02916
1/4" SetP/N 12-02915

VICE GRIPS - UNIBITS



Locking Pliers,
two straight jaws



Locking Pliers,
two curved jaws



Locking Nose Jaw with
wire cutter



"C" Clamps

Vise-Grip Style	Size	Part No.	Price
Locking Pliers with Two Straight Jaws	7"	12-00196	.
Locking Pliers with Two Curved Jaws and Wire Cutter	4"	4WR	.
	5"	12-00194	.
	7"	12-00189	.
Long Nose Jaws with Wire Cutter	4"	12-00190	.
Locking "C" Clamps	6"	12-00188	.
	11"	12-00195	.

TIGHT-FIT DRILL KIT



Space, every inch of it, is at a premium in aircraft design as shape and weight is critical to function. Also, airplanes are riveted together which requires thousands of holes to be drilled in difficult locations without scratching or marring the work surface. So, engineers needed to design a versatile "chuck-less" drill attachment that could reach into very confined areas. The answer was found in putting threads on the shanks of drill bits. The benefits are significant. Threaded drill bits eliminate the need for a chucking mechanism. Freed of this restriction, it is possible to do a wide variety of jobs in places with extreme space limitations (less than 1" x 2"). Chuck slippage is all but eliminated while the precision mating angle between threaded drill and drive spindle insures concentricity. Drill bit change times are reduced, an exact working drill bit length is insured and the chance of marring or scratching the work surface is greatly reduced. The Model 00105 Kit includes: a versatile close-quarter Right Angle Drill Attachment capable of drilling up to 1/4" diameter holes and compatible with all standard power drills, a 6" Threaded Extension for those deep hard-to-reach spots, a Chucking Spud which allows direct use of threaded TightFit® drill bits and extensions with your standard drill motor, five aircraft quality threaded TightFit® drill bits (Short Drill Bit Set, 00133), a Tight Fit® 3-Way Wrench, and is packaged in a red, heavy-duty, blow-molded storage case. Features: Attaches to any power drill; Recommended operating speed not to exceed 2500 rpm. • Light weight; Right angle drill weighs 1/3 of a pound and rotates 360 degrees for tight-spot access. • Threaded components allow for fast, easy tool changes; Drill over, under or around obstructions. • Design allows "deep reach" in confined areas; Provides utility of extension drill bit set.

P/N 12-01334\$58.75

ACCESSORIES

Stub Drill Kit - 5 Drills 9/16" long in 3/32", 1/8", 5/32", 3/16", 1/4" Dia.

P/N 12-20310

Short Drill Kit - 5 Drills 1-1/8" long, in same diameters as above

P/N 12-20320

Long Drill Kit - 5 Drills 2" long in same diameters as above.

P/N 12-20330

Screwdriver Set - #1 & #2 Phillips bits, small & large slotted bits.

P/N 12-20340

Extension Set - 4 Extensions in 1/2", 3" 6" & 9" (can be combined for a work length of 18")

P/N 12-20350

Collet Adapter - Designed to hold all 1/4" shank accessories (counter-sinks, rotary files, sanding drums).....P/N 12-20360

DELUXE TIGHT FIT TOOL KIT PROFESSIONAL MODEL



- 1- Right angle drilling attachment
- 1- 6" Threaded Extension Rod
- 1- Chucking spud
- 1- 5/16" Threeway Wrench
- 12- Threaded Shank Drill Bits (Split into a quantity of 6 each)
- 6- Stub drill bits in the following diameters:
 - 3/32", 1/8", 5/32" 3/16", 7/32" and 1/4"
- 6- Stub Bits (1-1/2") in the same diameter.
- 4- Screwdriver Bits Set: Phillips #1 & #2 and Slotted

#3-#4, & #6-#8.

• 2- 1/8" & 1/4" Threaded Collets

• 1- 5/16" Combination Wrench

• 1- Pro Kit Red Storage CaseP/N 12-11215

FLANGING-360 TOOL



This is a companion tool to the ARC-360 lightning hole cutter. The Flanger-360 will form a 30 degree flange on 2024-T3 aircraft aluminum up to .032" thick and in diameters from 2 to 6 inches. Its polished hardened steel rollers gently and effortlessly form the flange as the operator rotates the tool around the lightning hole. Unlike other flanging tools that rely on the skill and eye of the operator, the Flanger-360 stays in constant position with the lightning hole via guide rollers as it progressively forms the flange.....P/N 12-02030

UNIBIT STEP DRILL

The UNIBIT Step Drill uses a unique single flute design to drill perfectly round holes in thin materials quickly and with less effort than any other bit on the market today. UNIBIT incorporates cutting steps of progressively larger diameter, making it possible to drill up to 13 different hole sizes with a single bit. Once the desired hole diameter is obtained, the hole is automatically deburred by the cutting edge of the next larger step. UNIBIT #1 drills 13 holes in 1/32" increments from 1/8" through 1/2" and has a shank size of 1/4". UNIBIT #2 drills 6 sizes of holes from 3/16" through 1/2" and has a 3/8" step thickness with a 1/4" shank. UNIBIT #3 drills 9 sizes of holes from 1/4" to 3/4" and has a step thickness of 1/8" with a 3/8" shank. UNIBIT #5 drills holes 1/4" - 1-3/8". 10 steps. UNIBIT #21 drills 13/16"-1-3/8". 10 steps.



Description	Part No.	Price
UNIBIT #1 Step Drill	12-03700	.
UNIBIT #2 Step Drill	12-03800	.
UNIBIT #3 Step Drill	12-03900	.
UNIBIT #4 Step Drill	12-03164	.

LOCKING C-CLAMP WITH SWIVEL 6 INCH



Locking C-Clamp W/Swivel Pad, 6 In. **Specifications:** Size: 6", Capacity (In.): 2, Throat Depth (In.): 1 1/8, Clamping Force (Lb.): 500, Locking Mechanism: Release Lever, Screw Mechanism: Adjusts Clamping Pressure, Pliers Length (In.): 7 11/16, Finish: Nickel Plated, Material: Hardened Carbon Steel, Standards: ASME B107.36-2002

P/N 12-02422

CLAMPS – SHEARS - NIBBLERS



Right Hand Shears.....P/N 01-00397

INDUSTRIAL FABRIC SHEARS

Wiss No. 20W heavy-duty shears, ideal for cutting fiberglass cloth and all fabrics. Hot drop-forged steel.

CORDLESS ELECTRIC KEVLAR SCISSOR KIT



The USATCO cordless electric kevlar scissor kit cuts aramid fibers, kevlar and other tough materials! Lightweight and maneuverable with superior ergonomic design. Requires much less effort than cutting manually. Short rapid strokes for intricate work. This can be operated with cord and adapter for unlimited cutting time.

P/N 12-02630



NARROW TYPE FLUTING PLIERS

Designed for work on aircraft components. No-mar fluting plier jaws have special coating that will not scratch surfaces. An inexpensive quality tool.

P/N 12-05628



QUICK GRIP BAR CLAMPS

From the makers of Vise-Grip tools comes the amazing new Quick-Grip bar clamp. The unique pistol-grip handle lets woodworkers hold the clamp and adjust jaw pressure with just one hand. One finger unlocks the Quick-release trigger. Features include positive locking action to hold work tight, strong, lightweight high-tech construction, instant adjustable clamping pressure, large, pliable pads that won't mar work, and a variety of jaw openings. It will "single-handedly" change the way you think about bar clamps!

Part No.	Jaw Opening Size (mm)	Price
12-03910	6"/150	.
12-03920	2"/305	.



STEEL SPRING CLAMPS

This nickel-plated steel spring clamp is ideal for gluing, assembly and welding work. The comfortable vinyl coated handle makes it easy to open the clamp for 2" wide placement and the tempered spring ensures a strong hold. Keep several on hand for all projects.

P/N 12-03778



CUSHIONED CABLE CLAMP (ADEL CLAMP) INSTALLATION PLIERS

These special pliers allow for greatly simplified installation of single or multiple Adel type cushioned clamps. The pliers securely hold the aligned clamps in position, allowing for easy installation of securing hardware. Each kit includes special plier, alignment awl, and simple instructions.

P/N 12-02017

KETT PORTABLE POWER SHEARS



DOUBLE-CUT SHEARS KD-400

Variable-speed, double-cut shears feed quickly and quietly, without warping or bending your finished piece (distortion is in the waste strip). It easily follows a scribed line. The materials edges are not hardened or burred, so you get maximum use of a sheet. The swiping action of blades seals the edge of coated metals. These shears cut C.R. mild steel up to 18 gauge in straight or contour lines at over 300 inches per minute, most grades of stainless, aluminum to .080 and plastic or Formica up to 3/32" thick. These shears are also available with a contour cutting blade 60-21C to cut tighter curves and the HS blade 60-21HS for cutting foam filled doors.....P/N 12-03806



ELECTRIC MODEL K-442

Kett's all-purpose 16 gauge power shears cut up to 16 gauge mild steel, cleanly and easily, without burring or buckling the material. These lightweight shears, designed for durability, feature a variable speed motor and fill the gap between Kett's light duty and heavy duty power shears.

P/N 12-01153



PNEUMATIC MODEL P-500

Equipped with air-metering trigger for variable-speed cutting, so that initially the blade can be operated slowly to prevent chattering at start of cut. 2600rpm. Maximum cutting speed, 180" per min. Wt. 3 lbs. Over-all length, 9".

P/N 12-01158



KETT KD440 14GA POWER SHEARS

Cuts 14 gauge mild steel and most grades of stainless to 16 gauge. Cuts over 150 inches/minute, leaving a clean, flat sheet, ready to fabricate. Distortions are absorbed in an easily disposed of waste curl, leaving the sheet cool and free of burn, chips, and burrs. The cutting blades are finest high speed steel. (Also cuts sheet metal, Stainless and Plastics)P/N 12-00676



KETT KD-446R PROFILE SHEARS

Cuts profile and flat materials up to 18 gauge, spiral duct, wire mesh and many other materials. Can cut tight curves at a radius of three inches. The blades are made of high quality steel, heat treated and precision ground. The motor is variable speed up to 2500 RPM and cuts up to 28 feet per minute.

Features: • 5.0 amp pistol grip • Replaceable A-2 tool steel shear blades. • These snips cuts C.R. mild steel 18 gauge and lighter, wire mesh to 18 gauge, spiral pipe, metal studs and corrugated metal Left Hand.....P/N 12-02509

VAMPLIERS

VAMPLIERS MINI SCREW REMOVAL PLIERS



- Remove stripped/rusted/corroded/stuck/one-side/Torx screws, nuts and bolts.
- Designed with VamPLIERS™ Technology.
- Target screws can be extracted using top jaw or side jaw.

- Perfect slim nose for access confined spaces.
- ESD safe handle (1x106 ~ 107 O • sq)
- Ergonomic elastomer handles for unmatched comfort.
- RoHS Compliant for use in various industries.
- Made in Japan from high carbon stainless steel.

P/N 12-04717

VAMPLIERS PRO SCREW REMOVAL PLIERS



- Remove stripped/rusted/corroded/stuck/one-side/Torx screws, nuts and bolts.
- Designed with VamPLIERS™ Technology.

- Target screws can be extracted using top jaw or side jaw.
- Ergonomic elastomer handles for unmatched comfort.
- Wire cutters hardened to HRC58±2 (Rockwell standard).
- RoHS Compliant for use in various industries.
- Made in Japan from high carbon stainless steel.

P/N 12-04718

VAMPLIERS SCREW REMOVING PLIERS



The amazing Vampliers doubles as a regular pair of pliers, as well as a handy and effective screw remover. It uses a patented vertical and horizontal serration pattern to clamp onto screws (even if they are completely

stripped) and remove them. Of course, it can also be used as a regular pair of pliers which features built-in wire cutters and wire strippers.

P/N 12-04716

VAMPLIERS SLIP JOINT STRIPPED SCREW REMOVAL PLIERS



These Slip Joint VamPLIERS have the signature concave shaped jaws with vertical and horizontal serrations designed inside of the jaws. This which gives the perfect bite around a

stripped/rusted/corroded screw, nut or bolt for extraction. Compared to its predecessor, these jaws are wider to tackle bigger problem screws. Adding to its big bite is the "slip-joint" feature made with reversed body structures that allows the jaws to adjust and firmly take on bigger screws, nuts, and bolts!.....P/N 12-04719

VAMPLIERS KIT



VamPLIERS have a signature concave shaped jaws with vertical and horizontal serrations designed inside of the jaws. This which gives the perfect bite around a stripped/rusted/corroded screw, nut or bolt for extraction. This kit features a pair of the VT001-8 VamPLIER Pro Pliers, VT001-5 Mini Pliers, and the VT001-7SJ VamPLIER Slipjoint to cover all your rusted screw problems P/N 12-04720

VAMPLIER TOOL POUCH



Keep your VamPLIERS all in one place. This handy case has five individual pouches to hold your tools, and rolls up to save space in your toolbox. Note: Does not include VamPLIERS.

P/N 12-04721

VAMPLIERS® RECESSED SCREW EXTRACTOR WITH 2-IN-1 BIT SET



High Quality Screw Extractor for recessed stripped screws. Easily removes stripped or damaged flathead, countersunk, and recessed screws. Saves time – No preparation required. No messy drilling required. High-Torque handle grip. 2-in-1 bit set for slightly-damaged and heavily-damaged screws.

P/N 12-05062

VAMPLIERS® SCREW REMOVAL PLIERS

Remove stripped/rusted/corroded/stuck/one-side/Torx screws, nuts and bolts. Designed with patented VamPLIERS® Technology. Long Nose ideal for hard-to-reach screws up to 5.5mm in diameter and 2.2mm in height. Wire cutters hardened to HRC60±2 (Rockwell standard) to handle tough screws. Serrations in between grips used as wire pullers. Top teeth are inter-meshed for non-slip grip. Ergonomic elastomer handles for unmatched comfort T-Shaped forged handles prevent the grip covers from twisting or slipping off. RoHS compliant for use in various industries. Made in Japan from high carbon stainless steel.

Description	Part No	Price
Long-Nose 7.5 Inch Screw Extraction Pliers	12-05052	.
2 Piece Set S2A 5 Inch Mini and 6.25 Inch	12-05053	.
2 Piece Set S2B 6.25 Inch and 7 Inch	12-05054	.
2 Piece Set S2C 7 Inch and 8 Inch	12-05055	.
2 Piece Set S2D 6.25 Inch and 8 Inch	12-05056	.
3 Piece Set S3A 5 Inch Mini, 6.25 Inch, and 7 Inch	12-05057	.
3 Piece Set S3B 6.25 Inch, 7 Inch, and 8 Inch	12-05058	.
3 Piece Set S3C 5 Inch, 6.25 Inch, and 8 Inch	12-05059	.
4 Piece Set S4AP 5 Inch Mini, 6.25 Inch, 7 Inch, and 8"	12-05061	.

VAMPLIER ALL-IN-ONE ELECTRICAL SHEARS / CRIMPER



An electrician's choice shear, the All-In-One Eshears are made of high carbon steel with molybdenum and Vanadium micro-serrated blades, which are vacuum hardened for everlasting durability. They are also outfitted with sporty ergonomic handles made of Nylon and 30% fiberglass for comfort and designed for ambidextrous use.

P/N 12-04996

VAMPLIER 6.25" KEVLAR CUTTING SHEARS



High quality scissors for cutting Kevlar thread. These scissors are specially designed for cutting Kevlar material; Kevlar thread in particular. One blade is micro-

serrated along the whole edge. The blades are made of high carbon alloy steel with Molybdenum and Vanadium edge 60~62, cutting edge hardness HV1200. The handles are especially designed for firm grip and to ease repetitive cutting action.....P/N 12-04994

VAMPLIER SUPER COMBO SCISSORS



A high quality multi-use 4-in 1 innovative scissors for industrial and home use. The cutting edges are sharp and micro-serrations provide a firm grip during cutting.

P/N 12-04995

VAMPLIER 8" KEVLAR CUTTING SHEARS



These shears are ideal to cut materials made from aramid and para-aramid Fibers such as Kevlar, Dyneema, Vectran, and Technora in rope, ribbon, tape or fabric form. Its blades are made of high carbon alloy steel from Japan and are infused with Molybdenum and Vanadium (HRC 60~62) through a proprietary process to achieve a level of hardness (HV1200) to cut strong materials.

P/N 12-04993

VAMPLIERS BRUTE 6.25™ SCREW EXTRACTION PLIERS



Vampliers World's Best Pliers VT-002-6 BRUTE-Screw Extraction Pliers for Stripped, Stuck, Security, Rusted, Specialty, Screws, Nuts, Bolts, Wire Cutter, Best Electricians, Aircraft, Maintenance Pliers, and Best Gift.....P/N 12-05484

TO

GRIP EDGE TOOLS

GRIP EDGE HAND DRIVE SOCKETS



GRIPEDGE R.P.T. (Rounding Prevention Technology) Hand Drive Sockets. Designed to replace standard tools, each socket's unique bi-directional design allows for loosening and tightening of both new and damaged fasteners. Thanks to our patented R.P.T. Technology, enjoy up to 50% more torque on new fasteners and up to 400% more torque on compromised ones.

HAND DRIVE SOCKETS - (HEX BIT SOCKETS)

Model	Description	Part No.	Price
HA20S	20-Piece 1/4" Drive Short SAE & Metric Hex Set	12-06601	.
GE8ASMHSRPT	8-Piece 1/4" Drive Short Metric Hex Set	12-06602	.
GE11ASSHSRPT	11-Piece 1/4" Drive Short SAE Hex Set	12-06603	.
HAM7LS	7-Piece 1/4" Drive Long Metric Hex Set	12-06604	.
HAS10LS	10-Piece 1/4" Drive Long SAE Hex Set	12-06605	.
HB16S	16-Piece 3/8" Drive Short Metric & SAE Hex Set	12-06606	.
GE7BSMHSRPT	7-Piece 3/8" Drive Short Metric Hex Set	12-06607	.
GE7BSHSRPT	7-Piece 3/8" Drive Short SAE Hex Set	12-06608	.
HBM6LS	6-Piece 3/8" Drive Long Metric Hex Set	12-06609	.
HBS6LS	6-Piece 3/8" Drive Long SAE Hex Set	12-06610	.
HCM8S	8-Piece 1/2" Drive Metric Hex Set	12-06611	.
HCS6S	6-Piece 1/2" Drive SAE Hex Set	12-06612	.
MH38S	38-Piece Master Hex Set	12-06643	.

HAND DRIVE SOCKETS - (STAR BIT SOCKETS)

Model	Description	Part No.	Price
GE9ASTSRPT	9-Piece Short 1/4" Drive RPT Star Set	12-06621	.
STA9LS	9-Piece Long 1/4" Drive RPT Star Set	12-06623	.
SCST10S	10-Piece Security Star RPT Set	12-06625	.
ES14S	14-Piece E-Star Socket Set	12-06627	.
STP13S	13-Piece RPT Star Plus Set	12-06628	.
ST14LS	14-Piece RPT Long Star Set	12-06624	.
GE14STSRPT	14-Piece RPT Short Star Set	12-06622	.
MST45S	45-Piece Master RPT Star Set	12-06644	.



GRIP EDGE MASTER RPT HEX & STAR DRIVER SET - 62-PC

Introducing the GRIPEDGE R.P.T. (Rounding Prevention Technology) 62-PC Master Hex & Star Driver Set. The MHST62S - 62-PC Master R.P.T. Hex & Star Driver Set is a cutting-edge toolset designed to replace standard hex tools with advanced Rounding Prevention Technology (RPT). This set includes Hex,

Star, Tamper Proof Star, and E-Star hex bit sockets, all engineered to prevent the rounding of hex fasteners and effectively remove even the most compromised fasteners. P/N 12-06645



GRIP EDGE 132-PC RPT MULTI-BIT DRIVER SET

• Patented and unique bi-directional design enables loosening & tightening of new and damaged fasteners • R.P.T. Technology is designed to prevent rounding of new and compromised fasteners • R.P.T.

Technology provides up to 50% more torque on NEW fasteners • R.P.T. Technology provides up to 400% more torque on damaged fasteners • Bits are precision machined from S2 steel for increased strength and durability • Bits have laser etched size markings for easy identification

P/N 12-06642

GRIP EDGE IMPACT DRIVE SOCKETS



Introducing the GRIPEDGE R.P.T. (Rounding Prevention Technology) Impact Drive Sets. Engineered to replace standard hex/star tools, this set features a patented bi-directional design that prevents rounding and delivers up to 50% more torque on new fasteners and up to 400% more on damaged ones. Each bit is crafted from Cr-Mo steel for enhanced strength and durability, with oversized, laser-etched markings for easy identification.

IMPACT DRIVE SOCKETS - (HEX IMPACT)

Model	Description	Part No.	Price
IHBM7S	7-Pc 3/8" Drive Short Metric Impact Hex Set	12-06613	.
IHBS7S	7-Pc 3/8" Drive Short SAE Impact Hex Set	12-06614	.
IHCM7S	7-Pc 1/2" Drive Short Metric Impact Hex Set	12-06616	.
IHCS6S	6-Pc 1/2" Drive Short SAE Impact Hex Set	12-06617	.
IHDM5S	5-Pc 3/4" Drive Metric Impact Hex Set	12-06619	.
IHDS5S	5-Pc 3/4" Drive SAE Impact Hex Set	12-06620	.
MIHB17S	17-Pc Master 3/8" Drive Impact Hex Set	12-06615	.
MIHC17S	17-Pc Master 1/2" Impact Hex Set	12-06618	.

IMPACT DRIVE SOCKETS - (STAR IMPACT)

Model	Description	Part No.	Price
IST10S	10 Piece RPT Drive Impact Star Set	12-06626	.



GRIP EDGE T-HANDLES

GRIPEDGE R.P.T. (Rounding Prevention Technology) T-Handles are designed to replace standard hex/star tools. R.P.T. prevents the rounding of good Hex fasteners whilst being able to remove extremely compromised Hex fasteners.

The unique, patented & Bi-directional geometry delivers up to 50% more prevention torque on good Hex/star fasteners vs standard Hex/star tools, whilst applying up to 400% more torque on damaged fasteners vs standard Hex/star tools. Each T-Handle is uniquely designed and over molded for additional comfort.

T-HANDLES - (HEX T-HANDLE)

Model	Description	Part No.	Price
PHM8S	8-Pc Metric Hex T-Handle Set	12-06647	.
PHS9S	9-Pc SAE Hex T-Handle Set	12-06648	.

T-HANDLES - (STAR T-HANDLE)

Model	Description	Part No.	Price
PST8S	8-Pc Star T-Handle Set	12-06646	.

GRIP EDGE EXTRACTOR SETS



RPT Socket Extractors - EASILY REMOVE Broken Studs, Bolts, Button Heads, & More. Revolutionary technology designed for removing even the most stubborn rounded nuts, bolts, and more. With straight-cut and bi-directional design, these extractors can be used on both left and right threads while providing the ability to work back and forth on stubborn fasteners when other extractors slip off.

EXTRACTORS - (SOCKET EXTRACTORS)

Model	Description	Part No.	Price
XAM9S	9-Pc 1/4" Drive Metric Socket Extractor Set	12-06630	.
XAS9S	9-Pc 1/4" Drive SAE Socket Extractor Set	12-06631	.
XAM9DS	9-Pc 1/4" Drive Metric Deep Socket Extractor Set	12-06632	.
XAS9DS	9-Pc 1/4" Drive SAE Deep Socket Extractor Set	12-06633	.
XBM10S	10-Pc 3/8" Drive Metric Socket Extractor Set	12-06634	.
XBS7S	7-Pc 3/8" Drive SAE Socket Extractor Set	12-06635	.
XBM10DS	10-Pc 3/8" Drive Metric Deep Socket Extractor Set	12-06636	.
XBS7DS	7-Pc 3/8" Drive SAE Deep Socket Extractor Set	12-06637	.
XCM7S	7-Pc 1/2" Drive Metric Socket Extractor Set	12-06638	.
XCS5S	5-Pc 1/2" Drive SAE Socket Extractor Set	12-06639	.
XCM7DS	7-Pc 1/2" Drive Metric Deep Socket Extractor Set	12-06640	.
XCS5DS	5-Pc 1/2" Drive SAE Deep Socket Extractor Set	12-06641	.

EXTRACTORS - (BROKEN BOLT EXTRACTORS)

Model	Description	Part No.	Price
BBX14S	14-Pc Broken Bolt Extractor Set	12-06629	.

GREX TOOLS - HARDWARE ORGANIZERS



GREX CROWN STAPLER

For projects requiring a slightly heavier thin-wire staple with a wider crown, the GREX fine wire stapler conveniently uses a crown staple with lengths ranging from 3/16" to 5/8". The 80AD and 71AD are built for speed of production, ergonomics and convenience: Patented trigger valve for fast-air-recycling

time, quick release magazine, compact with a slim profile, and a powerful lightweight industrial strength design.

22 Gauge GA 3/8 Crown Stapler.....P/N 12-06438
21 Gauge GA 1/2 Crown Stapler.....P/N 12-06439

GREX AIR 105° ANGLE RANDOM ORBITAL SANDER KIT



A new comprehensive kit that bundles this tool with all its compatible accessories plus an extensive range of premium abrasives - all packaged in a custom carrying case with foam inserts to securely protect and organize all its contents. This all-in-one kit gives you everything you need to quickly tackle all your projects.

The defining (and patented) feature of the AOS368 sander is its unique 105-degree angle which provides better ergonomics than traditional right-angle sanders. With its compact size, it was designed for detailed sanding, spot sanding, reaching in to corners and for getting into tight areas where larger sanders can't reach.

P/N 12-06426

GREX MICRO SPRAY GUN SET



These are the Tritium.TS and Tritium.TG at heart, and bundled with all the essential accessories to make it work and play like a mini spray gun. Along with the heavy duty, ready for anything case, the MF.TS and MF.TG are ready for almost anything you throw its way. These are feature packed airbrushes and you'll find the same reliable, high performance

quality you've come to expect from any Grex product.

TS5, Side Fed, .05MM Nozzle.....P/N 12-06409
TG5, Top Fed, .05MM Nozzle.....P/N 12-06407
TS7, Side Fed, .07MM Nozzle.....P/N 12-06410
TS7, Top Fed, 0.7MM Nozzle.....P/N 12-06408

GREX 2116AD - 22 GAUGE 3/16 INCH CROWN STAPLER



Dollhouses, miniature structures, replicas, architectural model building, upholstery and much more, the GREX 2116AD drives thin-wire 22-gauge 3/16" crown staples with lengths ranging from 3/16" to 5/8". The 2116AD finish stapler has a 3/16" crown, recommended for projects where nail heads are too small and might slip through the material.P/N 12-06437

GREX 21 GAUGE 1/2 STAPLER



For projects requiring a slightly heavier thin-wire staple with a wider crown, the GREX 80AD fine wire stapler conveniently uses a 21-gauge 1/2" crown staple with lengths ranging from 3/16" to 5/8". The 80AD is built for speed of production, ergonomics and convenience: Patented trigger valve for fast-air-recycling time, quick release magazine, compact with a slim profile, and a powerful

lightweight industrial strength design. For speedy continuous stapling, fast-air-recycling allows the 80AD to quickly maximize internal air pressure and maximize power after each shot for rapid shooting.

P/N 12-06439

GREX CROWN AUTO-FIRE STAPLER



GREX patent pending auto-fire speed dial allows the GREX 50AF, 71AF and 80AF fine wire stapler to shoot one staple or rapid-fire several staples per single trigger pull. Turning the auto-fire speed dial counter-clockwise (towards A - Automatic) increases shots per minute and turning the auto-fire speed dial clockwise (towards S - Single) reduces shots per minute.

20 GA 1/2 Gauge.....P/N 12-06440
22 GA 3/8 Gauge.....P/N 12-06441
21 GA 1/2 Gauge.....P/N 12-06442

VISIT OUR WEBSITE FOR A COMPLETE LINE OF GREX TOOLS

BOLTSTER FLEXIBLE BOLT AND FASTENER ORGANIZER



Introducing our new Boltster! "The Holster for your Bolts." Born out of necessity, the Boltster is a must have for mechanics, gearheads, woodworkers, body shops, aviation mechanics, marine mechanics, and anyone looking to streamline

their wrenching projects. The premise is simple. Our Boltster solves the problem of misplaced bolts and fasteners. This means no more cups of bolts or sandwich bags labeled with all your fasteners. No more guess work when reassembling a project. No more cardboard bolt diagrams. No more time wasted or anxiety from misplacing the fasteners you need!

Blue.....P/N 12-05554
Red.....P/N 12-06455
Green.....P/N 12-06456

BOLTSTER AIR FORCE ORGANIZER



The ultimate solution for fastener retention. Specifically designed for fasteners ranging from 4mm to 8mm (or 5/32" to 5/16" for standard measurements).

Made from durable silicone and weighing just under 2lbs, it features 80 evenly spaced holes, maximizing the distance between fastener heads for optimal organization. Ideal for airplane mechanics, marine mechanics, automotive technicians, and other professionals who handle smaller fasteners, the Boltster Air Force Organizer ensures efficiency and security in your work. This Red, White, and Blue themed organizer includes a locking clip, perfect for convenient storage. Plus, like all our products, it comes with a LIFETIME WARRANTY.....P/N 12-06439

BOLTSTER FLEXIBLE ORGANIZING TRAY




Introducing the third model in the Boltster line up, the Boltster Flexible Organizing Tray! The Boltster Tray is the next step of our product evolution. It is everything the Original Boltster provided and so much more. We have listened to your requests the past two years, and this is the result! The Boltster Tray is a must have

for automotive mechanics, body shops, aviation / marine technicians, woodshops, and anyone else looking to keep their projects organized.

Blue.....P/N 12-06457
Green.....P/N 12-06459
Red.....P/N 12-06458

BOLTSTER TOP BOX TOOL TRAY



Introducing the fourth and latest consumer model in the Boltster line up, the Boltster Top Box Tool Tray! Over the past few years, we have had an incredible amount of feedback requesting a larger product for the top of the tool box or rolling cart. This is the result!

The Top Box Tool Tray is a must have for automotive mechanics, body shops, aviation / marine technicians, woodshops, and anyone else looking to keep their projects organized.

Blue.....P/N 12-06460
Green.....P/N 12-06462
Red.....P/N 12-06461

BOLTSTER MODULAR SYSTEM



Have a bigger project? We have created a solution! This modular system will convert up to 4 flat Boltster Organizers into a larger working surface. This system is perfect for engine / transmission overhauls or any job that requires a significant amount of organization. These can be placed either on the front or back of your organizers depending on the look you are going for.

P/N 12-06463

BOLTSTER ORGANIZER PAINT PEN



This white paint pen was designed specifically for writing

on silicone and plastic surfaces. Stays when you want it, wipes off when you don't! This is hands down the best solution for drawing parts diagrams on your Boltster products. For convenience and storage, the slim body actually fits within the organizing pattern as well. Simply prime the pen, label your project, and remove when done. Rubbing alcohol is our favorite solvent for removal of the ink.P/N 12-06463

BOLTSTER TOP BOX TOOL TRAY



The Bitster 2.0 solves the problem of misplaced bits, screws, washers, fuses and other small fasteners. No more junky plastic bit organizers, no more cumbersome magnet trays, and most importantly, no more lost bits or screws on the job! The Bitster is constructed of a special, high strength silicone. Our proprietary blend is chemical resistant, heat resistant up to 500 degrees Fahrenheit, and incredibly resilient.

Blue.....P/N 12-06653
Green.....P/N 12-06655
Red.....P/N 12-06654

TO

COMPARTMENT BOXES – TOOLS

16 COMPARTMENT STORAGE BOX



Easy glide large and small racks are designed to accommodate large and small compartment boxes and create convenient, compact storage systems. Boxes can be removed and transported to the job site. Rugged plastic inserts and scoop bottoms fit neatly into steel outer shell boxes. Optional bases raise racks off the floor.

• Compartment: 16 • Weight: 8 lbs • Material: Prime cold rolled steel • Interlocking and Welded Construction • Colors: Durable gray powder coat finish • Depth: 12" • Height: 3" • Width: 18" P/N 12-02623

21 COMPARTMENT STORAGE BOX



Easy glide large and small racks are designed to accommodate large and small compartment boxes and create convenient, compact storage systems. Boxes can be removed and transported to the job site. Rugged plastic inserts and scoop bottoms fit neatly into steel outer shell boxes. Optional bases raise racks off the floor.

• Compartment: 21 • Weight: 8 lbs • Material: Prime cold rolled steel • Interlocking and Welded Construction • Colors: Durable gray powder coat finish • Depth: 12" • Height: 3" • Width: 18" P/N 12-02622

32 COMPARTMENT STORAGE BOX



Easy glide large and small racks are designed to accommodate large and small compartment boxes and create convenient, compact storage systems. Boxes can be removed and transported to the job site. Rugged plastic inserts and scoop bottoms fit neatly into steel outer shell boxes. Optional bases raise racks off the floor.

• Compartment: 32 • Weight: 8 lbs • Material: Prime cold rolled steel • Interlocking and Welded Construction • Colors: Durable gray powder coat finish • Depth: 12" • Height: 3" • Width: 18" P/N 12-02621

EZ GUIDE DRAWER RACKS



Easy glide large and small racks are designed to accommodate large and small compartment boxes and create convenient, compact storage systems. Boxes can be removed and transported to the job site. Rugged plastic inserts and scoop bottoms fit neatly into steel outer shell boxes. Optional bases raise racks off the floor.

• Weight: 20 lbs • Material: Prime cold rolled steel • Interlocking and Welded Construction • Colors: Durable gray powder coat finish • Depth: 15" • Height: 8-1/8" • Width: 20".....P/N 12-02624

EASY GLIDE RACK BASE



Rack base (20 5/8" W X 15 5/8" H X 12 5/8" D; weight 13 lbs.) is available for use with P/N# 12-02626.

• Weight: 13 lbs. • Material: Prime cold rolled steel • Colors: Durable gray powder coat finish • Depth: 12-1/8" • Height: 15-1/8" • Width: 20-3/8" P/N 12-02627

AEROSPACE VALVE CORE REMOVAL TOOL



Used for rapid and safe tire deflation, Tool threads on valve stem, Releases and traps the valve core within the tool but exhausts the air through ports, Prevents Injury to Technician and FOD (stops the valve core from becoming a missile!), and Air exhausts away from technician. Made In the USA **Small:** Examples of applicable aircraft: Boeing 757, 737 Classic/NG, 727, 717, MD88, Airbus A320 Series, Bombardier and Embraer Regional Jets, General Aviation piston and jet aircraft: Cessna piston, Beechcraft piston and turbine (Bonanza and King/Queen Air), Pilatus PC-12 etc. **Large:** Examples of applicable aircraft: Boeing 747, 767, 777, 787, DC10, MD11, Airbus A300, A330, and A380.

Small.....P/N 12-03428

Large.....P/N 12-04868

QUICK ANGLE - MEASURING ANGLES AND PITCHES



A multi-functional revolutionary new tool for measuring angles and pitches. It's rare to find one tool that will accomplish so much (miter cuts for one and duplications for another). Use this one-in-all tool to compliment and enhance your tool box.....P/N 12-02458

GRYPHON GRYPMAT PLUS NON-SLIP ANTI-STATIC TOOL MAT



The Grypmat is created by a U.S. Air Force veteran and is the inspired solution to problems he encountered as a mechanic working on the air crafts day after day. Revolutionize your workflow with the Grypmat! Working on cars, aircraft, motorcycles, boats, heavy machines, or doing projects around the house- a Grypmat is the DIY-er and mechanic's best friend and the perfect holiday gift idea. Get a GRYP today.

The Grypmat PLUS's bright color options help you stay organized and lets you easily see your tools, hammers, wrenches, sockets, drill bits, nuts, bolts, and whatever else you might be working with and provides a visual management system. With Grip ability, the GRYPMAT can grip to any surface up to a 70 degree angle, with NO MAGNETS! Make any space your workspace with a Grypmat- it goes where tool boxes can't and magnetic trays won't!

Heat and Chemical Resistant and Easy to Clean - A little bit of soap and water will make it new again. For tougher messes, you can even use brake cleaner. HEAT and CHEMICAL RESISTANT - The PLUS is heat resistant up to 350cXF, can stand up to chemicals like brake cleaner, gasoline, and engine oil. Plus it's anti-static.

Size	Orange	Price	Green	Price	Gray	Price
Small	12-06293	.	12-06298	.	12-06325	.
Medium	12-06294	.	12-06299	.	12-06317	.
Large	12-06295	.	12-06300	.	---	---
Duo	12-06296	.	12-06301	.	12-06321	.
Trio	12-06297	.	12-06302	.	---	---



SAFETY CABLE NOSE TOOLS

The unique tensioning/crimping Terminator Tool tensions the cable, crimps the ferrule on the cable, and cuts the cable flush with the ferrule. This tool utilizes the best principals of ergonomic design, user-friendly features, and improved operational durability. It is so user friendly that an entry level technician can learn the Safety Cable installation method in less than 30 minutes. The short length of this tool allows the user to get into

tight places where access is restricted. The ergonomic design comfortably fits the operator's hand. The robust construction and the precise dimensional quality of the tool provide the reliability and repeatability that you are looking for. The tool nose can be rotated 360° for the optimum position of each Safety Cable™ installation while allowing the tool to stay in a comfortable ergonomic position.

5 inch nose tool.....P/N 12-04570

7 inch nose tool.....P/N 12-04571


CLAMPTITE TOOLS



4-3/4 INCH STAINLESS STEEL / ALUMINUM TOOL EXTENDS TO 7"

With stainless steel components and an aluminum body, this tool was designed for the outdoors man, fisherman and farmer who would have it around a corrosive environment. The stainless steel components are stronger and you can just toss it in the tool box that is in the truck, boat or tractor. The tool is great for emergencies and tough wire jobs. This is the original marine grade tool.

4 3/4" Long - 7" Fully Extended.....P/N 12-02633



4-3/4 INCH PLATED STEEL / ALUMINUM TOOL EXTENDS TO 7"

Plated steel components with aluminum body. This tool was designed with the mechanic in mind who would have it around grease, oil and a controlled environment (non corrosive). Great for the CV boots, fuel line, thermostat housing, radiator hose and air hose type repairs.

4 3/4" Long - 7" Fully Extended.....P/N 12-02634



4-3/4 INCH STAINLESS STEEL TOOL WITH BRONZE NUT EXTENDS TO 7"

This tool is machined stainless steel with a one piece body and nose and bronze nut. The tool was designed with the detailed craftsman who need a long lasting tool able to hold up to extremely tough wire while clamping, binding and pulling the wire until the job is complete.

4 3/4" Long - 7" Fully Extended.....P/N 12-02632



TOGGLE CLAMPS

Easier to use than regular C-clamps. Quick-release style. Removable rubber pads on each screw.

Gap: 1" 1-1/2" Reach. P/N 12-02863

TOOLS

PRO CRIMPER III HAND CRIMPING TOOL



Ratchet tool for panel mount free hanging connectors, open barrel pins and sockets with dies 16-28 AWG. The PRO-CRIMPER III Hand Tool provides the versatility of general-purpose service of general-purpose service tools along with the reliability and ease of use of many premium-grade tools. To reduce handle force, the linkage was designed to match the forces required to crimp large insulated terminals. The result is dramatically less hand force than comparable tools. Model: #584951.

P/N 11-14450

KOUL SINGLES STAINLESS BRAIDED HOSE ASSEMBLY TOOLS

Since the invention of stainless braided hose, racers and mechanics have been fighting the problem of installing it into the socket part of the assembly. If your lucky and get a clean cut on the end of that hose, you might get it in. Most of the time a little fuzz appears on the hose end and the battle begins. It is not only time consuming, it can get bloody. This tool is the solution that makes the assembly a snap. Manufactured of a high tech composite, it is virtually indestructible. No need to worry about vise marks or wearing out. Just insert the socket into the tool, twist the hose in, and in less than 10 seconds you have it assembled. You can repeat this several times without recutting the hose end. The tool can pay for itself the first time you don't have to scrap some hose because it got too short trying to clean up the end. You'll be amazed at the amount of time you'll save.



SMALL KIT - The Small kit contains the capsules to install -4, -6, -8 hose into their respective sockets. To accommodate all the different manufacturer's fittings, spacers and sleeves are required to tighten up the some of the sockets within the capsule. For the tool to perform at its best, the socket

needs to be a snug fit in the funnel. The two spacers are used in some -6's and 8's. If the socket seems loose in the tool, use a spacer to tighten it up. In the small kit, only the Russell -4 needs a sleeve. Not for use with Teflon-style hoseP/N 12-01061



LARGE KIT - The Large kit contains the capsules to install -10, -12, -16 hose into their respective sockets. To accommodate all the different manufacturer's fittings, spacers and sleeves are required to tighten up some of the sockets within the capsule. For the tool to perform at its best, the socket needs to be a snug fit into the funnel. In the 1016 kit, all the -16's except Russell's require the sleeve and a rear spacer. See the instructions in the case for the proper spacer number. Most of the -10's and 12's* will use a spacer. Not for use with Teflon-style hose. * -12 is a stainless washer.

P/N 12-01062



HOT ROD KIT - The Hot Rod kit contains the capsules to install -6, -8, -10 hose into their respective sockets. To accommodate all the different manufacturer's fittings, spacers and sleeves are required to tighten up some of the sockets within the capsule. For the tool to perform at its best, the socket needs to be a snug fit into the funnel. Spacers are used in some -6's, -8's, and most -10's. If

the socket seems loose in the tool, use a spacer to tighten it up. See the instructions in the case for the proper spacer number. Not for use with Teflon-style hoseP/N 12-01898



THE PRO COMBO - The Pro Combo is a special offer of BOTH the #468 and #1016 kits listed above. Pros need both kits to handle all the hose sizes in a race car. Ordering this combination will save \$15.00. Not for use with Teflon-style hose.

P/N 12-01897

AMP PRO CRIMPER II HAND TOOL



The PRO-CRIMPER II Hand Tool provides the versatility of general-purpose service of general-purpose service tools along with the reliability and ease of use of many premium-grade tools. For versatility, 75 die sets (available separately) are interchangeable, including those for open-barrel contacts and terminals. Additionally, many of these die sets have multiple cavities for crimping a variety of contact or terminal sizes. For reliability, the tool is constructed of durable high carbon steel with extra-strength pivot pins. And, for user convenience, the PRO-CRIMPER II Hand Tool particularly excels. Ratchet control is provided for complete crimp cycling; this helps eliminate partial crimps. Also, an emergency ratchet release allows the user to open the tool jaws at any time during the crimp cycle. To reduce handle force, the linkage was designed to match the forces required to crimp our largest insulated terminal. The result is dramatically less hand force than comparable tools. Also, the angled had and specially designed handles provided comfortable operation. Locator are mounted on pin-and-socket style tools. They help properly locate the contact in the die set, provide a wire stop, and help minimize contact rotation and bending during crimping.

PROCRIMPER II 58433-3P/N 12-01379
O-CRIMP DIE 58435-1P/N 12-01380
HEX CRIMP DIE 58436-1P/N 12-01381
PIN & SOCKET 58495-2P/N 12-01382

XCELITE ROUND BLADE SLOT SCREWDRIVER



- Xcelite 1/8 inch x 10 inch length, Regular Round Blade Screwdriver, Amber Handle
- 1/8" x 10" Regular Round Blade Screwdriver, Amber Handle

Features: • Regular round blade screwdriver • Blades made of AISI 6150 chrome vanadium steel, plated for protection • Handle color: AmberP/N 12-04776



AIRLOC CROSSPIN INSTALLATION TOOL

This tool accommodates the two series (diameters) of Airloc (A-Spec) studs commonly found in Beechcraft and Raytheon aircraft: #2 and #5. It has a seat for each series so the cross pin can be installed and centered and operates by placing the pin into the appropriate hole where it should remain seated. Then compress the pliers to force the cross pin into the stud. Once completely clamped, the pin will be perfectly centered in the stud. Comes with complete instructions.

P/N 12-04808

BETA RING PULLER WITH SWIVEL HEAD



Aviation Beta Ring Puller with Swivel Head (Designed for a 3, 4, and 5 Blade Prop): 7" diameter body, drilled for a 3, 4, and 5 blade attachment pattern on 2 individual bolt circles for motor size flexibility.

The main shaft has 5" of travel and is driven by a 6" removable handle. The pushing cap has a non-removable, free-spinning swivel head with a large inside diameter cup. Included are 5 long threaded rods with mounting couplers, 5 short threaded rods with custom machined forks, and all associated wingnuts and washers.

For A 3 and 4 Blade Prop

P/N 12-06284

For A 3,4, and 5 Blade Prop

P/N 12-06283

UNIVERSAL BETA RING PULLER WITH SWIVEL HEAD FOR TURBINE PROPS



Universally designed to fit Pilatus, King Air, and other turbine aircraft!

Aviation Beta Ring Puller with Swivel Head (Designed for a 3, 4, and 5 Blade Prop):

Large 8" diameter body drilled for a 3, 4, and 5 blade attachment pattern on 3 individual bolt circles for motor size flexibility. The main shaft has 5" of travel and is driven by a 6" removable handle. The pushing cap has a non-removable, free-spinning swivel head with a large inside diameter cup. Included are 5 long threaded rods with modified mounting couplers, 5 short threaded rods with custom machined forks, and all associated wingnuts and washers....P/N 12-06282

TO

ASTRO TOOLS



ASTRO TOOL CRIMP TOOL (M22520/23-01)

AMT23B, mil spec M22520/23-01, is a heavy duty pneumatic crimp tool designed to crimp machined pin and socket contacts and insulated and non-insulated terminals size 8-4/0. Requires a die assembly and locator determined by the application.

P/N 11-20373



ASTRO TOOL CRIMP TOOL TURRET HEAD DMC TH1A (M22520/1-02)

615709, mil spec M22520/1-02, is a turret head used with the 615708, mil spec M22520/1-01, crimp tool frame on size 20-12 pin and socket contacts installed in MIL-C-5015, MIL-C-26482, MIL-C-26500, and MIL-

C-83723 circular connectors.P/N 11-20352



ASTRO TOOL CRIMP TOOL TURRET HEAD DMC TH4 (M22520/1-03)

The 615710, mil spec M22520/1-03, is a turret head used with the 615708, mil spec M22520/1-01, crimp tool frame on size 20-16 pin and socket contacts installed in MIL-C-28748 connectors.

P/N 11-20353



ASTRO TOOL CRIMP TOOL TURRET HEAD DMC TH163 (M22520/1-04)

Used to locate crimps on size 20-12 pin and socket contacts installed in MIL-C-38999 connectors and suggested selector depth settings for the wire size being used.

P/N 11-20354

ASTRO TOOL - CRIMPING TOOL DMC AF8 (M22520/1-01)



615708, mil spec M22520/1-01, is a crimp tool designed for machined pin and socket contacts with wire barrel sizes 20-12. Dial Selectable, 8 indent crimp, controlled cycle ratchet – requires a turret head or positioner

determined by the contact part number. Direct equivalent to Daniels Manufacturing (DMC) AF8.P/N 11-20351



ASTRO TOOL CRIMPING TOOL (M22520/2-01)

The 615717, mil spec M22520/2-01, is a crimp tool designed for machined pin and socket contacts with wire barrel sizes 20-28. Dial selectable, 8 indent crimp, controlled cycle ratchet – requires appropriate bayonet positioner determined by the contact part number.

P/N 11-20357



ASTRO TOOL CRIMP TOOL DMC HX4 (M22520/5-01)

620175, mil spec M22520/5-01, is a standard C-frame crimp tool which accepts interchangeable die sets (M22520/5-xx) to crimp a wide range of military and proprietary coaxial and triaxial connectors and contacts. Numerous die sets available.

P/N 11-20367

ASTRO TOOL LARGE MICROCRIMP CRIMP TOOL (HARTING 09 99 000 0001)



621205 is a controlled cycle crimp tool designed for machined pin and socket contacts installed in Harting Rectangular Power Connector HAN D & HAN E series connectors, 16A and 10A. The 621205 requires a locator determined

by the contact part number. Equivalent to Harting 09990000001. Also see 621205L for tool/locator combination...P/N 11-20370



ASTRO TOOL CRIMP DIE SET DMC Y501 (M22520/5-100)

620617, mil spec M22520/5-100, is a crimp die set used with 620175, mil spec M22520/5-01, crimp tool frame to crimp size 22 thru 10 insulated terminals and splices conforming to MS17143, MS25036, MIL-T-7928, MS25274, and MS27429. The 630045 die set is an

improved version (not mil-spec) which provides a tighter crimp on smaller wires.

P/N 11-20369



ASTRO TOOL CRIMP DIE SET DMC Y143 (M22520/5-45)

620310, mil spec M22520/5-45, is a crimp die set with 2 cavities used with 620175, mil spec M22520/5-01, crimp tool frame which produces .231 and .218 hex crimps.

P/N 11-20368



ASTRO TOOL REMOVAL TWEEZER DMC DRK95-22M (MS27495R22M)

The ATBX2046, mil spec MS27495R22D/M, is a removal tweezer designed for size 22D & 22M pin and socket contacts installed in MIL-C-38999 Series I, II & III rear release circular connectors

P/N 11-20375



ASTRO TOOL REMOVAL TWEEZER DMC DRK145

The ATC2076 is a removal tweezer designed for size 20 contacts installed in ITT-Cannon D*C and D*U Series, rear release D-subminiature connectors. Contact numbers: 030-1952-000, 030-1953-000, 030-1954-000, 030-1955-000. Longer tip version of ATC2071.P/N 11-20378

ASTRO TOOL REMOVER TWEEZER DMC DRK95-22B (M81969/8-04)



The ATML 0804B, mil spec M81969/8-04, is a removal tweezer designed for size 22 pin and socket contacts installed in MIL-C-38999 rear release circular connectors.P/N 11-20383

ASTRO TOOL INSERTION TWEEZER DMC DAK95-20B (M81969/8-05)



The ATML 0805B, mil spec M81969/8-05, is an insertion tweezer designed for size 20 pin and socket contacts installed in MIL-C-38999 Series I & II rear release circular connectors.

P/N 11-20383

ASTRO TOOL REMOVAL TWEEZER DMC DRK95-20B (M81969/8-06)



The ATML 0806B, mil spec M81969/8-06, is a removal tweezer designed for size 20 pin and socket contacts installed in MIL-C-38999 rear release circular connectors.P/N 11-20417

ASTRO TOOL REMOVAL TOOL DMC DRK20B (M81969/19-06)

The ATML1906B, mil spec M81969/19-06, is a removal tool designed for size 20 pin and socket contacts installed in MIL-C-5015, MIL-C-26482, MIL-C-26500, and MIL-C-83723 front release circular connectors.P/N 11-20422

ASTRO TOOLS



ASTRO TOOL REMOVAL TOOL DMC DRK16B (M81969/19-01) - The ATML1901B, mil spec M81969/19-01, is a removal tool designed for size 16 pin and socket contacts installed in MIL-C-5015, MIL-C-26482, MIL-C-26500, and MIL-C-83723 front release circular connectors. P/N 11-20389



ASTRO TOOL INSERTION PLIER DMC DAK283 (11-6781) - ATBX1-6781 is an insertion plier designed for size 16 pin (10-189004-16F) and socket (10-189006-16F) contacts installed in Amphenol (Bendix) PT-CE Series miniature circular connectors. Equivalent to Amphenol (Bendix) 11-6781.. P/N 11-20410



ASTRO TOOL INSERTION TOOL DMC DAK16B (M81969/17-04) - The ATML1704B, mil spec M81969/17-04, is an insertion tool designed for size 16 pin and socket contacts installed in MIL-C-5015, MIL-C-26482, MIL-C-26500 and MIL-C-83723 front release circular connectors. P/N 11-20418



ASTRO TOOL INSERTION TOOL 3301 DAK55-22SA (M81969/33-01) - The ATML3301, mil spec M81969/33-01, is an insertion tool designed for size 20 pin and socket contacts installed in MIL-C-28840 connectors. The same tool, with an angled tip is also available as part number ATML3302. P/N 11-20415



ASTRO TOOL INSERTION TOOL DMC DAK12B (M81969/17-05) - The ATML1705B, mil spec M81969/17-05, is an insertion tool designed for size 12 pin and socket contacts installed in MIL-C-5015, MIL-C-26482, MIL-C-26500 and MIL-C-83723 front release circular connectors. P/N 11-20388



ASTRO TOOL CALIBRATION GAGE DMC G125 (M22520/3-1) - The 615716, mil spec M22520/3-1, is a calibration gage (Go, No-Go) used on 615708, mil spec M22520/1-01, and 615717, mil spec M22520/2-01, crimp tools. P/N 11-20356



ASTRO TOOL LOCATOR DMC WA23-9 (M22520/23-09) - AMT23009L, mil spec M22520/23-09, is a locator used with AMT23B, mil spec M22520/23-01, for size 8 machined pin and socket contacts installed in MIL-C-5015 front and rear release connectors. P/N 11-20372



ASTRO TOOL POSITIONER DMC K267-1 (M22520/2-23) - Used to locate crimps on size 22 pin and socket contacts installed in MIL-C-81659, MIL-C-83733, ARINC 404, and ARINC 600 rectangular connectors. P/N 11-20409



ASTRO TOOL POSITIONER DMC K43 (M22520/2-10) - The 615726, mil spec M22520/2-10, is a bayonet positioner used with the 615717, mil spec M22520/2-01, crimp tool frame on size 20 pin and socket contacts installed in MIL-C-38999 circular connectors. P/N 11-20363



ASTRO TOOL POSITIONER DMC K42 (M22520/2-09) - 615725, mil spec M22520/2-09, is a bayonet positioner used with the 615717, mil spec M22520/2-01, crimp tool frame on size 22 pin (male) contacts installed in MIL-C-24308 subminiature rectangular and MIL-C-38999 circular connectors. P/N 11-20362



ASTRO TOOL POSITIONER DMC K13-1 (M22520/2-08) - 615724, mil spec M22520/2-08, is a bayonet positioner used with the 615717, mil spec M22520/2-01, crimp tool frame on size 20 pin and socket contacts installed in MIL-C-24308, MIL-C-81659, MIL-STD-1549, ARINC 404, and ARINC 600 rectangular connectors. P/N 11-20361



ASTRO TOOL POSITIONER DMC K40 (M22520/2-07) - 615723, mil spec M22520/2-07, is a bayonet positioner used with the 615717, mil spec M22520/2-01, crimp tool frame on size 22 socket (female) contacts installed in MIL-C-38999 circular connectors. P/N 11-20360



ASTRO TOOL POSITIONER DMC K41 (M22520/2-06) - Used to locate crimps on size 22 socket (female) contacts installed in MIL-C-24308 subminiature rectangular and MIL-C-38999 circular connectors. P/N 11-20359



ASTRO TOOL POSITIONER K1S DMC (M22520/2-02) - Used to locate crimps on size 20 pin and socket contacts installed in MIL-C-5015, MIL-C-26482, MIL-C-26500, and MIL-C-83723 circular connectors. P/N 11-20358



ASTRO TOOL DIE ASSEMBLY DMC WA23-2 (M22520/23-02) - AMT23002DA, mil spec M22520/23-02, is a die assembly used with AMT23B, mil spec M22520/23-01, to crimp size 8 machined pin and socket contacts installed in MIL-C-5015 front and rear release connectors. P/N 11-20371



ASTRO TOOL ADJUSTABLE POSITIONER DMC UH2-5 (M22520/1-05) - The 615712, mil spec M22520/1-05, is an adjustable positioner used with the 615708, mil spec M22520/1-01, crimp tool frame for size pin/socket contacts or similar applications up to .067" dia. P/N 11-20355

ASTRO TOOL POSITIONER DMC 86-21 (M22520/7-13) - 620085, mil spec M22520/7-13, is a bayonet positioner used with 616336, mil spec M22520/7-01, crimp tool frame on size 16 socket (M39029/22-193, M39029/101-554) contacts installed in MIL-C-81511 Series 3 & 4 rear release circular connectors and MIL-STD-1549 terminal junction modules. P/N 11-20366

ASTRO TOOL POSITIONER DMC 86-20 (M22520/7-12) - 620084, mil spec M22520/7-12, is a bayonet positioner used with 616336, mil spec M22520/7-01, crimp tool frame on size 20 socket (M39029/22-192, M39029/101-553) contacts installed in MIL-C-81511 Series 3 & 4 rear release circular connectors and MIL-STD-1549 terminal junction modules. P/N 11-20365

ASTRO TOOL POSITIONER DMC 86-19 (M22520/7-11) - 620083, mil spec M22520/7-11, is a bayonet positioner used with 616336, mil spec M22520/7-01, crimp tool frame on size 22 socket (M39029/22-190, M39029/22-191, M39029/101-551, M39029/101-552) contacts installed in MIL-C-81511 Series 3 & 4 rear release circular connectors and MIL-STD-1549 terminal junction modules. P/N 11-20364

TO

TORQUE WRENCHES

DIAL TYPE TORQUE WRENCH



Dial Type Wrenches provide unmatched reliability, accuracy and durability for applications where torque measurement is extremely critical. Models feature a memory pointer that indicates the highest torque achieved during application of torque. 2% accuracy clockwise and counterclockwise. All wrenches are made in the USA of all steel construction for the highest quality. Both models come with a plastic storage box and a calibration compliance certificate.

3/8" sq.dr. / 300 lb.inP/N 12-00531
3/8" sq.dr. / 600 lb.in.-50 lb. ftP/N 12-00532

INDUSTRIAL DIAL (TORQUE) WRENCH



High-precision assembly operations, fastener testing (in-process/final/receiving) operations where prevailing-torque nuts are used, and auditing of fastener or assembly torque are all places where the new IDW Series will make a difference.

P/N 12-05586

QUICK-GRAB RATCHET-ACTION WRENCHES



You'll have the advantages of an open-end wrench, plus the convenience of ratchet action. The jaws snap open to slip onto fittings and fasteners; then, they close tightly for ratcheting. Wrenches require a 30 degree handle swing to turn a fastener. All are made of hardened steel with a black finish.

Size	Part No.	Price
5/8 Inch	12-00913	.
1/2 Inch	12-03239	.
9/16 Inch	12-03240	.

DIGITAL FORCE GAUGE

Digital Force Gauge RS232 USB AA Battery Powered 215 x 90 x 45mm 20kg

Features:

- Data record mode: Normal model or Peak hold mode.
- Normal record mode: Set sampling time from 1 second to 8 hours.
- Peak hold record mode: Set sampling time from 10 ms to 500 ms.
- Memory capacity of normal record mode: 1 GB to 16 GB.
- Memory capacity of peak hold record mode: 1000 data no. (max.)

- Under Peak hold record mode, if execute the "Data record" function, the memory circuit will store 1000 data no. (max.) measuring data into the SD card per fast speed sampling time (10ms to 500 ms).
- Under Normal record mode, if execute the "Data record" function, will save the measuring data along the real time value (Year/Month/ Date/ Hour/Minute/Second) into the SD card per normal sampling time (1 second to 8 hours).
- After save the data into the SD memory card, it can be down load the data to the Excel directly, extra software is no need. User can make the further data analysis (graphic analysis) by themselves.
- Large LCD display with back light.P/N 10-07523



ADJUSTABLE TORQUE SCREWDRIVER



Bi-directional Accuracy of +/- 6% Indicated Value from 20% to 100% of capacity meets or exceeds ASME B107.300-2010 and ISO 6789. Incredibly durable; many owners have experienced a service life of 10+ years! Operator cannot overtorque. Clutch releases automatically when desired torque has been achieved. Scale on shaft is marked in dual incrementation (in. lbs. and NM) on Cal 36/4, kgf-cm on CAL 40. Magnifying lens improves view of clearly engraved scale. To operate, simply dial torque setting and insert bit. Uses standard bits, adapters and sockets. Anti-backlash design enhances repeatability. Comes with FREE certificate of calibration from our ISO/IEC 17025 Accredited Calibration Laboratory. CAL 36/4 can be ordered with certification for English or SI units of measure ..P/N 12-03398

MICROMETER TYPE TORQUE WRENCH



The wrench is equipped with a reversible ratchet head or plain (non-ratcheting) head may be used in both right or left hand directions. The drive head accommodates sockets, extensions, crowfoot adapters, and other attachments to fit a multitude of fasteners both in English and Metric.....P/N 15-05531

MICROMETER ADJUSTABLE TORQUE WRENCHES



Micrometer Adjustable Ratcheting Square Drive torque wrenches are ideal for any application where: • The fastener or fitting to be tightened can be engaged with a socket. • The user changes from one torque to another often. • A high amount of rotation or limited access requires ratcheting to achieve the desired torque. • The ability to select the torque and lock it in rapidly is needed. • Simplicity of operation is needed. • Very high durability is needed. These needs are common in small quantity assembly operations and many maintenance functions; the SDR-Series tools are superb for these types of applications. • Range: 40-200 in.lbs. • Graduation: 2 in. lbs • Sq. Dr.: 3/8" Range: 40-200 in.lbs. • Graduation: 2 in. lbs • Sq. Dr.: 3/8" P/N 12-03403



MICROMETER ADJUSTABLE INTERCHANGEABLE TORQUE WRENCHES

Note: Must be used with part numbers 12-03406 and 12-03407. See Accessories. The S/R line of Micrometer Adjustable Interchangeable Head Torque Wrenches are an excellent solution when: • The ability to change torque quickly is needed • The ability to engage fasteners with different types of heads is needed • A socket cannot be used on some of the fasteners to be tightened • It is desirable to minimize the number of torque wrenches in the location • These conditions are frequently found in maintenance applications of varying types, and in some assembly operations. When they are encountered, the CCM-Series tools are often an excellent choice. • Range: 30-150 in. lbs. • Graduation: 2 in. lbs.....P/N 12-03404



3/8 INCH SQUARE DRIVE RATCHET INTERCHANGEABLE HEAD

Note: Must be used with part numbers 12-03404 or 12-03405 and 12-03407. See Accessories. This series is designated "SDRT". Ideal for use when a socket is to be used and there is significant rotation of the fastener required to complete the tightening: A socket can be used to engage the fastener. A higher amount of rotation will be needed to attain the desired torque.

P/N 12-03406



3/8 INCH SQUARE DRIVE INTERCHANGEABLE HEAD

Note: Must be used with part numbers 12-03404 or 12-03405 and 12-03406. See Accessories. This series is designated "SD". Ideal for use when a socket is to be used and there is significant rotation of the fastener required to complete the tightening: Calibrating the wrench on a torque tester, A socket can be used to engage the fastener, A small amount of rotation will be needed to attain the desired torque.

P/N 12-03407

WRENCHES - PLIERS - FEIN MULTIMASTER

REVERSIBLE RATCHETING TAP WRENCH



No. 0 to 1/4" Reversible Tap Wrench - General's Reversible Tap Wrenches feature a fine-tooth ratcheting mechanism which adjusts on the fly for right - and left-hand use. In addition, the ratchet can be locked to transform the tool into a standard tap wrench. The self-centering, hardened-steel jaws assure the formation of straight threads in your work piece. Although designed mainly for holding taps, the Reversible Tap Wrench also works great with reamers, drill bits, screw extractors and other hand-turned tools.

P/N 12-03352

60 PIECE DRILL BIT SET



60 pc. Bright - Jobber Length - 118° Point - Wire Sizes - 95090850. Excellent general purpose drill bit. Precision CNC machined for faster, more efficient chip removal. Industrial-Grade NAS High Speed Steel (HSS). Heavy duty metal storage case. Numbered metal tip-out indexes keep bits organized. Made in the USA. Material applications: aluminum, copper, wood, plastic Size range: Wire #1-#60P/N 12-04760

AIR CHISEL TOOLS



Aircraft structures are sensitive to tool damage during manufacture, servicing and repair but the numerous plastic and composite materials available in our products are able to deliver the levels of strength and durability required of tools systems whilst

conforming to aircraft manufacturer specifications.

Strong ribbed backing air chisels that are easily reshaped. Designed to fit standard air chisel tools with a 0.401" diameter shank, this scraper system maintains the damage reduction and non-marring properties of our hand tools but is suited to heavy-duty and higher volume material removal while reducing operator fatigue.

GENERAL SCRAPER CHISEL TOOLS

Standard width air chisel scraper.

General Scraper Chisel Tool - Soft

P/N 12-02282

FLAT SCRAPER CHISEL TOOLS

Steep angle for air chisel scraping delicate, narrow jobs that require less of a wedging angle.

Flat Scraper Chisel Tool - Soft

P/N 12-02284

BOX CORNER SCRAPER CHISEL TOOLS

Ideal shape for air chisel scraping tight into corners, removing material on both sides surface at once.

Box Corner Scraper Chisel Tool - Soft

P/N 12-02286

LARGE HEAVY DUTY FLAT AIR CHISEL TOOL

Wide air chisel scraper for larger areas of removal.

Large Heavy Duty Flat Air Chisel Tool- Hard

P/N 12-02288

NARROW HEAVY DUTY FLAT AIR CHISEL TOOLS

Narrow air chisel scraper for tight, confined areas of removal.

Narrow Heavy Duty Flat Air Chisel Tool- Hard

P/N 12-02289

AEROWING RAPID DESEALING SYSTEM



Pneumatic aircraft sealant scraper removal hand tool. Now smaller, lighter, less vibration!

Use for decal or floor panel removal too.

The Aerowing Rapid Desealing System (RDS) is a pneumatic hand tool which significantly improves the efficiency and strain associated with removing aircraft sealants and other adhesives. The RDS may be safely used to remove aircraft sealant from inside of fuel tanks, as well as

exterior structure of aircraft, composites, windows, etc.

The pneumatic Rapid Desealing System quickly de-bonds sealant 40 times faster than traditional methods.....P/N 09-06183

FEIN MULTIMASTER TOOL SET



The FEIN MultiMaster FMM 350QSL Top Kit uses the new, tool-free, snap-in Starlock mounting system for easier, safer blade and accessory changes. This comprehensive kit includes the Multimaster 350QSL and accessories for sawing, scraping, grinding, sanding and dust extraction. The Starlock mounting system increases torque transfer and power efficiency, which reduces wear and tear on the tool and extends its service life. The ergonomic handle design, minimal vibration and reduced noise make using the tool more comfortable for you. Fits all Starlock and Starlock Plus blades and accessories.

In the box: • 1 FEIN MultiMaster FMM 350 QSL • 1 backing pad • 3 of each sanding sheet (grits 60, 80, 120, 180) • 1 perforated backing pad • 3 of each sanding sheet (grits 60, 80, 120, 180), perforated • 6 sanding sheets 4-1/2 in perforated (2 each of grits 60, 80, 180) • 1 dust extraction assembly • 1 rigid scraper blade 1 E-Cut Long-Life saw blade 1-3/8 in (35 mm) (type 160) • 1 Universal E-Cut saw blade 1-3/4 in (44 mm) (type 152) • 1 E-Cut Long-Life saw blade 2-9/16 in (65 mm) (type 161) • 1 HSS segment saw blade • 1 carbide segment saw blade • 1 carbide rasp (triangular) • 1 tool case.....P/N 12-00834

HOSE PINCH-OFF PLIERS



Great for radiator and heater hose, vacuum and fuel lines. Tested to 50,000 cycles without failure for reliable performance. Patented clamping mechanism - No adjustment needed -- Simply squeeze to lock Cushion handgrips for comfort and control. Available in three sizes. Made in U.S.A.

Hose Pinch-off Pliers 1-1/4" OD Cap.P/N 12-00524

Hose Pinch-off Pliers 2-1/2" OD Cap.P/N 12-00525

Hose Pinch-off Pliers 3/4" OD Cap.P/N 12-00526

HOSE CLAMP PLIERS



Specially designed for applying and removing spring hose clamps. The recesses in the jaws grip the ends of the spring so it cannot slip or twist. Grips with either end or side of jaws for reaching into tight places.

P/N 12-01154

TO

SAFETY WIRE TWISTERS - SAF-T-BLOKS

STAHLWILLE WIRE TWISTING PLIERS



Wire twisting pliers L.230mm or L.280mm Header burnished, polished
Handles burnished.

Features:

- For twisting wires up to Ø 1.6 mm (0.06")
- With cutters
- Secure grip thanks to special serration design
- Cutting jaws bevelled by 40°
- For both clockwise and counter-clockwise rotation
- With automatic return
- Chrome Alloy Steel, head and handles burnished

Description	Part No.	Price
230 mm - Right Twisting With Automatic Return	12-06944	.
230 mm - Left Twisting With Automatic Return	12-06945	.
230 mm - Right Or Left With Automatic Return	12-06943	.
220 mm - Right Or Left With Automatic Return & Lead Catcher	12-06948	.
230 mm - Right Twisting With Manual Return	12-06946	.
230 mm - Left Twisting With Manual Return	12-06947	.
280 mm - Left Twisting With Automatic Return	12-06951	.
280 mm - Right Twisting With Automatic Return	12-06950	.
280 mm - Right Or Left With Automatic Return	12-06949	.
280 mm - Right Or Left With Automatic Return & Lead Catcher	12-06952	.

SAFETY WIRE TWISTERS



These top quality twisting lock pliers with automatic return are reversible, economically priced, and extremely durable. Features a sharp cutting edge and will twist up to .060" dia. safety wire.

6-INCH.....P/N 12-02828
9-INCH.....P/N 12-02829



SAFETY WIRE TWISTER KIT

- 04-134SR - Safety Wire Twister
- 04-134SR6 - Safety Wire Twister - Mini
- 43-025 - Stainless Steel Aircraft Safety Wire
- 43-032 - Stainless Steel Aircraft Safety Wire
- 43-041 - Stainless Steel Aircraft Safety Wire
- Kit Box 13".....P/N 12-02350

ECONOMY SAFETY WIRE TWISTERS



These top quality twisting lock pliers with automatic return are economically priced and extremely durable. Features a sharp cutting edge and will twist up to .060" dia. safety wire. Length 6" & 9". Foreign made.

6".....P/N 12-01472
9".....P/N 12-01473

SAFETY WIRE INSTALLATION PLIERS - 8 INCH



American Aviator Tools set out to develop safety wire pliers that rival top professional units but priced for a much broader audience. The SWP8-REV features a precision diagonal nose jaw and heat treated cutting blades, using pro-spec chrome vanadium material. The locking mechanism operates with ease, as does the spring return lever. Finally, the SWP8-REV can produce right-hand twists (clockwise action) or left hand twists. Fit and finish is professional quality. The WSP8-REV measures 9" tip-to-tip.....P/N 12-06453



AERO SAF-T-BLOKS

Since the introduction of Saf-T-Bloks in 1981, they've helped thousands of mechanics by taking the headaches and hassle out of drilling safety wire holes in bolts and nuts. This easy to use Saf-T-Blok holds the bolt steady after you thread it in to the required depth. You then drill the hole through the center with no risk of misalignment. Saf-T-Blok is available in 4 sizes:

Description	Part No.	Price
Metric: (5 Thread Size) 6x1, 8x10, 8x1.25, 10x1.25, 10x1.5	12-15346	.
Aero: (5 Thread Size) 8-32, 10-32, .25x20, .25x28, 5/16 x 24	12-15347	.



NUT SAF-T-BLOK

Designed to enable safety wire holes to be drilled through the head of bolts or through nuts, across the diagonal. Designed to accept up to 3/4 inch diameter nut. Easy to use. Nut Saf-T-Blok requires that the nut or bolt be placed into the "V" groove, tighten down the holding screw, drill and deburr.P/N 12-15349



ALLEN II SAF-T-BLOK STANDARD

From MTE industries the Allen Saf-T-Blok2. Design for all socket head cap screws Metric and SAE. With an added plus can be used as a tubing drill guide. As with all the Saf-T-bloks, this takes the headache and hassle out of drilling safety wire holes.....P/N 12-02407

SWP8 SAFETY WIRE INSTALLATION PLIERS



The SWP8 features a diagonal nose jaw and heat-treated cutting blades, using pro-spec chrome vanadium material. The locking mechanism operates with ease, as does the self-retracting twist lever, according to company officials.....P/N 12-05033

SAFETY WIRE KITS



These kits include professional safety wiring kit for all applications. Contains 9" automatic standard twister, 6" safety wire twister, made of hardened alloy steel-black oxide finish plus (3) 1/4 lb. spools of annealed stainless steel safety wire. (Sizes: 020, 032, 041). Model 100 also includes 19" chrome adjustable safety wire twister (for cavity and deep access applications). Model 200P/N 12-16650

SAFETY WIRE DRILLING JIG



This tool provides a fast, simple way to drill bolt heads with virtually no broken drill bits. The tool is made of 6061T6 hard anodized aluminum for durability. Fits 3/16" to 5/8" dia. bolts and works on hex head bolts, header bolts, 12 point countersink and Allen head cap screws. Includes drill bushings and two cobalt drills. Made in U.S.A.....P/N 12-16600

SAFETY WIRE TOOL



Easy one-hand operation. Reaches into tight places, makes a fast, neat twist. Shatterproof plastic handleP/N 12-01072

STRIPMASTER LITE WIRE STRIPPERS



Professional-grade Stripmaster Lite Wire Strippers that feature knife-type blades for precise and clean wire stripping. These tools are designed for easy and efficient wire stripping, making them ideal for electricians, technicians, and DIY enthusiasts. The Stripmaster Lite Wire Strippers are durable, reliable, and easy to use, offering superior performance for various wire-stripping applications.

P/N 12-03714

KLEIN TOOLS

STRIPPER/CUTTERS

Klein wire strippers and cutters cut, strip, gauge and loop a wide range of wire types and sizes. Made of strong, hardened steel with comfortable handles, these tools are durable and long lasting.



11055 KLEIN-KURVE™ WIRE STRIPPER/CUTTER

Solid and Stranded. Double-dipped comfort grips with curved handles, cuts, strips, loops and gauges 10-18 AWG solid wire and 12-20 AWG stranded wire, cleanly shears 6-32 & 8-32 screws, coil spring provides fast, self-opening actionP/N 12-00235



11057 KLEIN-KURVE™ WIRE STRIPPER/CUTTER

Solid and Stranded. Double-dipped comfort grips with curved handles, cuts, strips, loops and gauges 20-30 AWG solid wire and 22-32 AWG stranded wire, cleanly shears 6-32 & 8-32 screws, coil spring provides fast, self-opening actionP/N 12-00236



11045 KLEIN 10-18 WIRE STRIPPER/CUTTER

Strips 10 to 18 AWG solid wire, easy-to-read wire gauge markings, comfortable handles with cushion ridgesP/N 12-00233



11046 KLEIN 16-26 WIRE STRIPPER/CUTTER

Strips 16 to 26 AWG stranded wire, easy-to-read wire gauge markings, comfortable handles w/cushion ridgesP/N 12-00234



11054 KLEIN KURVE WIRE STRIPPER / CUTTER

Cuts, strips and loops 8-16 AWG Solid and 10-18 AWG Stranded wire. Precision shear-type blades for clean cuts on solid and stranded copper wire. Easy-to-read markings on both sides. Curved handles help reach into confined areasP/N 12-03218



KLEIN WIRE STRIPPERS 6-12

This lightweight Klein-Kurve wire stripper-cutter strips large gauge 6-12 AWG stranded wire and eliminates the need for a skinning knife. The tool clearly shears 6-32 and 8-32 screws and has a serrated pliers nose, which allows the user to pull, grip, and twist wire design and double-dipped textured grips provide control and comfortP/N 12-01456



63020 KLEIN-KURVE MULTI CABLE CUTTER

Designed with 3 different cutting blades; anvil cutter, a copper curved cutter & a steel cutter. Cleanly shears 6-32 & 8-32 screws, double-dipped comfort grips with curved handles, coil spring provides fast self-opening actionP/N 12-00496

KLEIN TOOLS CABLE STRIPPER / CUTTER




Klein Tools added its new QTR-Turn NM cable stripper/cutter with Klein-Kurve handles to its existing line of strippers and cutters. The QTR-Turn technology allows users to place cable in the upper jacket strippers, squeeze the handle, and turn one-quarter to completely sever the outer jacket. It utilizes spring-loaded action for self-opening ...P/N 12-01770



KLEIN 8-1/4" CABLE CUTTER

Cuts up to 1" diameter aluminum and copper coaxial cable, curved jaws firmly grasp cable, shear-type cutting blades, precision, one-hand shearing actionP/N 12-00497



CRIMPING/CUTTING TOOL

This tool is designed to crimp insulated and non-insulated 10 to 20 AWG solderless terminals & connectors. It has easy-to-read tool markings to identify the insulated or noninsulated crimping dies. Its tapered nose design works well in tight places and has specially hardened cutter in the nose for quick, clean cuts. Size: 9.75".

Lifetime warrantyP/N 12-00698

KLEIN SCREW-HOLDING SCREWDRIVERS

Unique screw-holding design in which screws are held at the tip of drivers for precise placement in tight, hard-to-reach places and allows both torquing and tightening of screws. Starts and drives screws with one hand when working in hard-to-reach spaces.

1/4" SlottedP/N 12-02702

1/4" PhillipsP/N 12-02701



KLEIN MULTI TOOL

This cutting, stripping, and crimping tool cuts and strips 8-22 AWG solid and 10-26 AWG stranded wire with built-in, knife-type wire cutter.

P/N 12-05715

PLIERS

Designed and built with exceptional quality standards in a tradition that dates back to 1857. Klein specializes in the making of the world's finest pliers, for the professional. What makes Klein pliers different is induction hardening of cutting edges, pliers head hardness, hot riveting and special handle hardness.



D228-8 KLEIN 8" DIAGONAL-CUTTING PLIERS

High-leverage, standard-bevel cutting knives, with hand-form style plastic-dipped handles.

P/N 12-00228



D203-6 KLEIN 65/8" LONG-NOSE SIDE-CUTTING PLIERS - Standard cutting knives at hinge, wraps, loops, and cuts, plastic-dipped handles.

P/N 12-00229



D203-6 KLEIN 85/16" HEAVY-DUTY LONG-NOSE SIDE-CUTTING PLIERS - Induction hardened cutting knives, greater cutting power, hot-riveted joint, plastic-dipped handles.

P/N 12-00230



D252-6 KLEIN 6" DIAGONAL-CUTTING PLIERS

All-purpose, heavy duty, tapered nose, induction hardened cutting knives, hot riveted joints, plastic-dipped handlesP/N 12-00231



5139 KLEIN CANVAS ZIPPER BAG

White canvas bag with strong zipper, convenient storage for tools, 7.5" x 12" overall size.

P/N 12-00239

NUT DRIVERS



The professional requires a number of nut drivers in a variety of sizes and types. Klein drivers feature convenience, comfort and efficiency in use, plus exceptional strength and durability. All Klein nut drivers are made of the highest quality tempered steel, carefully heat-treated for maximum strength.

631 KLEIN 7-PC. CUSHION-GRIP NUT DRIVER SET - Contains 3/16", 1/4", 5/16", 11/32", 3/8", 7/16", & 1/2" hollow-shaft nut drivers, roll-up plastic storage pouch.P/N 12-00238



610 STUBBY NUT DRIVERS

The #610-1/4 & #610-5/16 stubby nut drivers are designed for use in tight spaces and on hard-to-reach fasteners. The tools have cushion grip handles for greater torque and user comfort. Drivers are made for 1/4" & 5/16" hex nut and hex screw sizes. The tool shafts measure 1.5" long and overall 3.5" long.

#610-1/4P/N 12-00694

#610-5/16P/N 12-00695



KLEIN TIP NUT DRIVER SET 7-PC SET

Full Hollow Shaft design with Rare Earth magnetic tip. (Only with P/N 12-01594). Full hollow shafts facilitate work on long bolt applications. Cushion Grip handles allow for greater torque and comfort. Handle domes are color coded for easy identification. Internal flanges provide solid, twist-resistant shaft anchor. Chrome plated shaft helps prevent corrosion. Set contains Cat. No. 646-3/16M, 646-1/4M, 646-5/16M, 646-11/32M, 646-3/8M, 646-7/16M, 646-1/2M.

Klein nut driver 7pc. setP/N 12-00306

Klein driver 7pc Magnetic SetP/N 12-01594

TO

TOOLS

KLEIN HOLE SAW KITS



Klein Hole Saws feature bimetal cobalt construction which allows for heavy-duty cutting; they can cut through studs in one pass. They also have multiple knock-out slots and holes for easy core removal. Carbide grit hole saws work well for cutting abrasive materials and offer a smooth cut with minimal tear-out.

Electrician's Hole Saw Kit - Contains the most popular sizes for basic electrical work. Hole Saws: 7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2" Arbors: 7/16" (qty.2)
P/N 12-00969

KLEIN ELECTRICIAN TOOL SETS



Designed for beginner and experienced wiremen, these tool sets range in size from a basic 14-piece assortment to the 41-piece comprehensive collection. Each set contains Klein premium products, such as wire stripper/cutters, screwdrivers, and pliers, plus protective eye wear and a pouch or tool bag for toting and storage. Each set offers a cost savings when compared to buying the tools separately. Tools in Electricians sets have standard

handles. Tools in Journeyman sets have state of the art dual-material handles which provide a superior grip without sacrificing tool strength or durability.

14-Piece Electrician Tool SetP/N 12-00819
18-Piece Journeyman Tool SetP/N 12-00821
28-Piece Electrician Tool SetP/N 12-00820
41-Piece Journeyman Tool SetP/N 12-00822

KLEIN DIAGONAL CUTTING PLIERS WITH TAPERED NOSE



Easy working in confined areas. Short jaws and beveled cutting edges permit close cutting of wire. Induction-hardened cutting knives for long life. Hot-riveted joint ensures smooth action and no handle wobble. Plastic-dipped handles for comfort and ease of identification. Custom, US-made tool steel.

P/N 12-03373

KLEIN LIGHTWEIGHT FLUSH CUTTERS



These shears wire up to 18 AWG producing a flat, flush cut. Shear cutting greatly reduces cutting effort and minimizes fly-off. Cushioned grips and steel return spring for increased comfort during repetitive cutting. Ultra slim profile increases access in confined areas. Heat treated for increased durability. With 1/2" driveP/N 12-03360

PISTON PIN REMOVAL TOOL



This tool takes all the work and risk out of removing the piston pin. It works on Lycoming and Continental engines. Just slip it over the piston, turn the shaft and it pushes the pin out smoothly and cleanly. Vinyl coated tip prevents scratching and marring the pin or piston during removal. Will handle up to 5.5" pistons.

P/N 12-04810

ARC360 HOLE CUTTER



Panel knock put punches and hole saws work well for holes that are aren't too big but it gets harder and more expensive as the size of the hole increases.

You can cut holes with a router but cutting holes with a router is a cumbersome ordeal. The router is really just too big a tool to be swinging 360 degrees easily. You can set it to cut holes down to around 1.5 inches and up to around

10 inches. The tool's small size allows you to easily see your work as you are cutting. If you want an arc you can start and stop anywhere you want. It will cut any thickness of sheet aluminum.

The cutting speed in 032 thick 2024-T3 aluminum is around 40 inches per minute so you can cut a 4-inch diameter hole in less than 20 seconds.
P/N 12-01977

GREASE JOINT REJUVENATOR



Have you ever tried to push grease in through a grease fitting and couldn't? The Grease Joint Rejuvenator opens clogged grease joints and fittings effortlessly in less than a minute! • Opens clogged grease fittings & joints • Cleans and replenishes old and dirty grease fittings • Loosens dried grease in joints • Cleans ways and stays in milling machines and lathes • Lubricates bearings on farm, lawn & construction equipment.....P/N 12-01038

COMPRESSION WHISTLE ALERT



12-01041

No more burning your fingers and hands! Just Listen! Insert Whistle Alert™ into any 14mm spark plug hole and bump the engine until you hear the whistle. You are now on the compression stroke! • Easily find Top Dead Center compression stroke • Turn engine over from inside the car and listen for the whistle • Made of steel and aluminum • Made and assembled in the USA.

Whistle Alert (Rigid).....P/N 12-01039
Whistle Alert (Flex).....P/N 12-01041

KEARNEY SWAGER



This portable, hand-operated roll type swaging machine will swage MS type terminals onto galvanized and stainless steel cables from 1/16" diameter up to and including 3/16" diameter. Includes machine, a full set of roll dies, terminal gauges and feed guide adapters & instructions in a steel carrying case. Wt. 95 lbs. New manufacture. All replacement parts available.

Special order.P/N 12-01188

ATS PUSH ROD SPRING COMPRESSOR



You know how hard it is to get at the springs on the push rod tubes... Now, you can compress them and remove the tube in under a minute. Just slip this tool onto the spring and crank the shaft counterclockwise (an air ratchet works great for this) to compress the spring, and then give everything a wiggle and out it comes. It's a must-have tool when working on big bore Continentals. This tool will fit all production engines Lycoming, Continental, Franklin, and even most old radials.

P/N 12-04809



TACH DRIVE SEAL REMOVER

This straight forward tool will let you remove the tach seal in minutes time and time again.P/N 12-04820

STEELMAX POWER TOOLS - TENSIONMETERS

STEELMAX METAL CUTTING SAW 9 INCH



More efficient than any portable metal cutting process you are using now! • Increase Productivity - No Milling or de-burring with near surgical dry-cut technology. • Cuts a Variety of Metals, Plastic and Wood - Bring your saw to the work-piece while cutting mild steel, stainless steel and aluminum as easy as it cuts plywood. • Cool-to-the-Touch - No waiting for your workpiece to cool down. Just cut it and handle it. • Precise Cutting - With integrated laser sighting system.....P/N 12-01716

Accessories	Teeth	Arbor	Part No.	Price
9" Stainless Steel Blade	80T	1.0"	12-01805	.
9" Aluminum Blade	80T	1.0"	12-01807	.

STEELMAX DRYCUT SAW S14



Utilizing a 14" carbide tipped blade, the Steelmax S14 cuts through metal faster, safer and cleaner than abrasive chop saws in a fraction of the time and cost. Powered with a 15 amp motor and geared to turn slower than a chop saw, the S14 dry cutter cuts like a cold saw, but at a fraction of the cost. Sold standard with a 14" carbide tipped mild steel blade attached, heavy duty, industrial strength cast iron base and two position locking vise, this saw is ready for immediate action! Cuts solid mild steel up to 1" thickness; cut profiles: pipe, angles, channel with a depth of cut up to 4-3/4". Bevels to 45 degrees. Saves time and money giving cool cuts that need little to no finishing, eliminating any need for grinding or cool down time.....P/N 12-01717

Accessories	Teeth	Arbor	Part No.	Price
14" Stainless Steel (Less Than 1/4")	90T	1.0"	12-01809	.
14" Thin Mild Steel (Less Than 1/4")	90T	1.0"	12-01810	.

MAGNETIC BASE DRILL



SteelMax® brand drills maintain rigidity and accuracy throughout the life of the drill. The rail system eliminates the need to adjust or maintain traditional gibs. In addition to saving on maintenance, cutter life is increased by reducing movement at the cutter tips. When cutters last longer, you save money every day you use SteelMax! Magnetic Base Drill.....P/N 12-01718

Portable Magnetic DrillP/N 12-01811

CUTTERS FOR MAGNETIC BASE DRILL

Dia.	D.O.C.	Part No.	Price	Dia.	D.O.C.	Part No.	Price
7/16"	1"	12-01813	.	1/2"	2"	12-01834	.
1/2"	1"	12-01814	.	9/16"	2"	12-01835	.
9/16"	1"	12-01815	.	5/8"	2"	12-01836	.
5/8"	1"	12-01816	.	11/16"	2"	12-01837	.
11/16"	1"	12-01817	.	3/4"	2"	12-01838	.
3/4"	1"	12-01818	.	13/16"	2"	12-01839	.
13/16"	1"	12-01819	.	7/8"	2"	12-01840	.
7/9"	1"	12-01829	.	15/16"	2"	12-01841	.
1"	1"	12-01831	.	1"	2"	12-01842	.
1-1/16"	1"	12-01832	.	1-1/16"	2"	12-01843	.
7/16"	1"	12-01833	.				

Accessories for Base Drill	Part No.	Price
1" Center Pin For SM4374	12-01845	.
1" Center For 1" DOC Cutters	12-01844	.
2" Center Pin For SM437L Only	12-01847	.
2" Center For 2" DOC Cutters	12-01846	.

1/2 INCH CHUCK & ADAPTER



With this optional industrial arbors and 2MT-1/2" Drill Chuck now you can! SteelMax industrial arbors let you easily adapt our premium m2AL cutters to a variety of machinery, including CNC, lathe's, stationary drill presses and similar equipment. With our integrated coolant collar, cutter performance and cutter life is assured!P/N 12-01812

6 AND 13 PIECE CUTTER SETS

Description	Includes	Part No.	Price
6 Piece Set 1" DOC	9/16", 11/16", 13/16", 15/16", 1-1/16", Cutter Case, and 1" Pilot 9/16"-1-1/16"	12-01848	.
6 Piece Set 2" DOC	9/16", 11/16", 13/16", 15/16", 1-1/16", Cutter Case, and 2" Pilot 9/16"-1-1/16"	12-01849	.
13 Piece Set 1" DOC	7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" 15/16", 1", 1-1/16", Cutter Case, and 1" Pilot 7/16", 1" Pilot 9/16"-1-1/16"	12-01850	.
13 Piece Set 2" DOC	7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" 15/16", 1", 1-1/16", Cutter Case, and 1" Pilot 7/16"-1/2", 1" Pilot 9/16"-1-1/16"	12-01851	.

TENSITRON TRANSDUCERS

Tensitron's transducers convert a material's tension into a reliable signal that can be used for remote indication, high-speed recording, computer hook-ups, or as input for automatic tension control systems.

Note: A Signal Conditioner is needed to provide the necessary excitation, amplification, signal conditioning, calibration functions, display/readout and other options necessary to operate strain gaged transducers.

Attention: Tensitron products may not be cancelled or returned.



TENSITRON FIBER AND WIRE TRANSDUCERS

Model No.	Description	Tension Range	Part No.	Price
E-090-00	Single Roller Low Force Load Cell	1 - 100 lb.	12-05002	.
E-091-00	3 Roller Low Force Load Cell	1 - 100 lb.	12-05003	.
E-095-01	Notched Beam Transducer	10 - 1,000 lb.	12-05005	.
E-095-03	3 Roller Notched Beam Transducer	10 - 1000 lb.	12-05006	.
E-415-002	Small Space Transducer with Single Roller	5 - 5,000 g	12-05011	.
F-1806	Platform Mounted Fiber Transducer	5 - 5,000 g	12-05013	.
FT-107	Small Space Fiber Transducer	5 - 5,000 g	12-05014	.
FT-107-TIS	Small Space Fiber Transducer - Titanium	5 - 5,000 g	12-05015	.
FT-116	Low Profile 3 Roller Sensor	5 - 5,000 g	12-05016	.
FT-117	Single Roller Sensing Beam	5 - 5,000 g	12-05017	.



TENSITRON WEB AND BELT TRANSDUCERS

Model No.	Description	Tension Range	Part No.	Price
4260	Single Roller Web Transducer.	2-200 lb.	12-05001	.
E-091-02	Low Force Load Cell with Cylindrical Rollers	1-100 lb.	12-05004	.
E-095-04	Notched Beam Transducer with Cylindrical Roller.	25-250 lb.	12-05007	.
E-200-00	Cantilever Transducer	1-25 lb.	12-05008	.
E-202-00	Pillow Block Load Cell Transducer	25-1,000 lb.	12-05009	.
E-210-00	S Column Transducer	5-250 lb.	12-05010	.
E-415-003	Small Space Transducer with 3 Rollers	5-5000 g.	12-05012	.



OMEGA-NEWPORT INFCS TRANSDUCER SIGNAL CONDITIONERS

Model No.	Description	Part No.	Price
INFCS-000 B	Infinity Basic Signal Conditioner, 115 VAC	12-05023	.
INFCS-001 B	Infinity Basic Signal Conditioner, 115 VAC Analog Out	12-05024	.
INFCS-010 B	Infinity Basic Signal Conditioner, 115 VAC Dual 5A Relays	12-05025	.
INFCS-011 B	Infinity Basic Signal Conditioner, 115 VAC Analog Out & Dual 5A Relays	12-05027	.
INFCS-100 B	Infinity Basic Signal Conditioner, 230 VAC	12-05028	.
INFCS-101 B	Infinity Basic Signal Conditioner, 230 VAC Analog Out	12-05029	.
INFCS-110 B	Infinity Basic Signal Conditioner, 230 VAC Dual 5A Relays	12-05030	.
INFCS-111 B	Infinity Basic Signal Conditioner, 230 VAC Analog Out & Dual 5A Relays	12-05031	.
INFCS-411 B	Infinity Basic Signal Conditioner, 10 to 30 VDC Analog Out & Dual 5A Relays	12-05032	.

TO

CABLE TENSIONMETERS - SWAGERS

T5 2000 SERIES CABLE TENSIONMETERS



The familiar T5 Tensionmeter is a low cost, highly accurate, precision instrument giving cable tension readings covering a wide range. In use, each T5 instrument is calibrated at the factory and is provided with its own calibration chart for the simple conversion of readings into pounds-tension. The charts shown, indicate the riser which must be used to accommodate the

various cable sizes and tensions. The T5 is a small, lightweight, precision instrument, durably constructed for long accurate service.

Model No.	Cable Size	Range	Part Number	Price
T5-2002-101-00	1/16", 3/32", 1/8"	10-100	12-01144	.
	5/32", 3/16"	15-150		
	7/32", 1/4"	25-150		
T5-2002-104-00	1/16", 3/32", 1/8"	30-200	12-04805	.
	5/32", 3/16"	30-300		
	7/32", 1/4"	30-300		

TENSITRON ACM CABLE TENSION METERS



Standard Features of all models: • Easy one-hand operation • No interchangeable parts are needed to adapt to different cable sizes • Memory Lock Pointer holds readings until cleared • Calibration chart affixed to back of meter • Durable and made of non-corrosive materials • Weigh approximately 21 oz. Compact design allows engagement of meter onto cables closely routed along floors, flat surfaces and other minimum clearance areas. Models ACM-100, ACM-200, ACM-300, ACM-400 are compact enough to allow use in limited access panels as small as 4" dia.

Attention: Tensionmeter Products may not be cancelled or returned.

Model	Part No.	Price
ACM-100 - Designed to measure from 5-100 lbs tension in 1/16", 3/32", 1/8", 5/32" diameter cables.	12-01050	.
ACM-200 - Designed to measure 20-200 lbs tension in 1/16", 3/32", 1/8", 5/32", 3/16", and 1/4" diameter aircraft cables.	12-01051	.
ACM-400 - Designed to measure from 40-400 lbs tension in 3/32", 1/8", 5/32" and 3/16" diameter standard cables.	12-01053	.
ACM-600 - Measures tension from 40-600 lbs in 1/8", 5/32", 3/16" and 1/4" diameter aircraft cables.	12-01362	.

TENSITRON ACX-SERIES DIGITAL AIRCRAFT CABLE TENSION METERS



In its 5th generation of digital aircraft cable tension meters, Tensitron is using the latest technology, software, and design improvements providing unsurpassed accuracy and resolution for numerous material sizes and tension ranges. Select the cable size from the menu, press "Enter", engage the meter, and instantly see the actual numeric tension value on the display while simultaneously a dynamic colored bar graph indicates whether the tension is in the user's acceptable range. **Attention: Tensionmeter Products may not be cancelled or returned.**

Model	Range	Res.	Standard Cable Selections	Part No.	Price
ACX-100-1	5-100 lbs	0.5 lbs	1/16", 3/32", 1/8", 5/32"	12-03758	.
ACX-250-1	20-250 lbs	0.5 lbs	1/16", 3/32", 1/8", 5/32", 3/16"	12-03759	.
ACX-250-M-1	20-250 lbs	0.5 lbs	2.0 mm, 2.5 mm, 3.5 mm, 4.0 mm	12-03761	.
ACX-500-1	40-500 lbs	1 lbs	3/32", 1/8", 5/32", 3/16"	12-03762	.
ACX-CWT-1	20-250 lbs	0.5 lbs	CWT-5, CWT-10, CWT-15, CWT-20, CWT-25	12-03763	.
ACX-CMB-1	20-250 lbs	0.5 lbs	1/16", 3/32", 1/8", 5/32", 3/16", CWT-5 thru CWT-25	12-03764	.
ACX-CMB-M-1	20-250 lbs	0.5 lbs	1/16", 3/32", 1/8", 5/32", 3/16", & 2.0 mm, 2.5 mm, 3.5 mm, 4.0 mm	12-03766	.

LOCOLOC® HAND SWAGER NO. 1-SC



Designed for swaging copper and aluminum 1/16, 3/32, 1/8, 5/32 and 3/16 oval and stop sleeves, plus 7/32 stop sleeves, total of 11 sizes plus the ability to cut up to 7/32 diameter aircraft quality steel cable. A multi cavity hand cable swaging tool with a dozen functions. 26 inches long, weighs 6.5 pounds. Parts list included with each cable swaging tool. To assure proper swaging of Locoloc® aluminum, copper and stainless steel sleeves there is a Locoloc "Go" "No Go" gauge with each cable swaging tool.....P/N 12-12400

LOCOLOC® TRIPLE CAVITY HANDSWAGER



Locoloc® Triple Cavity Handswager is made of 4140 Carbon Steel Hardware for superior longer life. This has 3 cavities for the most commonly used sleeve sizes: 3/32", 1/8", 3/16". Eliminates confusion on the job site. It has an Adjustment Bolt for calibration.

Made in America.P/N 12-04960

LOCOLOC® HANDSWAGING TOOL



LocoLoc #1-3-SBHS Hand Swager – This tool is an outstanding small hand tool, and it does a great job of swaging small sleeves. This is a (4) cavity tool, swaging sleeve sizes 1/32", 3/64", 1/16", 3/32" and #12 SEISMIC. Ratchet mechanism will not release until swage is complete. Swages copper and aluminum sleeves only. Usage instructions and swage gauge included in each tool. Each LOCOLOC Swager is supplied with a gauge. Application: Copper Oval Sleeves, Copper Oval Plated Sleeves and Aluminum Oval SleevesP/N 12-00222

LOCOLOC® 0-3/32SC HANDSWAGER



Eye, lap and stop sleeve splicing of cables are made sure and easy with the new handswagers. Design features "over-center" leverage, which transmits a powerful snap-action to the final thrust of the jaws... assuring a tight, clean compression every time. Easy adjustment. Individual replacement parts are available. Parts list included with tool. To assure proper swaging of Locoloc® aluminum, copper and stainless steel sleeves Locoloc® includes a "Go/No-Go" gauge with each cable swaging tool free of charge.

Specifications: • Swages 3/32" oval and 3/32", 1/8" stop sleeves, plus 1/8" stainless steel oval sleeves • Length: 20" • Weighs 4.2 lbs.

P/N 05-22402

NICOPRESS SWAGING TOOLS - 64-CGMP



The 64-CGMP has four grooves and is used for Oval Sleeve in the range of cable sizes from 1/16" through 5/32". The "C" groove is also used for the No. 871-1-C Stop Sleeve. The No. 63V-XPM has three grooves and is used only with Oval Sleeves. For cable sizes 1/8", 5/32" and 3/16".

Cable Dia	Sleeves			Swaging Tools	
	Plain Copper	Zinc Coated Copper		64-CGMP	63V-XPM
1/16	MS51844-42	18-1-C	MS51844-22	28-1-C	X
3/32	MS51844-43	18-2-G	MS51844-23	28-2-G	X
1/8	MS51844-44	18-3-M	MS51844-24	28-3-M	X
5/32	MS51844-45	18-4-P	MS51844-25	28-4-P	X
3/16	MS51844-46	18-6-X	MS51844-26	28-6-X	X

64-CGMPP/N 12-02560

63V-XPMP/N 12-02561

SPECIALTY TOOLS

NO-GO GAGE



There are five measurements required for each pilot and co-pilot seat, these two tools will shorten the time to make these five measurements to minutes..... P/N 12-02861

OVAL AND STOP SLEEVE GAUGE 7/32-5/16



To assure proper swaging of Locoloc® aluminum, copper and stainless steel sleeves with Locoloc® tools these simple, "Go" "No-Go" Gauges will determine if your tools are out of adjustment or alignment.

When the proper slot in the gauge slips over the compressed area of the sleeve after swaging then your swage is satisfactory. If the proper slot does not fit over the compressed area of the sleeve after swaging, then your tool is out of adjustment. Your cable assembly will not hold the rated breaking strength of the cable, which should be the result when oval sleeves are used to form a loop or eye in a cable assembly. Stop sleeves must also be properly compressed and gauged to reach their rated loads which is 1/32 to 5/16 the breaking strength of the cable, depending on cable diameter.

Specifications: • GA-2P – Gauges 7/32", 1/4", 9/32", and 5/16".
• Made In The USA: YesP/N 13-24627




COMPASS FILLING AID

The compass filling aid is designed to be used for filling most standard aircraft compasses. The standpipe is simply attached to the compass with a supplied special rubber band. The compass is then filled and purged through the

standpipe. When all air is removed, and the level in the standpipe is constant, the plug is then installed through the filled standpipe. Thus the need for submerging for proper filling is eliminated.

P/N 12-17604



VENTURI REMOVING TOOL

Venturi extractor tool used on Marvel-Schebler®, MA-3® and MA-4® series carburetorsP/N 12-01908



THE PEN GRIP - PEN AND TOOL HOLDER

The Pen Grip attaches to almost any surface with double stick tape. Just peel off the backing on the attached double stick adhesive, press firmly onto the surface to which you want it attached and insert your tools. The unique gripping fingers hold all sorts of pens, pencils, & tools in many different positions, even upside down. Like the Tool Grip, The Pen Grip is available in White and Black. BlackP/N 12-00961

WIRE SPOON



Features: • Wire threader designed for threading wires into an already tied harness • 300 Series stainless steel construction • Made in America for superior quality. P/N 12-01801

FELCO CABLE CUTTERS



A cable when crushed or deformed is difficult to use with fittings. These fine quality Swiss made cutters, with unique triangular jaws, never leave a frayed end.

Felco No.	Max Cutting Dia.	Length	Weight	Part No.	Price
C2A	2mm	8"	.625 lbs	12-00223	.
C7F	3/16"	8"	.625 lbs	12-01135	.
C9	1/4"	13"	1.6 lbs	12-00179	.
C12	3/8"	19"	3 lbs	12-01174	.
C16	5/8"	22"	5 lbs	12-05133	.



1/4 INCH AIR DIE GRINDER - VT3000

- 1/4" Air Die Grinder - VT3000
- Lightweight - powerful compact design
- VT3000- 25,000 RPM
- All ball bearing construction for longer tool life
- Self-locking safety throttle lever to prevent accidental starts
- Ergonomic positive grip
- Rear exhaust.....P/N 12-02550



1/4 INCH AIR DIE GRINDER - VT3000A

- 1/4" Angle Type Air Die Grinder VT3000A
- Lightweight - powerful compact design
- All ball bearing construction for longer tool life
- Self-locking safety throttle lever to prevent accidental starts
- Ergonomic positive grip
- Rear exhaust.....P/N 12-02551



1/4 INCH AIR DIE GRINDER - VT3001A

- 105° angle type head
- Direct drive - no bevel and pinon gears to maintain
- One piece casting
- Ergonomic design for operator convenience
- Safety throttle lever
- Rear exhaust.....P/N 12-02553

DILLON MECHANICAL FORCE GAUGE



Model X-C comes in nine capacities ranging from 50 lb to 25,000 lb or 50 to 10000 kg. Allfeature accuracy of ±1% of full capacity, except the 25,000 (10000kg) capacity instruments which are accurate to ±2% of full capacity. Load is applied against a hardened ball which rotates to maintain vertical alignment as pressure increases. The ball is held in place

with a spring clip or retainer. A threaded mounting hole is located opposite the loading ball in the bottom of the beam. Model X-C is available in pound and kilogram capacities.....P/N 12-03326



DZUS SNOOPY TOOL

Classic tool designed for Dzus fasteners found on warbird and antique airplanes. Tool matches the most common size slots in 1/4 turn fasteners, giving the tool the distinctive "snoopy" shape. This tool is made from heat treated 4130 aircraft steel, with a riveted wooden handle – exact copy of the original tools. Made in the USA.P/N 12-04763



QUICK-CHECK TENSION METERS

The Dillon Quick-Check can be placed on a cable, measure its tension, and removed in under five seconds! There are no complex lookup tables, no conversion charts. The operator can quickly select from 15 different wire sizes and types stored in Quick-Check's memory. The Check-Tensioning mode graphically displays the current and target tensions for extremely quick setting of line tension. Even the infrequent battery changes are quick. The Quick-Check can be employed in many industries to ensure proper tensioning. Typical applications include tower and stack guy wires, pretensioned cable barriers, bridges, elevators, winch rope, overhead electric transit wires, fall arrest systems, aircraft cables and utilities.

Features: • Sheaves with bearings eliminate friction and provide the best accuracy • Accommodates a wide range of wire sizes and styles • Telescoping handle engages meter quickly with minimal effort • Highly visible yellow finish • Easy-to-read display with full-text prompts • Easy to use soft-key interface • Uses popular AA batteries and has long life between changes.

2000 Lb.P/N 12-03324

10000 Lb.P/N 12-03325



AN VISE JAWS

Generally AN Vise Grips are cheap castings that lack the precision mating surfaces necessary to avoid unsightly tool marks on your fresh hose assemblies. This is especially true with black anodized fittings so prevalent today. Get rid of your old vise jaws and stop using the sharpie to cover mistakes.....P/N 04-03665

TO

STRUT PUMPS – DEBURRING TOOLS

DEBURRING TOOL



Utilizes a twist-of-the-wrist action for deburring holes and radii. Curved blade automatically follows all contours. Telescoping blade holder extends to reach deep internal holes. Supplied with one #10 and one #20 deburring blade.P/N 12-00700

Item	Description and Application	Part No.	Price
#10 Deburring Blade	High-speed steel. For steel, aluminum & smaller holes	12-00800	.
#20 Deburring Blade	High-speed steel. For brass, Bronze, cast iron, larger holes.	12-00900	.
#40 Scraper Blade	High-speed steel. Small triangular blade.	12-01000	.
#42 Scraper Blade	High-speed steel. Large triangular blade.	12-01100	.
#48 Scraper Blade Holder	Holder has 10-32 threads. Accepts #40 & #42 blades. Extends to 3-1/2".	12-01200	.
#50 Scriber	Carbide-tipped scriber.	12-01300	.
#60 Deburring Blade	For backside deburring & for restricted positions	12-01400	.
#70 Deburring Blade	Carbide-tipped blade for deburring edges of sheet metal.	12-01500	.



DEBURRING & SCRAPING KIT

Standard duty kit includes MANGO II Handle, "B" Blade Holder, "C" Blade Holder, B10, B20, B30, B60, B11, B70, C40 blades and the "C" KeyP/N 12-03194



PRO SERIES STRUT SERVICE TOOL

The Pro Series Strut Service Tool has all the great attributes of the original Strut Service Tool, with the addition of a dual tank and dual check valve design. The longer service hose makes it easy to attach. Strut pressure, fluid and foam is captured in one tank. Clean, foam-free fluid is drawn back into the strut from the second tank. Simplicity, cleanliness and less waste make this tool a must-have. The strut valve core is not removed.P/N 12-00677

SPOTFACE KIT



The Spotface Kit tool makes a flat spot for screws. This tool is specifically modified to provide rail cap clearance for use on seat rails. Cutter comes with 1/8", 5/32", 3/16" pilots.P/N 05-04429

BALLPOINT HEX SOCKET DRIVER



3/32" Ballpoint Hex Socket Driver for use on hex head screws and nuts. ***This tool is commonly used with most avionics units like Honeywell Bendix/King and Garmin.**.....P/N 12-02063



HX STRUT PUMP

Boost air to 1000psi without an air compressor.

- Very portable. No air compressor needed!
- Use air bottle, spare tire, tire pump for source air.
- Can also use with air compressor for air source.
- Detailed instructions.
- Equipped with 7 foot hose.


P/N 12-16710

10X STRUT PUMP



Aircraft Strut Pump 10X delivers up to 1,500 PSI of pressure to raises struts without the need to place the airplane on jacks. Safety one-shot air delivery system gives you maximum control over the entire process -- each stroke of the delivery valve injects a small shot of high pressure air into the strut so that you can raise it in controlled increments. There is virtually no chance of you accidentally overpressurizing and possibly damaging your struts.....P/N 12-03731

15X STRUT PUMP

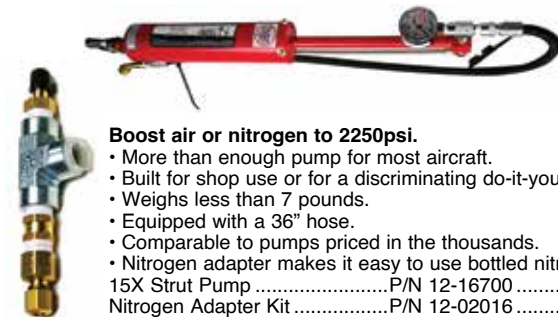

Boost air or nitrogen to 2250psi.

- More than enough pump for most aircraft.
- Built for shop use or for a discriminating do-it-yourselfer.
- Weighs less than 7 pounds.
- Equipped with a 36" hose.
- Comparable to pumps priced in the thousands.
- Nitrogen adapter makes it easy to use bottled nitrogen.

15X Strut PumpP/N 12-16700
Nitrogen Adapter KitP/N 12-02016

STRUT SERVICE TOOL



Service Strut in your Sunday Suit.

- Clean way to service struts.
- Strut valve core is NOT removed.
- Hose fitting releases pressure & fluid into the bottle.
- Raise & lower strut a few times, then apply the chargeP/N 12-16792

BOGERT PRESSURIZED STRUT FILLER 16M-PSF



Finally a real time and money saver! This tool changes the way landing gear struts are serviced. No longer do you have to put an aircraft up on jacks to add fluid to and fill Oleo type landing gear. This is a totally clean and safe process. No oil is spilled. The strut valve is not disturbed and the plane is sitting on the ground the whole time. This is safe for the technician and the aircraft.

Features: • It is a convenient, small, compact system, easy to use, and neat to store • Two tank system. One tank contains clean Strut fluid and the other collects the excess • Built in pump forces fluid into the strut to top it off and the excess is drained off controlled right from the unit • Large capacity 5 qt storage tanks are big enough for just about any strut • Can be used on struts requiring up to 3000 psi strut pressure • Made in the USA. Strut Filler.....P/N 12-03166

PINSTRIPING – SPRAY SYSTEMS

THE BEUGLER STRIPER PROFESSIONAL PINSTRIPING TOOL



The Beugler tool makes accurate lines consistently, without gravity or pressure, eliminating the need for tape. The unique serrated wheel and wheel head design are the secret to the striper's success. Ideal for any art project, the Beugler Striper is a professional tool used by auto, truck and motorcycle painters around the world. Beugler's magnetic guide securely holds to any steel surface, allowing the striper's guide arm to slide smoothly along its recessed groove for long, accurate, straight, or arced lines. To ensure customer satisfaction, Beugler also offers a 40 minute video tape or DVD with instructions, tips and demonstrations. The Beugler Striper works well with any "creamy" consistency paint. You can stripe at any angle, as the tool is not gravity fed. Both Professional and Deluxe Kits are of the same quality and include guides, clean up brush, 2/3 oz. paint barrel (which stripes 250 to 1750 feet, depending on stripe size) and complete instructions. Length 4-1/4". O.D. 3/4".

Description	Part Number	Price
Deluxe Kit (Includes 3 Striping Heads)	12-01696	.
Professional Kit (Includes 7 Striping Heads)	12-01695	.

MINI-AIR POWERED VACUUM



Runs off of an air compressor and is simple to use. Just plug it into the air hose using the adapter (included) & start cleaning. The body of the unit is plastic or cast aluminum construction with an 18" clear plastic flex tube that can easily get into tiny spaces to clean. The canvas bag is easily removed. Wt. 8.5 oz.

Mini-Air Vacuum - plasticP/N 12-16820
Mini-Air Vacuum - aluminumP/N 12-16821

HAND VACUUM/PRESSURE PUMPS



Mityvac vacuum gauges are scaled 0 - 30 inches of Mercury (0 - 100 kPa). Compound gauges included on dual vacuum/pressure converter pumps are scaled 0 - 30 psi (0 - 200 kPa) pressure, and 0 - 30 inches of Mercury (0 - 100 kPa) vacuum. All Mityvac pumps produce vacuum at the front port. Dual converter pumps are capable of producing vacuum or pressure at the front port. A rotating knob on the side of the pump allows the operator to switch between vacuum and pressure. Dual converter pumps include a compound gauge for indicating levels of both. All Mityvac

pump vacuum/pressure ports fit standard 1/4" (6.4 mm) ID tubing.

Features: • Produces vacuum or pressure at the turn of a switch • Comfortable ergonomic design • One-finger trigger vacuum/pressure release • Pressure and vacuum are created on the squeeze stroke for superior accuracy and control • Includes durable, accurate gearless diaphragm style compound vacuum/pressure gauge with pinned connection for 360° rotation.

Specifications: • Pump Displacement: 1 in3 (16cc) per stroke • Max. Pressure 30 psi, 207 kPa • Material: PVC • Vol. per Stroke: 1 cu. in. / 16cc • Gauge1: Yes • Dual Converter2: Yes • CE Certified: Yes • Weight: 11.5 oz 326 g • Country of Origin: China, Designed and quality controlled in the USA.

StandardP/N 15-08423
DeluxeP/N 15-08422

FUJI SPRAY MINI-MITE 3 PLATINUM™ SYSTEM



Paint faster and better with the Mini-Mite 3 PLATINUM system. This system features the Fuji T-Model gravity spray gun and has the same powerful three-stage turbine motor as used in Q3 models.

This system is compatible with all coatings when properly thinned and you can adjust the size of the fan pattern with the control knob on the spray gun. This portable system includes a heavy-duty metal case with a spray gun holder, the Mini-Mite 3 PLATINUM Turbine, a 25 ft. hi-flex hose, the T-75G non-bleed spray gun, a viscosity cup, a cleaning brush and a wrench.P/N 12-06927

FUJI SPRAY MINI-MITE 4 PLATINUM™ PAINT SPRAYER SYSTEM



If you are a mobile technician looking for a durable and portable spray system with enough power to atomize professional base and clear coat finishes, including 2K paints, then look no further than the Mini-Mite PLATINUM™ Series. This lightweight

and easy to use spray system will allow you to achieve a flawless finish every time. The Mini-Mite PLATINUM™ Series provides the power and portability that the industry demands. This lightweight unit offers a small footprint allowing you to maximize your work environment without sacrificing performance.P/N 12-06928

FUJI SPRAY MINI-MITE 4 PLATINUM™ PAINT SPRAYER SYSTEM



5-Stage Mini-Mite PLATINUM™ Series Turbine (9.5 PSI). The additional power allows the user to apply heavier coatings and thicker viscosity finishes faster and with less time spent on preparation of materials. The Heat Dissipation Chamber™

is an industry-leading method resulting in an increase of the lifespan of your Fuji Spray turbine motor, compared to standard turbines. There is no added hiss or loud whistling noise, and no blowing around of debris.P/N 12-06929

FUJI SPRAY Q5 PLATINUM™ PAINT SPRAYER SYSTEM



A key feature unique to the Q5 PLATINUM™ Series is the Variable Speed Control Dial, offering you the ability to adjust the psi/cfm to the optimum setting needed.

The Fuji Spray® Q PLATINUM™ Series is for those who simply want the best spray experience. Considered the quietest operating turbine on the market today, the Q PLATINUM™ Series is the ultimate tool in terms of power and control, allowing you to focus on what really matters. The patented noise reduction technology coupled with the unique Heat Dissipation Chamber™ makes the Q PLATINUM™ series stand out in the industry. The Q PLATINUM™ Series systems are perfect for medium to heavy painting projects, as well as finishing cabinets, furniture, trim and more.P/N 12-06919

FUJI SPRAY D6™ 6-STAGE HVLP SPRAY SYSTEM



Fuji Spray's D6 sets a new benchmark in the spray finishing industry, offering a powerful 6-stage motor rated at 11.5 PSI. Engineered for

efficient and cooler operation, the D6 is designed to prolong motor life and maximize return on investment. With 6 pre-set pressure settings, users gain precise control over spray output, ensuring professional-grade results with minimal overspray and waste. The D6 system consistently provides warm, dry air, atomizing even the highest viscosity coatings with virtually no thinning required. This results in stunning finishes and even coverage every time. Built with a rugged design, the D6 ensures unmatched longevity, whether used in the workshop or at the job site.P/N 12-06920

FUJI SPRAY GUNS AND ACCESSORIES

Description	Part No.	Price
Fuji Spray T75G™ Spray Gun	12-06935	.
Fuji Spray T70™ Spray Gun	12-06925	.
Fuji Spray MP-V8™ Mid-Pressure Spray Gun with 600cc Nylon Cup	12-06933	.
Fuji Spray H-V8™ HVLP Spray Gun with 600cc Nylon Cup	12-06934	.
Fuji Spray Pressure Tubes with Check Valve - Long Gravity Feed - 5 Pack	12-06940	.
Fuji Spray 6ft Flexible Whip Hose	12-06941	.
Fuji Spray Spray Gun Cleaning Kit with Lubricant	12-06939	.
Fuji Spray Filters for Mini-Mite PLATINUM™ Only	12-06938	.
Fuji Spray Q-Turbine Filter	12-06937	.
Fuji Spray Cup Parts Kit	12-06936	.
Fuji T-70 I T-75G Air Cap Set - 1.0mm 5100-2	12-06930	.
Fuji T-70 I T-75G Air Cap Set - 1.5mm 5100-4	12-06931	.
Fuji T-70 I T-75G Air Cap Set - 1.8mm 5100-5	12-06932	.
Fuji Spray Pressure Regulator Gauge - Analog	12-06926	.
Fuji MP-V8 - Air Cap Set - 1.2mm 6800MP-V8-1.2	12-06921	.
Fuji H-V8 - Air Cap Set - 1.3mm 6890H-V8-1.3	12-06923	.

SPRAY EQUIPMENT - INSPECTION MIRRORS

PREVAL SPRAY GUN



Sprays paints, primers, gel coats, lubricating oils, cleaners, zinc chromate, etc. The Preval Sprayer is a professional grade spray system that is good for countless applications. It's disposable, recyclable, easy to clean, and, best of all, no compressor is needed. The Preval Sprayer's patented venturri vacuum process pulls liquid from any compatible, removable, and refillable container and delivers a professional-grade spray stream to virtually any surface. It's amazing.

- Easy replacement and cleanup with interchangeable and disposable parts
- Customize your color or use with the medium of your choice
- Store media in containers for easy reuse
- Great for DIY projects
- Professional- grade finish

#267 Complete Set.....P/N 09-00339
#268 Power Unit.....P/N 09-00340
#269 Product Container.....P/N 09-00341



PREVAL PROPACK SPRAY SYSTEM

Deliver twice the spray with the Preval Pro-Pak : two complete Preval Spray Systems in one money-saving package. Each versatile Preval sprayer is made in the USA and delivers 16oz. of almost any paint or liquid, offering unparalleled versatility for small projects and touch ups.

In The Box:

2 – Preval Sprayer Units
2 – Glass bottles
2 – Long dip tubes.....P/N 09-04560



PREVAL VALPACK SPRAY SYSTEM

Preval Sprayers' best value for your workshop, garage, job site and around the house.

The Preval Val-Pak is a complete assortment of Preval Sprayers and sprayer accessories. This cost-effective kit provides everything you need to apply multiple types of paints, chemicals, finishes, coatings and most other liquids in a multitude of prep, touch up and maintenance applications.

Ideal for commercial use and DIY projects, every Preval Power Unit atomizes up to 16oz. of virtually any liquid.

Included with the Val-Pak kit are accessories and extra bottles that enable you to switch easily between different liquids for different projects, then store the remaining material in the reservoirs for later use.

Easy to clean. Each Power Unit can be reused for multiple applications.

In The Box:

• 1 – Preval Sprayer with bottle and tubes • 1 – Preval vGrip • 2 – Preval Replacement Power Units • 8 – Spray buttons • 4 – 6oz. glass reservoirs • 4 – 6oz. plastic reservoirs (solvent proof) • 4 – 3oz. plastic reservoirs w/cap (solvent proof) • 8 – Bottle lids • 4 – Short dip tubes • 16 – Long dip tubes

Made in the USA.P/N 09-04531



PREVAL UNIVERSAL VGRIP HANDLE

vGrip Universal Handle is a 2-in-1 gun handle and ergonomic trigger that snaps onto the Preval Sprayer with ease. Also attaches to any other standard aerosol can. (handle only). This is a replacement part for the Preval Valpack (09-04531).

P/N 09-04563

INSPECTION MIRRORS AND MAGNIFYING MIRRORS FOR ALL-ANGLE VIEWING



Double ball-joints of tempered spring steel move freely, hold desired position for viewing to 360°. Mirrors have brushed stainless steel backs and insulating vinyl grips. Refill mirrors available.

Description	Size	Length	Part No.	Price
A-2 Circular Pocket mirror	7/8" Dia.	7.5"	12-01080	.
A-2M Circular Magnifying Pocket mirror	7/8" Dia.	7.5"	12-01081	.
B-2 Oval Pocket mirror	1" x 2"	8.5"	12-01169	.
C-2 Circular Telescoping Mirror	2-1/4" Dia.	10" to 14"	12-01175	.
C-2M Circular Magnifying Telescoping Mirror	2-1/4" Dia.	10" to 14"	12-01176	.
K-2M Rectangular Magnifying Telescoping Mirror	2-1/8" x 3-1/2"	11.25" to 14.25"	12-01152	.
K-2 Rectangular Telescopic Inspection Mirror	2-1/8" X 3-1/2"	11-3/8" to 15-1/4"	12-05311	.

Description	Part No.	Price
HTE-2 with 1.25" mirror for viewing in tight areas telescopes from 6.5" to 35"	12-01090	.
HTC-2 with 2.25" mirror for viewing in less restricted areas telescopes from 6-1/2" to 36-3/8".	12-01089	.
HTS-2 Circular Telescoping Mirror Dia. 3-1/4" Length 6.5"- 29". Double ball-joints of tempered spring steel move freely, hold desired position for viewing to 360°	12-01091	.
HTC-2LT with 2.25 LED case illuminates darkened areas - two lithium batteries included. All-angle ball joint holds lighted mirror head firmly for perfect viewing textured cushion grip will not slip in wet or oil hands. Stainless steel handle telescopes from 6-3/4" to 37"	12-01979	.



ACCESSORIES

Mirror Size: Dual 1"x2" Weight: 2 oz.

Refill mirror for 1" x 2" oval inspection mirrors.

P/N 12-01084



THE INSPECTOR ADJUSTABLE LIGHTED INSPECTION MIRROR

No more trying to aim a flashlight at the old style mirror. Inspector is a one-hand tool that comes with a very bright light that illuminates the total inspection area. Easy to adjust the mirror angle. Once inserted into the inspection area, simply push or pull the thumb knob for a 90° mirror angle adjustment. The product is constructed of non-conductive materials for safety. The mirror, lamp, and 2-AA batteries (included) are easily replaceable.

Inspector Replacement Lamp...P/N 12-15110

Inspector Replacement Mirror ..P/N 12-15115

BLASTING SYSTEMS

VAC BLAST PORTABLE VACUUM BLASTER



This portable 28-gallon vacuum unit blasts, removes and recycles abrasives in one operation. It works with glass beads, aluminum oxide, steel grit, garnet, plastic grit, walnut shells, corn cobs and more. Rolls easily on 6-inch wheels. What's included: (1) 28-gallon vacuum blaster (1) 8-ft. air and vacuum hose (1) Gun and brush assembly (1) 6-ft. power cord (2) Wheels (1) Replacement nozzle. **Specifications:** Operating PSI: 115 - 140 (Max), Capacity: 28 gallons, Vacuum motor: 1100 watt, 120V, 1.5 HP, Air Consumption at Load (CFM): 15 at 80 PSI, Body Material: Steel, Body

Finish: Powder-coated, Recommended Media: Glass beads, aluminum oxide, steel grit, garnet, plastic grit, walnut shells, corn cob, Hose length (ft.): 8, Nozzle Size (in.): 1/4, Tire Size (in.): 6 Dimensions L x W x H (in.): 15 x 15 x 41, Manufacturer Warranty: 1 year limited warranty, Ship Weight: 88.0 lbs. P/N 12-02647

MONSTER BLAST CABINET



The Monster Blast Cabinet is constructed of 14-gauge steel for strength and durability. It features a built-in dust collector and large work area to handle bigger pieces. Foot pedal control and side-mounted light switches for easy control. What's included: (1) Blast cabinet (1) Blast Gun (4) Nozzles (two 7/32in., two 9/32in.) (1) Air regulator (2) Blast gloves (1) Foot pedal (4) Fluorescent lights (5) Extra window and (5) extra light underlayment sheets. **Features:** Large front door for easy loading. Heavy-duty 90 CFM dust collector improves visibility during blasting. Rear-mounted dust collector saves floor space. Convenient foot pedal operation. Large work area. Large viewing window: 30 inches x 15 inches. Heavy-duty steel grate holds up to 400 pounds! 4 fluorescent bulbs provide a very bright work area. Monster-sized 443 pounds! Heavy-duty 14 gauge steel has a resilient powder-coated finish. Gas-charged hydraulic hinges provide smooth and easy opening / closing. Power controls are lighted and within easy reach on side of cabinet. Blast-gun hook inside cabinet.

P/N 12-02648

BLASTING ABRASIVES



Removes paint/corrosion/rust from military, commercial and private aircraft while preserving anodized and alclad surfaces. Customers and usages include: Bell Helicopter Textron, U.S. Air Force, U.S. Navy, U.S. Marine Corps, U.S. Army, Pratt & Whitney, Commercial Airlines(MRO), FAA Repair Stations, turbine blades. **Note: Priced and sold in 25 lb bags.**

Model No.	Description	Part No.	Price
T-2 Urea	T-2 Urea, with a Barcol Hardness of 54-62, is our most versatile plastic blast media. It is highly suitable for a broad range of cleaning and stripping applications, including aircraft, automobiles, marine vessels, trucks, and trailers. Superb results can be expected in the removal of paints, anti-corrosion coatings, hydrocarbon deposits, waxes, oils, adhesives, and sealants, to name a few. T-2 for optimum results on a variety of applications!	12-03810	.
T-3 Melamine	T-3 Melamine, with a Barcol Hardness of 64-72, is our most aggressive, fast blast media. It is highly suitable for a broad range of cleaning and stripping applications, and is highly desirable for replacing glass beads and other harsh abrasives. Best results can be expected in the removal of stubborn paints, printers, hydrocarbon deposits and other hard materials such as molds, engines, iron, and steel. T-3 for maximum aggression and performance on harder substrates!	12-03811	.
T-5 Acrylic	T-5 Acrylic, with a Barcol Hardness of 46-54, is especially suited for a broad range of applications that require high stripping rates coupled with the need to insure surface integrity. T-5 Mil Spec media meets or exceeds the requirements set forth in Mil-P-85891A. Ideal for aircraft components, it is also excellent for powder coating removal from pultruded aluminum parts, thin fiberglass components, thin gauge metals, and of course, aircraft components. T-5 Mil Spec for optimum results where surface integrity is a must!	12-03812	.

CABINET BLASTERS



100 CFM dust collector included with all steel cabinets. HD 14 gauge steel - welded seams. Full width top door. Optional additional side door. Optional foot pedals or ALC pistol grip trigger gun. High quality lined 24" gloves. Cushioned foam armholes.

Specifications: Work Area: 36" or 48" or 60" W x 24"H x 24"D. Height: 60", Door Options: Double Doors, Top Door Opening: 13" x 35", Side Door

Opening: 11" x 17", Gun Options: Foot Pedl, Weight: 36" - 272, 48" - 303, 60" - 333.

Cabinet 36".....P/N 12-02563

Cabinet 48".....P/N 12-02564

Cabinet 60".....P/N 12-02565

PORT-A-BLAST SANDBLASTER



The Port-A-Blast sand blast gun is a complete sand blast unit. Fill the container with the abrasive material, connect the gun to your air line and it is ready to go to work. Will operate on air pressure as low as 60 PSI. However, for best results, pressures of 100-500 PSI are recommended. The greater the pressure the faster the cutting. The gun can be used to siphon abrasives or liquids

directly from a hopper or bucket, using a flexible siphon tube, and eliminating the 1Qt. container.

Compatible Abrasives: • Silica Sand - the cheapest and most widely used for average work • Glass Beads • Black Beauty Abrasive • Aluminum Oxide Abrasives - for fast cutting and fine texturing and etching • Nut Shell Abrasives - for cleaning and polishing hard under surfaces without scratching • Metal Shot - for removal of hard surfaces such as porcelain.

Port-A-Blast Gun.....P/N 12-00172

Flexible Siphon Tube.....P/N 12-00173

Replacement Ceramic Nozzle.....P/N 12-00493

Steel Nozzle.....P/N 12-05604

DELUXE PORTABLE PRESSURE BLAST SYSTEMS



Model 1000

These Portable Pressure Blasters are designed to make the most efficient use of your air and abrasive supply. These are not inexpensive siphon units. The entire tank is filled with air and sand under pressure. When the nozzle and valve is opened the sand/air mixture is released under tremendous pressure to quickly remove paint, rust, scale and other coatings. These units are 3-5 times faster to use than siphon units. All units arrive complete with air gauge, pressure vessel, sandblast hood, and sandblast hose. Simply fill with abrasive and attach to your air supply and you are ready to begin blasting. Order by Part no.

Spec. Chart	Model 1000
Operating Pressure	60-125 psi
ASME Tank	Yes
Sandblast Hose	10 feet
Abrasive Capacity	100-120 lb.
Nozzle Size	1/8"
Part Number:	12-20735
Price:	.

ABRASIVES - Black Beauty: Economical, fast cutting abrasive. For quick removal of paint and rust. 80# bag....P/N 12-20740

TO

BLASTING SYSTEMS- TIG WELDERS



DUAL STATION BLASTING CABINET

2 operators can blast simultaneously. No long delays for moving blast items, operator can simply change stations. 2 siphon blast guns. 2 90 CFM dust collectors. 4 Bright florescent tube lights. 2 pairs of 7"x33" blast gloves. 2 Air pressure regulators. 2 Foot pedal controls. 10 Extra protective window underlays. 5 Extra protective light underlays. 8 Extra nozzles - 4 Ea. 6mm and 7mm. Lighted power controls. 1 Year warranty.

P/N 12-04818



BLASTER KIT (F-50)

Use dry abrasives only. Hose length - 7ft. Tank capacity - 50lbs. Free standing open top tank. Maximum 125 psi. 7 CFM@80 psi minimum. Lightweight and portable. Easy setup. Steel nozzles - 13/64", 1/4", 5/16"

P/N 12-02548



BLASTER KIT (F-90)

Use dry abrasives only. Hose length - 10 ft.. Tank capacity - 90 lbs. Strong tubular steel cart. Wheels - 6". Maximum 125 psi. 7 CFM@80 psi minimum. Lightweight and portable. Easy setup. Steel nozzles -13/64", 1/4", 5/16"

P/N 12-02549



TRIPLE DOOR BLAST CABINET

48x24" Triple Door Blast Cabinet
Features: • Full width top door • Two side doors • Foot pedal • Fluorescent light • 90 CFM dust collector attached • Pressure regulator • Replaceable window underlays • Includes 4 nozzles • Some assembly required.

P/N 12-02858



BENCHTOP CABINET BLASTER

30x20" Bench Top Blast Cabinet
Features: • Made of tough LDPE polymer • One-piece construction (no leaks) • Self-adhesive underlay • Pistol grip trigger gun • Overside top window/door

Specifications: • Work area: 30"W x 27"H x 20"D • Height: 28" • Weight: 34 lbs.....P/N 12-02857

TIG TORCHES & REPLACEMENT CABLES



TIG TORCH OUTFIT 125 AMP

125 amps, light duty, air cooled torch outfit with flex head, Superflex cable, and 35M dins gas through connector.

P/N 12-00391

REPLACEMENT CABLE

12-1/2 foot Superflex replacement cable for the 12-00391.

P/N 12-00399

TIG TORCH OUTFIT 210 AMP

210 amps, heavy duty, air cooled torch outfit with Superflex cable and 35M dins gas through connector.....P/N 12-00392

REPLACEMENT CABLE

12-1/2 foot Superflex replacement cable for 12-00392.

P/N 12-00401



TIG TORCH ACCESSO- RY 9 GAS LENS KIT

TigDepot Parts Kits provide all the torch accessories you need to start welding. Parts Kits provide collets, collet bodies, a back cap, alumina nozzles and tungstens in a variety of sizes, all packaged in an easy to carry reclosable box.

Specifications: The 9GL-Kit comes with .040, 1/16, 3/32 Collets, Gas Lens Collet Bodies, Gas Lens Nozzles, (#5, #6, #7), a long Back Cap, and an assortment of 2% Thoriated and Ceriated Tungsten in a convenient plastic box. For the 9 Series torches.

P/N 12-00393



TIG TORCH ACCESSORY 17H GAS LENS KIT

The TigDepot 17H Gas Lens Kit is made specifically for the 210 Amp 17H Torch.

The Kit includes One of each:
• 2% Thoriated Tungsten .040, 1/16, 3/32 DIA. • Alumina cups #5,6,7 • Gas lens .040, 1/16, 3/32 • Collets .040, 1/16, 3/32 • Backcaps-short,medium, long • Insulator • Tool box

P/N 12-00394

BRAZING AND SILICON BRONZE



Tig Silicon Bronze .062P/N 12-00470

TIG WELDING EQUIPMENT & ACCESSORIES



FULL ARM WELDING GLOVES

Full Arm Welding Gloves. Industry First! - 21" glove with heavy duty padding on the forearm and elbow for comfort. Super supple Genuine American Deerskin tanned in U.S.A. Boarhide™ leather heat shield patch, reinforced palm, cuff and lean-on patch. Sock-lined FR (flame resistant) cotton fleece insulated. Boarhide™ leather pull-strap. Sewn with Kevlar® thread. Complimentary 3" carabineer to keep gloves together with exclusive Caiman® loops on each pair. Kontour™ - Exclusive 3-Dimensional, pre-curved fingers, and form-fitting design for ultimate fit, comfort & dexterity. Patches, padding and reinforcements for comfort & protectionP/N 13-20151



MAGNETIC UNI-JIGS

Magnetic holders for hands-free support in a variety of applications. Designed to last a life time. Each angle is screwed (not riveted) completely through the magnet to insure proper angles.

Small (supports up to 45 lbs.)
P/N 12-05185

Large(supports up to 80 lbs.)
P/N 12-05186



TIG TUNGSTEN

Sold in packages of 10

2% Thoriated
1/16P/N 12-00438

3/32P/N 12-00439

2% Ceriated
1/16P/N 12-00440

3/32P/N 12-00441

Pure
1/16P/N 12-00442

3/32P/N 12-00443



TIG FILLER MATERIALS

36" Cut Lengths are packaged in 1 lb. tubes to provide you the flexibility of buying only what you need for your job.

Base Material	Use Filler	Size	Part No.	Price/Lb.
4130	ER80S-D2	.035	12-00473	.
4130	ER80S-D2	.045	12-00474	.
4130	ER80S-D2	.062	12-00475	.
4130	ER70S-2	.035	12-00477	.
4130	ER70S-2	.045	12-00478	.
4130	ER70S-2	.062	12-00479	.
Aluminum	ER4043	.045	12-00480	.
Aluminum	ER4043	.062	12-00481	.
Aluminum	ER5356	.045	12-00482	.
Aluminum	ER5356	.062	12-00483	.
Stainless Steel	ER312	.035	12-00484	.
Stainless Steel	ER312	.045	12-00485	.
Stainless Steel	ER312	.062	12-00486	.
Stainless Steel	ER308L	.035	12-00487	.
Stainless Steel	ER308L	.045	12-00488	.
Inconel	Nickel 625	.035	12-00490	.
Inconel	Nickel 625	.045	12-00491	.
Super Alloys	Alloy W	MKT	Special Order	Call
Titanium	Titanium	MKT	Special Order	Call
Magnesium	Titanium	MKT	Special Order	Call



CUTTING TORCH ATTACHMENT

Cuts up to 3". Spiral tube mixer design optimizes the mixture of fuel and oxygen. Stainless steel tubes and lever. "A" hose fitting, 3/8"-24 thread.
P/N 12-00448

BOTTLES AND TOTE



12-00449 12-00451 12-00452

Plastic Stand, Oxygen and Acetylene Cylinders - Plastic Cylinder Stand holds "MC" Acetylene Cylinder and "R" Oxygen Cylinder.

Plastic Cylinder StandP/N 12-00449

"MC" Acetylene Cylinder (Empty).....P/N 12-00451

"R" Oxygen Cylinder (Empty).....P/N 12-00452



COW HIDE GLOVES

These are a good import, not too stiff.
P/N 12-05155

38" LEATHER WELDING APRON

Quick release buckle and cross straps make it very comfortable; it also has pockets..... P/N 12-05160



3M™ SPEEDGLAS BLAZED WELDING HELMET 100

3M™ Speedglas™ 100 Welding Helmets deliver outstanding protection, comfort and performance with distinctive graphic designs. Welders can benefit from its excellent optical quality and reliable light-to-dark switching at a highly affordable price. The Speedglas 100 welding helmet can be used with most arc welding processes, such as stick (MMA), MIG/MAG and TIG applications greater than 10 amps. It's also the ideal "entry-level" auto-darkening helmet for occasional users, such as hobbyists, farmers and maintenance or construction workers.....P/N 12-02695



FULL FACE SHIELD

Lightweight headgear, shield flips down over prescription glasses. Good over bifocals.
P/N 12-05175



OXY-ACETYLENE HOSE

3/16" hose that may be used with all welding outfits.

B-B FITTING

12'P/N 12-05916

25'P/N 12-05917

A-B FITTING

25'P/N 12-05919



TWO-IN-ONE 'R' GRADE HOSE FOR ACETYLENE

Green Hose: Oxygen. Red Hose: Acetylene. Length: 12-1/2" (3.8m). Diameter: 3/16" (5mm). Weight: 2-1/2 lbs (1.1kg). Use with AW Torch Series. "A" 3/8-24 & "B" 9/16-18 Hose Fittings.....P/N 12-01198

TO

WELDING EQUIPMENT – PARTS CARTS

COBRA STANDARD TORCH KIT



Standard Welding System contains the DHC2000 Welding Torch, #0, #0.5, #1, #2, #3 and Copper Cutting Tip, undercutter, overcutter with guide rail attachment, one set of check valves, a tip cleaner set, wrench, DVD, and instructional manual.
P/N 12-16000



COBRA HENROB WELDING TIP - #0

P/N 12-16011

SMITH WELDING OPTIONAL EQUIPMENT

SERIES 30™ TWO STAGE REGULATORS

H1421A-510 for Acetylene, 0-15 PSI

P/N 12-01186

H1410A-540 for Oxygen, 0-150 PSI

P/N 12-01185

For the professional. Heavy duty, w/check valves.



AC309 AIRLINE™ - STANDARD DUTY CUTTING ATTACHMENTS

Cutting capacity up to 3" thick (76mm) steel. Head Angle 90° USE IN: Torch Handles - AW1A, AW10A....
P/N 12-01082



HUNTSMAN FACE SHIELD - Dark green plastic window 8" x 11-1/2" snaps onto lightweight plastic adjustable headband. Permits full peripheral vision during work. Protects against radiation - flip up visor when not in service.

VisorP/N 8124D

Complete Shield.....P/N 12-05100

HUNTSMAN ELECTRONIC WELDING HELMET

Call for prices and information on the new Huntsman Autoview Welding Filters which provide uncompromising eye protection.



SINGLE STAGE REGULATORS

Gas Used: Oxygen Delivery Pressure: 0-100 PSIG, 0-7 BarP/N 12-19300

Gas Used: Acetylene Delivery Pressure: 0-15 PSIG, 0-1 BarP/N 12-19400



STANDARD DUTY TORCH HANDLE - Inlet connections 3/8" - 24 right and left hand, fit "A" size hose nuts. Cuts up to 3" (76mm), welds up to 1/2" (13mm). Covered by the LIFETIME Warranty & Service Agreement. USED WITH: Cutting Attachment - AC309. Welding Tips - AW200 Series, AW400 Series.
P/N AW1



AW200 AIRLINE™ SERIES OXY-ACETYLENE -

USE IN: Torch Handles - AW1A & AW10A.

For Metal Thickness Up To	Part No.	Price
1/32"	AW201	.
1/2"	AW203	.
1/8"	AW205	.



ONE SINGLE FLINT LIGHTER

P/N 12-01194



TIP CLEANERS

Quality aluminum case with rustproof stainless steel wire. The long spiral cleans a large number of tip styles. A hardened steel file included in each case.
P/N 12-05180



SILVER PENCILS

The best way to mark tubing. Will not corrode tubing and shows up well on greasy tubing. May be used to mark exhaust system without lead cracking
P/N 12-05190

INNOVATIVE PARTS CARTS

Keep parts and pieces from taking off. Cut clutter and down time. Everyone needs one or more - at work or at home, innovative parts carts people become very attached to their parts carts. They're virtually indestructible. Make users more efficient, productive and better organized - plus they're good looking and customizable.



INNOVATIVE PARTS CART A™

- Industry's easiest-nesting /catalog.
- Perfect size for "lighter-hit" jobs.
- Makes a great portable workstation.
- High-carbon, heat-treated steel shelf brackets for years of trouble-free use.
- All shelves have upper side rails to prevent parts slide-off.
- Four industrial grade total-lock caster wheels for mobility; zero movement when locked.
- Durable powder coat finish stays new looking longer.
- Shown with optional Shelf Mat.
- U.S. Patent #7,314,413
- Other Patent Pending.
- Dimensions: 42"W x 31"D x 44"H
- Shelves measure 40"W x 24"D
- Shelves adjust every 3"
- Weight rated to 125 lbs. per shelf
- Includes: 2 adjustable shelves, 2 adjustable support arms, 2 bungee cords, 6 metal hooks
- 73 lbs.P/N 12-02023



INNOVATIVE PARTS CART B™

This best-selling cart features an open design and 30 percent more shelf positions than most carts. It is ideal for major tear-downs and repairs. The cart shelves can be easily adjusted to accommodate various parts. High-carbon, heat-treated brackets support each shelf up to 125 pounds. Multiple parts carts can also be nested and easily stored, saving you space. There's no need to flip or reverse the shelf for nesting multiple units.

- U.S. Patent #7,314,413, 7,708,156 & other Patents Pending
- Dimensions: 41"W - 51"W x 31"D x 75"H
- Shelves measure 40"W x 24"D
- Shelves adjust every 3"
- Weight rated to 125 lbs. per shelf
- Includes: 3 adjustable shelves, 2 adjustable support arms, 2 bungee cords, 6 metal hooks
- 100 lbs. ..P/N 12-02024



INNOVATIVE PARTS CART C™

- Easiest shelves in the industry to adjust.
- Provides 32 sq. ft. of shelf space!
- High-carbon, heat-treated shelf brackets for years of trouble-free use.
- All shelves have upper side rails to prevent parts slide-off.
- Durable powder coat finish stays new-looking longer.
- Shown with optional RO Holder.
- U.S. Patent #7,314,413
- Other Patent Pending.
- 42"W x 50"D x 75"H
- Shelves measure 40"W x 24"D
- Shelves adjust every 3"
- Weight rated to 125 lbs. per shelf
- Includes: 6 adjustable shelves, 4 adjustable support arms, 2 bungee cords, 6 metal hooks
- 152 lbs. ..P/N 12-02025

AIRCRAFT SCALES – TEST EQUIPMENT



PRECISION AIRCRAFT SCALES FOR ACCURATE WEIGHT & BALANCE

Checks aircraft weight and balance after modifications or fitting of new accessories. Flight safety is improved by periodic weighing to verify weight and balance is within limits. Simply roll the aircraft up the ramps onto

the scales or jack the wheels and slide the pads under tires. A single high performance strain gauge load cell is in each pad. Temperature compensation prevents zero shift or sensitivity changes. Weighing pads, indicator and cables are color coded for easy match up. Include one 3 channel indicator, three colored cables, one 110V battery charger cable, three ramps, and six tire stops. Also includes a case.

Part No.	Capacity	Price
12-16711	2,500 lbs. per pad	.
12-16715	6,000 lbs. per pad	.
12-16721	10,000 lbs. per pad	.
12-16725	15,000 lbs. per pad	.

OPTIONS

Part No.	Description	Price
12-16730	Extra cable, colored	.
12-16735	Extra ramps, small, set of 3	.
12-16740	Extra ramps, large, set of 3	.
12-16745	Extra tire stops (chocks)	.

SCALES 4 PLANES



2,000 lb scale measures 11-3/4" x 15-1/4" and is made of cast aluminum. The electronic display has been recessed into the top to keep it out of harms way. Your tire will be positioned parallel to the display to allow the readout to be clearly seen on the outboard side of the tire, or wheel pants. The scale top is powder coated gray. The coating makes

cleanup quite easy because most everything will wipe right off. The units are not water proof. They should never be washed by hose or high pressure, but gentle hand cleaning should be all that is needed.

Model No.	Description	Part No.	Price
AWS-6K-REM	A set of 3-2k with remote display	12-03801	.
AWS-9K-REM	A set of 3-3k with remote display	12-03803	.
AWS-15K-REM	A set of 3-5k with remote display 12" x 16"	12-03805	.

MITTLER BROTHERS AIRCRAFT SCALE SET



• 15 x 15" Cast Aluminum Pads • 1500 Lbs Per Pad Capacity Lbs. or Kg • Reads to 1 Lb. / 1/10% Accurate
• Displays All Information at Once • Zero All Pads at Once or Individually • 40 Hr. Battery Life (rechargeable) **Certification Available At Optional Cost.** Deluxe Aircraft Scales

include custom length cables with Deluxe Stainless Steel connectors and software to calculate center of gravity height. 4500 lbs. Model 50297
P/N 12-02816

WEIGH-SYSTEMS 2K - 3K - 4K CAPACITY STAND ALONE SCALE



This scale can be bought in 2K by .5lb. or 3K by 1lb. or 4K by 1lb. This is a standalone scale that can be powered up by USB-C or an external battery. The scale is powder coated Hammer Tone Gray. Although these units are water resistant, they should never be washed by hose or high pressure. Gentle hand cleaning should be all that is needed to keep your scales looking new. This scale should not be used for aircraft that have dual wheels on one axle. This scale is for single wheel landing gear. The internal display reads out to the nearest .5lb or 1LB depending on capacity. It features an LCD backlight that comes on with motion and stays on for enough time to record your reading accurately. The scale never turns off unless you tell it to. Only the backlite is on a timer and comes back on anytime you cause a little motion. The suitcase unit is powered by an A/C adapter. The scales come certified and currently satisfies all FAA requirements for 12 months.

2K Capacity Stand Alone ScaleP/N 12-06595
3K Capacity Stand Alone ScaleP/N 12-06839
4K Capacity Stand Alone ScaleP/N 12-06840

AEROWEIGH AW-3-150LT LAPTOP / TABLET



Aeroweigh AW-3-150LT Wireless aircraft weighing equipment designed for large turbo props, large corporate jets and commercial airliners. Full wireless operations via laptop/tablet computer, USB antenna, 3ea wireless 50,000 lb top of jack aircraft scales, standard one inch jack mounting, calibrated with OEM NIST traceable calibration, ready to use as received. This is a large aircraft scale, it is intended for use from the Bombardier 600 series, Hawker 800 and up. This scale type is supplied to the OEM aircraft manufactures like Gulfstream, Bombardier, Dassault Falcon and regional airliner use. It is capable of aircraft up to the large single aisle jets.

Features: • Solid stainless steel top of jack load cells, each cell is capable of up to 50,000 lb and reads in a 5 lb count.
• 300ft range or more, operations and read out via the laptop computer which is included, capable of printing a full report, graphics are supported for enriched print outs including company logos.

P/N 12-05422

AEROWEIGH AW-3-30HH HANDHELD WIRELESS AIRCRAFT WEIGHING SYSTEM



Aeroweigh AW-3-30HH Wireless aircraft weighing equipment designed for turbo props and light jets up to 10,000 lbs per jack point, wireless operations via Hand Held Transceiver with built in antenna, 3 each wireless 10,000 lb top of jack aircraft scales, standard one inch jack mounting, calibrated with OEM NIST traceable calibration, ready to use as received. This is a helicopter, small turbo prop and light jet aircraft weighing system. One of the lightest aircraft scales available of any aircraft weighing kits on the market.

Features: • Solid stainless steel top of jack load cells, each cell is capable of up to 10,000 lb and reads in a 1 lb count • 300ft range or more, operations and read out via the hand held transceiver which is about the size of a large cell phone, this is a standard scale system with read out showing total weight with individual channel displays.

P/N 12-05423

AIRCRAFT SCALES M2400-3-10KP WIRELESS AIRCRAFT WEIGHING PLATFORM KIT



Aircraftscales M2400-3-10KP Wireless aircraft weighing platform kit is designed for most aircraft wheel weighing applications in the 10,000 lb per wheel and under category. Full wireless operations via 11.4 inch laptop computer (included) USB antenna, software pre loaded. 3 each wireless 10,000 lb aircraft platform scales, 30 inch long 7 degree aluminum ramps for easy pull up are included, calibrated with OEM NIST traceable calibration, ready to use as received. This is a small to medium aircraft platform weighing scale kit, widely used in small to large FBO operations, a must have for the small shop and 135 operators.

Features: • This kit features full function platform weighing capability for most small to medium aircraft that require to be weighed on platform aircraft weighing systems • Full wireless • No cables • Laptop power is capable of system operations for over 3 hours of use on a single charge.
• Platform batteries are field replaceable and available anywhere in the world.....P/N 12-05424

TO

TIRE BEAD BREAKERS – TIRE GAUGES



TIRE BEAD BREAKER

Once the tire & wheel have been removed from the airplane, the air is let out of the tire. The "Tire Bead Breaker" is used to break the bead or bond between tire and wheel. The "TBB" let you safely break this bead almost without effort & without doing damage to the expensive cast wheels. One broken wheel half can easily cost more than the "Tire Bead Breaker"!

The "Tire Bead Breaker" adjusts to fit tires as small as tailwheel tires and as large as those tires found on large, corporate cabin planes. Can be used on both tube and tubeless tires. P/N 12-16790




TIRE BEAD BREAKING TOOL

Tire Bead Breaking Tool (TBBT-2) Designed for the Homebuilt Aircraft, and GA owners. Unique design leverages the power of the mechanical advantage of the clamp technology used in the Experimental Aero's Deep Reach Dimpling Tool (DRDT-2) and makes breaking your tire bead even easier. Has a significantly lower operating force (2.5 to 4 times). You can even operate the TBBT-2 on your work bench. What this means is you can now break the bead without breaking your back.

P/N 12-06272

BOGERT LARGE BEAD BREAKER 13M-TBB2



Break tire beads safely, with little effort! Originally built to work on dragster tires, this Tire Bead Breaker is capable of working on very small to very large tires. It's extremely adjustable! The Tire Bead Breaker is used to break the bead or bond between the tire and wheel with little effort and without doing damage to the expensive cast wheels.

P/N 12-03577



TIRE BEAD BREAKER

The universal design of this tire bead breaker accommodate tube type and tubeless tires. It is easily adjustable for a wide range of tire sizes up to as large as tires for Twin Beech and Aero Commanders. Features all steel construction.

P/N 13-02360

VALVE CORE REMOVAL TOOL



Boxell Aerospace 968RB Safe Core Valve Tool. Aircraft Tire Valve Core Removal Tool. Used for rapid and safe tire deflation. Tool threads on valve stem. Releases and traps the valve core within the tool but exhausts the air through ports. Prevents Injury to Technician and FOD (stops the valve core from becoming a missile!) Air exhausts away from technician. Fits all standard aircraft tire schrader valves (equivalent to US Automotive valve stem). 100% Lifetime Warranty. Made In the USA.

P/N 12-03428

BERINGER SENSIR TIRE PRESSURE MONITORING SYSTEM



The new Sensair system is connected to a mobile app on your smartphone thanks to pressure and temperature sensors slid over your Beringer rim. Sensors are normally switched off to save the battery (2 to 3 years lifetime) and are activated when the smartphone is detected within a 10ft/3m radius.

Sensair communicates data to the app with a single code per wheel, so there is no risk to measure the data of another tire in the hangar. Low pressure and temperature levels are set by the user on his smartphone, so he can receive a notification.

No need to ramp under your plane to check pressure anymore, thanks to Sensair, you can check your pressure before and during each flight!"

Description	Beringer P/N	Part No.	Price
5" Experimental Use Only	TP-005	06-04226	.
6" Experimental Use Only	TP-006	06-04224	.
5" Certified - For use with STC	TP-005	06-04225	.
6" Certified - For use with STC	TP-006	06-04223	.

ACCUGAGE PROFESSIONAL TIRE GAUGE



This very accurate bourdon tube tire gauge offers precision pressure control and a rugged steel case with rubber shock-absorbing cover. It comes complete with a 12" long flexible braided hose, a bleeder valve, and stop hand. It is easy to read the pressure on this 2" gauge with 1" psi markings and 60 lb. range. Excellent for use on aircraft tires as well as cars and trucks.

P/N 13-00437



ANALOG TIRE GAUGE

Tool Testing Lab's backlit digital gauge reads in PSI, InHg, Oz, Sqn, Inches or Feet, H2O, Kg, sqCm, Kpa, and Bar, with 1/2 tolerance and as fine as 0.1PSI resolution. It also holds peak readings, and features a built-in bleeder valve. Features: 300 PSI gauge, Accuracy 1% Full Scale 300 PSI Rated Hose Rubber Boot, Dual Foot Chick, Swivel Footing on Gauge. 0-160 PSI.

P/N 12-03345



TTL DIGITAL TIRE PRESSURE GAUGE

Ensure a safe flight by checking aircraft tire pressure with an accurate, certified Tool Testing Lab pressure gauge. The TTL Digital Aircraft Tire Gauge has a +/- 0.25% FS accuracy for the most precise jobs. Gauge Size: 3" 1/4 NPT; Gauge Orientation: Inverted. Pressure Range: 0-300 PSI.

P/N 12-05314



TTL ANALOG TIRE PRESSURE GAUGE

TTL Inverted tire pressure gauge with included protective boot is a direct gauge replacement for TTL-300-ATG-I. Pressure Range: 0-300 PSI

P/N 12-05315



TTL DIGITAL AIRCRAFT TIRE MASTER KIT

Ensure a safe flight by checking aircraft tire pressure with an accurate, certified Tool Testing Lab pressure gauge. Along with certification, this Master Kit includes quick connect dual foot chuck, long and short straight chuck, and tire tread depth tool. Range (C): 300 PSI

P/N 12-05316



TTL ANALOG TIRE INFLATOR

This inflator provides accuracy and safety with an over pressure blow-off valve, 1% accurate gauge, bleeder valve, clip-on chuck, and inflation control ball valve Pressure Range: 0-300 PSI.

P/N 12-05317



TTL DIGITAL TIRE INFLATOR

This inflator provides accuracy and safety with an over-pressure blow-off valve, 0.25% accurate gauge, bleeder button, clip-on chuck, and inflation control trigger valve. Pressure Range: 0-300 PSI.

P/N 12-05318



TTL ANALOG AIRCRAFT STRUT GAUGE

TTL analog aircraft strut gauge provides you with the needed accuracy when dealing with strut inflation. This kit includes the necessary strut fitting, soft seat valve, and air bleed valve to get the job done right. Pressure Range: 0-3000 PSI.

P/N 12-05319

MEYER AIRCRAFT JACKS

MEYER HYDRAULICS AIRCRAFT JACKS



Meyers Hydraulics have been recognized as the industry standard for aircraft jacks for over 25 years. Professional mechanics rely on the AJS Jack Set for applications requiring heavy-duty lifting capacity, smooth maneuverability, and reliability. Refer to the Application Chart below for the components required for your aircraft, and then order from the price list accordingly.

Aircraft	Jacks	Tailstand	Legs	Tubes & Caps
Aero Commander	(2) A-6	(1) ATS	(2) AJL	(2) AT-4
Beech: Model 50, King Air, Queen Air	(2) A-6 (1) A-5	---	---	---
Beech: Bonanza, Debonair, Travelaire, Baron	(2) A-5	(1) ATS	---	---
Mooney	(2) A-5	(1) ATS	---	---
Piper: All except Navajo & Aerostar	(2) A-5	(1) ATS	---	---
Piper Navajo & Aerostar	(2) A-6	(1) ATS	---	---
Cessna: Cardinal RG	(2) A-6	(1) ATS	---	(2) AT-4 (2) ATC-8
Cessna: All high wings RGs excc pt Cardinal	(2) A-6	(1) ATS	(2) AJL	(2) AT-4 (2) ATC-8
Cessna: All 300 & 400 Series	(2) A-5	---	---	(2) AT-28 (3) ATC-4
Navion	(2) A-5	(1) ATS	---	(2) AT-28

Part No.	Description	Price
12-21405	A622 W/ AT62222 & JPR1	.
12-21415	ATS Tail Stand	.
12-02281	A427 Jack w/ AT42727 (27"/46")	.
12-21435	AJL Leg	.
12-21440	AT-1 Tube	.
12-21445	AT-2 Tube	.
12-21455	AT-3 Tube	.
12-21460	AT-4 Tube	.
12-21465	AT-28 Tube	.
12-21470	ATC-4 Cap	.
12-21475	ATC-8 Cap	.
12-04981	AJL-ZB 8 Leg	.

AJS	Height Ranges
A-5 w/AT-1*	22"/36"
A-5 w/AT-28	28"/42"
A-5 w/AT-3	34"/58"
A-6 w/AT-2*	34"/58"
A-6 w/AT-4	54"/78"
A-6 w/AJL	Legs+10"
ATC-4 Cap	+1 to 4"
ATC-8 Cap	+1 to 8"
ATS Tailstand	30"/51"

(*) ATC Caps will not work on these tubes.

MEYER TRITASK AIRCRAFT JACK SETS



This has been designed to provide professional technicians with the selection of equipment that best matches their own needs. It has a unique combination of aircraft jacks and accessories to lift the maximum number of different types of airplanes and helicopters weighing up to 8000 lbs. (3629kg) for the least amount of capital investment.

BASIC SET: • 2) A622 Jacks w/AT62222's and AT-JPR1's • 2) A634 Jacks w/AT63434's and AT-JPR1's • 1) AJL-ZB Extension Leg Set (8 legs) • 1) AT-EBZA Extension Bar Set • 2) AT62234 Inner Slide Tubes • 2) AT63448 Inner Slide Tubes • 1) ATS Aircraft Tailstand
P/N 12-04777

DELUXE SET: • 1) A600JS-A TriTask Basic Aircraft Jack Set • 1) A622 Jack w/AT62222 and AT-JPR1 • 1) ALW-10 Leveling Washer Set • 1) AT-EBZB Extension Bar Set • 1) AT62234 Inner Slide Tube
P/N 12-04778

PREMIUM SET: • 1) A600JS-A TriTask Basic Aircraft Jack Set • 2) A627 Jacks w/AT62727's and AT-JPR1's • 1) ALW-10 Leveling Washer Set • 1) AT-EBZB Extension Bar Set • 1) ATS-AA72 Extended Inner Slide Tube
P/N 12-04779

A700 3-LEG SERIES AIRCRAFT JACKS



The heavier piston, turbo-prop and jet powered aircraft weighing up to 32000 lbs. (14517kg) are too valuable to consider using anything less than the A700 Series Aircraft Jacks from Meyer Hydraulics. For over 55 years, Meyer Hydraulics have been manufacturing aircraft jacks that continue to set the standard for safe, dependable lifting at affordable prices. This series of professional hydraulic lifting equipment handles airplanes and helicopters with the security and features one should demand in an aircraft jack.

Meyer Model No.	Old No.	Capacity	Low	High	Lifting Range	Part No.	Price
A722B	-	16,000 lbs	22.5"	36.5"	14"	12-05106	.
A722C	-	24,000 lbs	22.5"	36.5"	14"	12-05217	.
A725B	A-2516	16,000 lbs	25.5"	42.5"	17"	12-02669	.
A725C	-	24,000 lbs	25.5"	42.5"	17"	12-05218	.
A728B	A-9	16,000 lbs	28.5"	48.5"	20"	12-02670	.
A728C	-	24,000 lbs	28.5"	48.5"	20"	12-05219	.
A734B	A-17	16,000 lbs	34.5"	60.5"	26"	12-02672	.
A734C	A-1724	24,000 lbs	34.5"	60.5"	26"	12-02673	.
A740C	-	24,000 lbs	40.5"	71.5"	31"	12-05066	.
A755C	A-5524	24,000 lbs	55.5"	95.5"	40"	12-02677	.
A760A	-	10,000 lbs	60.5"	100.5"	40"	12-05220	.

MEYER AIRCRAFT JACKS



MEYER AIRCRAFT JACK AND EXTENSION LEG

This Series basic design from Meyer Hydraulics has served as the general aviation industry standard for over 55 years. The A600 Series and its predecessors are being used by professional service technicians around the world providing confident lifting of airplanes and helicopters weighing up to 8000 lbs. (3629kg) with the security and features one should demand in an aircraft jack. Even after the additional TriTask features have been added, the A600 Series still continues to be surprisingly affordable.

In the box: • 1 - A634 Jack • 1 - AT-JPRI
P/N 12-04765

MEYER HYDRAULICS EXTENSION BAR SETS

Model No.	Kit Contains	Part No.	Price
AT-EBZA	(2) AT-EB015s; (2) AT-EB035s (2) AT-EB055s; (2) AT-EB075s (2) AT-EB105s; (2) AT-EB125s (not for A755C or A760A)	12-04873	.
AT-EBZB	(2) AT-EB025s; (2) AT-EB045s (2) AT-EB065s; (2) AT-EB085s (2) AT-EB095s; (2) AT-EB115s (not for A755C or A760A)	12-04874	.

Model No.	Description	Part No.	Price
AT-EB015	1.5" (38mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05222	.
AT-EB025	2.5" (64mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05223	.
AT-EB035	3.5" (89mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05224	.
AT-EB045	4.5" (114mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05225	.
AT-EB055	5.5" (140mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05226	.
AT-EB065	6.5" (165mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05227	.
AT-EB075	7.5" (191mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05228	.
AT-EB085	8.5" (216mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05229	.
AT-EB095	9.5" (241mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05230	.
AT-EB105	10.5" (267mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05231	.
AT-EB115	11.5" (292mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05232	.
AT-EB125	12.5" (318mm), for A600 & A700 Series Jacks (not for A755C or A760A)	12-05233	.

MEYER JACKING POINT RECEIVERS



Made of solid steel and powder-coated with a long-lasting yellow finish for easy spotting, these JPR Receivers have been designed to be put into the top of an A600 or A700 Series Aircraft Jack's Inner Slide Tube, an AT-EBnnn Extension Bar or the AT500-CA Conversion Adapter for the A500 Series. The AT-JPR1 is a 1.5" x .187" (38x5mm) pad with a .875" (22mm) round Jacking Point receiving socket. The AT-JPR2 is a little larger with a 1.75" x .375" (44x10mm) pad with a 1.25" (32mm) round receiving socket. Both have a 1" x 1" (25.25mm) round stem.

Model No.	Description	Part No.	Price
AT-JPR1	Meyer Jacking Point Receiver #1	12-05235	.
AT-JPR2	Meyer Jacking Point Receiver #2	12-05236	.



MEYER A500 SERIES LOW AIRCRAFT JACKS

This Series has an ultra-low design that provides maximum single stage stroke while maintaining excellent stability throughout the lifting range. These Aircraft Jacks are ideal for low-slung airplanes and helicopters weighing up to 8000 lbs. (3629kg).

A514 - height range 14"-24"P/N 12-05216
A519 - height range 19"-34"P/N 12-02290
A521 - height range 21"-38"P/N 12-02291

MEYER AIRCRAFT JACK REPLACEMENT SLIDE TUBES



Meyer Hydraulics Aircraft jack Replacement Inner Slide Tubes.

Description	Application	Lift (in)	Part No.	Price
Inner Slide Tube	A427, A62 (Tail Lifting)	28"-47"	12-05234	.
Inner Slide Tube Extension	A419, A421, A519, A521	4"	12-05237	.
Inner Slide Tube	A422	22"-36"	12-21440	.
Inner Slide Tube	A422	28"-42"	12-21465	.
Inner Slide Tube	A422	34"-48"	12-21455	.
Inner Slide Tube	A427	27"-46"	12-05238	.
Inner Slide Tube	A434	54"-78"	12-21445	.
Inner Slide Tube	A434	54"-78"	12-21460	.
Inner Slide Tube Top Conversion Adapter	A419, A421, A500	.875"	12-05239	.
Inner Slide Tube	A622	22.312"-37.312"	12-05240	.
Inner Slide Tube	A622	34.312"-49.312"	12-05241	.
Inner Slide Tube	A627	27.312"-47.312"	12-05242	.
Inner Slide Tube	A634	34.312"-59.312"	12-05243	.
Inner Slide Tube	A634	48.312"-73.312"	12-05244	.
Inner Slide Tube	ATS Aircraft Tailstand	51-72	12-05245	.



MEYER JACK REPAIR KIT

Meyer Hydraulic Jack repair kit for A-5 Jacks (s/n 6417 plus), A-6 Jacks (s/n 5118 plus), A-60 Jacks (s/n 86 plus), A360A, A419, A421, A422, A427, A434. 1 bls (0.5Kg).

Model No.	Application	Part No.	Price
K-150A	A-5 (s/n 1 thru 6416), A-6 (s/n 1 thru 5117), A-10 (s/n 1 thru 51) A-11 (s/n 1 thru 98), A-16 (s/n 1 thru 85), A-60 (s/n 1 thru 85), C-1, C-4, DT-2, F-1, FL-1, JC, JC-ET, JML, LTJ (n/n 1 thru 1531), SSJ, U-11, U-12)	12-05246	.
K-150B	A-5 (s/n 6417 plus), A-6 (s/n 5118 plus), A-60 (s/n 86 plus), A360A, A419, A421, A422, A427, A434, A514, A519, A521, A622, A627, A634, A760A, LTJ (s/n 1532 plus), MAC	12-03246	.
K-175	A-9, A-10 (s/n 52 plus), A-11 (s/n 99 plus), A-12, A-13, A-17, A322B, A325B, A328B, A330B, A334B, A342B, A722B, A725B, A728B, A734B, C-2, F-4, RC-2, SRC, TJC, TTJ	12-05248	.
K-200	A-14, A-15, A334C, A340C, A342C, A355C, A728C, A734C, A740C, A755C, C-6A, P-12, TTJ3	12-05249	.
K-ETJ-2S	ETJ (s/n 2000 plus), EVJ	12-05250	.

AIRCRAFT JACKS

AIRCRAFT JACKING SOLUTIONS FLAT GEAR SYSTEM TAILWHEEL



This simple, safe, and efficient design allows for quick servicing or repair of aircraft wheel assemblies and main gear security. The new design allows tailwheel aircraft to be raised by the landing gear with lift pads placed at the upper portion of the gear lags. The latter allows both wheels to be lifted together creating a stable much safer working environment. Built-in safety stops prevent unplanned lowering of the jack.

Compatible: • All Cessna Tail Wheel Aircraft • C120 through C185
P/N 12-05611

AIRCRAFT JACKING SOLUTIONS BELLY PAD SYSTEM TAILWHEEL



This simple, safe, and efficient design allows for quick servicing or repair of aircraft wheel assemblies and main gear security. The cushioned Belly Pad lifting option allows aircraft to be lifted from below the gearbox bulkheads. Lifting the aircraft from below allows the mechanic to inspect the security of the upper gear at the gearbox and to investigate any play or movement.

Compatible: • All Cessna Tail Wheel Aircraft • C120 through C185 • Works on both flat and round landing gear Aircraft. P/N 12-05613

AIRCRAFT JACKING SOLUTIONS BELLY PAD SYSTEM NOSE GEAR



This simple, safe, and efficient design allows for quick servicing or repair of aircraft wheel assemblies and main gear security. The cushioned Belly Pad lifting option allows aircraft to be lifted from below the gearbox bulkheads. Lifting the aircraft from below allows the mechanic to inspect the security of the upper gear at the gearbox and to investigate any play or movement. **Compatible:** • All known Nose Wheel Cessna, Sling & others • Except C150. P/N 12-05612

AIRCRAFT JACKING SOLUTIONS FLAT GEAR SYSTEM NOSE GEAR



This simple, safe, and efficient design allows for quick servicing or repair of aircraft wheel assemblies and main gear security. The new design allows nose gear aircraft to be raised by the landing gear with lift pads placed at the upper portion of the gear lags. The latter allows both wheels to be lifted together creating a stable much safer working environment. Built-in safety stops prevent unplanned lowering of the jack. **Compatible:** • All known Nose Wheel Cessna, Sling & others • Except C150. P/N 12-05610

4 CHARLIE BRAVO FORK KING 5

Aircraft nose wheel jack for 5.00 X 5 nose wheel with 6 inch spacing between forks. Please note: The Fork King Jack is not recommended for use with nosewheel fairings.

P/N 12-06649

4 CHARLIE BRAVO FORK KING 6

Aircraft nose wheel jack for 6.00 X 6 nose wheel with 7 inch spacing between forks. Please note: The Fork King Jack is not recommended for use with nosewheel fairings.

P/N 12-06649

BOGERT AERO JACK KIT



The Aero Jack System saves time when changing tires or working on landing gear. Use a combination of innovative tools packed in a handy toolbox. Designed by an A&P, for do-it-yourselfers and other mechanics, three kits are available depending on your needs.

Description	Part No.	Price
30M-AJC - Complete Aero Jack System - Service both flat and round gear from a handy toolbox.	12-00254	.
30M-AJF - Flat Gear Aero Jack Kit - Cessna C-120, 140, 150, 170, 172, 175, 188, 182, 190, 195, 205, 206, 336, 337, flat gear 177RG, Piper Tomahawk, Beech Skipper, Champion, Bellanca, and similar landing gear.	12-00681	.
30M-AJR - Round Gear Aero Jack Kit - Cessna C-172RG, 177RG, 182RG, 210, T210, P210, and similar landing gear.	12-00682	.
30M-AJE - Expandable Aero Jack System - Included in the tool box is: Bogert Tribal Jack with all the jack pads. (C210, RG, R, FPP, Moon, Musk, C300). Weight is 30 lbs.	12-02096	.

TRIBAL JACK



Aid aircraft maintenance, such as servicing brakes, working on bearings, or changing tires. Maximum load of 2,500 pounds and can be used on Piper aircraft, Musketeer, Mooney, and many more aircraft with near-vertical landing gear. Lower clearance lifting pad which allows jack owners to begin lifting from a 2 1/2" starting position and up to 12". It can be used on main gear, nose gear and the tail wheel. Made in USA.
Tribal Jack.....P/N 12-00838
Tribal Jack Pads.....P/N 12-03536

TO

AIRCRAFT JACKS

BOGERT WING JACK PADS



Jack Pads attach to wing jack points. Follow aircraft service manual instructions for jacking. Cessna 210, 177RG

P/N 12-03533	
Cessna 172RG, 182RG	
P/N 12-03532	
Beech Musketeer, Sundowner	
P/N 12-03535	
Mooney M20 Series	
P/N 12-03534	

BOGERT JACK PADS

Jack pads provide a cradle for the main landing gear legs. The cradle design securely holds the landing gear providing a safe jack point. The adjustable jack pad fits flat spring gear. The round gear jack pad fits the models listed below. • Save time when servicing tires, wheel bearings and brakes • Lift only the wheel instead of the whole aircraft • Eliminate the unsafe practice of stacking wood blocks under a bottle jack • All parts pack away neatly into a sturdy weather resistant toolbox • Made in USA



FLAT PIVOT POINT ADJUSTABLE JACK PAD

- Adjust width, taper and angle adjustment
- Adapts to many jacks. Shown with bottle jack
- Fits: Cessna C-120, 140, 150, 170, 172, 175, 180, 185, 182, 188, 190, 195, 205, 206, 336, 337, flat gear 177RG, Piper Tomahawk, Beech Skipper, Champion, Bellanca, and similar spring steel landing gear.

P/N 12-00837



ROUND JACK PAD ADJ-R

Jack pads provide a cradle for the main landing gear legs. The ADJ-R has a half round design cradles the landing gear safely. Pivots on a machined bottle jack extension. Use with Cessna C-172RG, 177RG, 182RG, 210, T210, P210, and similar landing gear.

P/N 12-00679

ARRIGETCH DESIGN PILATUS PC12 JACK ADAPTER AD-PJA-01



The Jack Adapter allows 1 main wheel to be jacked up efficiently for quick tire changes at remote runways or at your home base. Works with commonly available floor jacks

and bottle jacks (contact us if you need jack recommendations or an adapter for your bottle jack). You know that tire blowouts happen at the most unexpected time when you're furthest from support and there are no fancy wing jacks to be found. Be prepared; keep a jack adapter in every PC-12. The Jack Adapter is constructed of machined steel with a powder-coated finish.

P/N 12-06837



C300 JACK PAD ADJ-300

- Cessna 300, 400 & 500 series • Perfect for the Conquest • Citation • Sold in Singles.

P/N 12-00683

BOGERT JACK EXTENSIONS



- Bottle Jack Extensions will fit any 1-1/4" O.D. ram • Typical 6 ton jack has a 1-1/4" O.D. ram.
- Extensions are machined & slide together for easy stacking • Use on aircraft with a jack point pin • Not the same extensions as found in the Aero Jack Kit below • No special jack pad needed on tubular C-152, 172, 182 etc.

1.5" extension.....P/N 12-00156

3" extension.....P/N 12-00157

8" extension.....P/N 12-00158



AUTO JACK ADAPTER

P/N 05-08297

BOGERT AVIATION CIRRUS SR20 / SR22 JACK PAD



This jack pad is designed to thread into the wing jack points for use with wing jacks. Each pad can be used with an aviation wing jack that is made to accept a jack point.

P/N 12-05118

BOGERT CESSNA 337 JACK PAD



This jack pad is designed to thread into the wing jack points for use with wing jacks. Each pad can be used with an aviation wing jack that is made to accept a jack point.

P/N 12-05119

BOGERT BEECHCRAFT B35/58 JACK PAD COMBO



Forget dragging out a full set of wing jacks to do routine maintenance. The 30M-B35/B58 Jack Pad for all Beech Bonanza and Beech Baron aircraft makes maintenance on wheels, brakes, tires and wheel bearings simple and fast. You can do the work just about anywhere. Use the jack adapter and axle pin with any 4-6 ton hydraulic bottle jack to raise main gear and nose gear to fix a flat or do normal preventative maintenance. The system is small and light enough to carry on board so you have the tools you need. **Features:** • Works for Main and Nose Gear • Saves time and money • Adds mission capability • This jack adapter and pin can be used to pick up a flat tire to tire changing height • Frees up full service and wing jacks for other workP/N 12-05120

BOGERT BEECHCRAFT B35/58 JACK PAD KIT WITH JACK



Forget dragging out a full set of wing jacks to do routine maintenance. The 30M-B35/B58 Jack Pad for all Beech Bonanza and Beech Baron aircraft makes maintenance on wheels, brakes, tires and wheel bearings simple and fast. You can do the work just about anywhere. Use the jack adapter, axle pin and included Safe Jack 6 ton hydraulic bottle jack to raise main gear and nose gear to fix a flat or do normal preventative maintenance. The system is small and light enough to carry on board so you have the tools you need.P/N 12-05121

BOGERT CESSNA 340 / 401/ 402 / 4011 / 414 JACK KIT



Forget dragging out a full set of wing jacks to do routine maintenance. The 30M-402-k Jack Kit for all Cessna 340, 401, 402, 411, 414 and 421 aircraft makes maintenance on tires, brakes, and wheel bearings simple and fast. You can do the work just about anywhere. Use the jack pad and hydraulic jack to raise main gear to fix a flat or do normal preventative maintenance.

The system is small and light enough to carry on board so you have the tools you need. **Features:** • Works for Main Gear • Saves time and money • Adds mission capability • This jack pad and hydraulic jack can be used to pick up a flat tire to tire changing height • Frees up full service and wing jacks for other work • Frees up hanger space.

P/N 12-05129

BOGERT VANS RV JACK PAD



You asked for them and here they are. This jack pad is designed to thread into the wing tie down holes for use with wing jacks. Pad can be used with an aviation wing jack that is made to accept a jack point or you can use the supplied adapter on homemade wing jack that are popular with home built owners. Pad is sold individually with a jack adapter.

Specifications: • Fits RV aircraft that have a threaded tie down rings with 3/8-16 threads • Fits RV aircraft that have a threaded tie down rings with 3/8-16 threads • Sold as singles • Made in USA • Pad has 3/8-16 internal threads and grade 10 set screw threads • Pad is 2 inches in diameter • Rubber padded • 3/4" Ball jack point • Jack ram adapter fits jack rams up to 1.25 inch diameter • Jack ram adapter is machined steel. Sold as singles • Made in USA • Pad has 3/8-16 internal threads and grade 10 set screw threads • Pad is 2 inches in diameter • Rubber padded • 3/4" Ball jack point • Jack ram adapter fits jack rams up to 1.25 inch diameter • Jack ram adapter is machined steel.

P/N 12-05132

AIRCRAFT JACKS

BROWNELL AVIATION JACKS



enthusiasts in order to help make the work place safer and more efficient. All of the products are made in America using skilled American labor and American steel.

- Precision acme threads for easy, smooth adjustment
- Very stable work or storage platform
- Stays in place with no bleeding, etc.
- Small footprint of base and top pad allow for easy access
- Stands stack neatly when not in use to free up valuable space
- TPE surface resists slipping and scratching
- SWL 20,000lbs/9,100kgs

Description	Height Mins (in/cm)	Weight (lb/kg)	Part No.	Price
AS3 w/top	25-38 / 64-97	97 / 15.0	12-03299	.
AS2 w/top	29-46 / 74-117	37 / 16.5	12-03301	.
AS1 w/top	33-50 / 84-127	38 / 17.0	12-03302	.
AS0 w/top	41-58 / 104-147	46 / 21.0	12-03303	.
AS0X w/top	54-72 / 137-183	46 / 22.5	12-03304	.
AS0XX w/top	67-84 / 170-213	50 / 43.0	12-03305	.



BROWNELL AVIATION TAIL STAND

- Precision acme threads for easy, smooth adjustment
- Very stable work or storage platform
- Stays in place with no bleeding, etc.
- Small footprint of base and top pad allow for easy access
- Stands stack neatly when not in use to free up valuable space
- TPE surface resists slipping and scratching
- SWL 20,000lbs/9,100kgs
- 30-52"/76-131cm range
- Universal connection
- Base plate
- Accommodates ballast ..P/N 12-03306



RV JACK STAND KIT

Someday you'll need to jack up your aircraft to install new tires, clean & grease wheel bearings, or fix a flat. This nifty jack stand is safer than using an engine hoist or the wing tie down location. Requires a modification to the axle nuts (about 1 hour). Kit includes the axle jack arm, axle nut modification hardware, & directions to modify the nuts. For hollow axles (Wittman style) Gear only. Uses automotive bottle jack. Jack not included. Not for RV-8s. For RV Gear Legs with Hole in Axle. P/N 12-00634

RV 8 TRAVEL JACK



The RV 8 Travel Jack was designed and manufactured by RV-8 builder / pilot Steve Jackson. All steel construction, weighs less than 3 pounds. Jack must easily removes from base plate for compact storage. Uses 3/4" wrench to operate (wrench not included). Tested to 1350 pounds. Has securing arm that positions between the gear leg & brake to stabilize the jack - works on both left and right gear leg with a simple adjustment. Base measures 3-1/2" X 8"; mast stands 10" tall. Designed for RV-8 flat spring gear legs (only -- will not work on the other RVs with round gear legs).

Standard.....P/N 12-03170

For Grove GearP/N 12-03243



QUALITY JACK POINTS

Quality Jack Points. (Very high quality jack points for most aircraft wing installations and jacks). These very small, lightweight (less than two oz.) aircraft grade aluminum Jack Points can make jacking your aircraft a simple and safe task. These Jack Points incorporate a grade eight 3/8"X 16 plated stud that fits the wing thread that can't fail causing damage. The heat-treated, aircraft grade aluminum body, is de-burred, and tumbled to eliminate sharp edges and includes an attached nylon spacer to protect the wing skins painted surfaces. These parts are small and light weight so you may want to carry them in your plane should you find the need for them away from home. Sold as a pair.....P/N 05-12379

BEECHCRAFT B90 JACK PAD



The pad is available without the remote bottle jack. The 30M-B90 Jack Pad is great for raising one wheel for a tire change, repacking wheel bearings or servicing the brakes. When used with a long stroke jack, the jack pad may be used to change a flat tire. Small and light enough to carry on board, the jack pad adds mission capability when operating from airports that do not have full service or wing jacks large enough to lift these aircraft.

Features:

- Small, Portable and light weight compared to wing jacks
- Should be used with Bogert hydraulic, 12", 15 ton long stroke bottle jack
- The jack pad can be used with 6 ton, 1 1/4" ram or larger bottle jacks
- Can be used with 3 ton or larger floor jacks.
- Made in the USA

Jack Pad Only.....P/N 12-03165

Jack, Pad, and Pump Kit.....P/N 12-03184

ALPHA AVIATION 3 TON PRO-LINE JACK

MODEL #368W



The ULTIMATE in versatile general aviation aviation jacks. When the need is for a versatile jack that can accommodate the needs of a busy FBO, the Model #368W is the choice. The Model #368W combines all the versatility of Model #838W with the necessary fittings to accommodate high wing Cessna aircraft such as 172RG, 177RG, 210. (Models 182RG and 337, see 868HLW), but in a 3 Ton version. Shipped with adapters, the unique design allows the Model #368W to easily convert from a 26" low wing jack through the 32" and 38" levels to a double-braced 62" or 68" high wing jack, avoiding the high cost of having to purchase model specific jacks.

Note: NOT RECOMMENDED FOR: Beech Model 99, Beech 1900, Citation Series, Cheyenne I/II/III/IV, Conquest King Air, Navajo, Pilatus, Queenaire, T28 due to untested side-load situations

P/N 05-22912

LANDING GEAR SAFETY STAND



The stand slips on over the axle when ever the wheel is removed. Put the nut back on and the plane can't slip off the stand. It adjusts for height with a quick release pin. The wide, stable "H" base is made from heavy gauge square steel tubing for strength, safety and durability. The unique stand is finished in an attractive, bright red powder coat finish. LGSS-2, has a 12" x 12" base with adjustable axle height of 10"-15", and LGSS-3 has an 18" x 18" base with adjustable height of 14"-21.5".

9" Stand.....P/N 12-02015

12" Stand.....P/N 12-00255

18" Stand.....P/N 12-00256



PROP SLING, (BOGI-LIFT)

The tool every mechanic needs!

- Lift nose wheel without jacking up whole plane
- Service nose wheel & strut effortlessly
- Support a new propeller during installation
- Use with 2 and 3 blade props
- 4-point stability with tail & wing jacks
- Made in the USA.

P/N 12-16718

TO

ALPHA AVIATION AIRCRAFT JACKS

THREE TON HYDRAULIC AIRCRAFT JACKS



MODEL #324W TON LOW WING JACK

Eliminates the frustration of having unstable jacks that conflict with landing gear components and gear doors adjacent to your jack point. These jacks are especially appreciated by owners of Bonanza, Mooney, Comanche, & Twin Comanche Aircraft for the manner in which they may be positioned clear of the inner gear door hinge. Model #324 provides an easy slide under fit on aircraft with lower jack points. • Double action 3 ton (6,000lbs) hydraulic cylinder • Jack point centering cap • Locking safety

collar secures the load • Rugged heavy gauge steel construction • Stable three leg design clears gear doors • Convenient handle storage. Effective Range: 24"-40" Ram Capacity: 6000lbsP/N 12-01724



MODEL #326W TON LOW WING JACK

26" - 43" Eliminates the frustration of having unstable jacks that conflict with landing gear components and gear doors adjacent to your jack point. Owners of Beechcraft Bonanza 33/35/36 aircraft especially appreciate these jacks for the manner in which they may be positioned clear of the inner gear door hinge. If the only plane you'll be lifting is the Bonanza please see Model #324. • Jack point centering cap to assure the aircraft stays on the jack • Double action 3 ton (6,000

lb) hydraulic cylinder • Locking safety collar secures the load • Rugged heavy gauge steel construction • Three leg design clears gear doors • Convenient handle storage. Effective Range: 26"-43" Ram Capacity: 6000lbsP/N 13-05544



MODEL #332W TON LOW WING JACK

26" - 43" & 32" - 49" Especially suited for use on Cessna 310/320 Aircraft. Supplied with a removable 6" riser to accommodate the higher jack points found on some aircrafts. Similar in design to Model #326, this unique design allows the Model #332 to be easily converted for use as a Model #326 by removing the 6" riser. Owners report this versatility to be of great benefit when aircraft of various types are housed together or the jacks are loaned out to others • Double action 3 ton (6,000 lb) hydraulic cylinder

• Jack point centering cap to assure the aircraft stays on the jack • 6" riser provided to accommodate higher jack points. Effective range 26" - 43" & 32" - 49" • Locking safety collar secures the load • Rugged heavy gauge steel construction • Three leg design clears gear doors • Convenient handle storage. Effective Range: 26"-43" & 32" - 49" Ram Capacity: 6000lbsP/N 12-01725



WHEEL KIT FOR HYDRAULIC AIRCRAFT JACKS

Add Wheels to our Model #324, #326 or #332 The base that comes standard with all of our aircraft jack models is pre-drilled to easily allow for the addition of a Wheel Kit. **This Kit Includes:** 1 Left Bracket, 1 Right Bracket, 2 Wheels, Hardware Packet, Installation Instructions

P/N 12-02032

ALPHA AVIATION PORTABLE TAILWEIGHT POST 535

The unique design allows the secure anchoring of compression or torsion loads without the need of numerous sand bags and anchor chains. A safer and much more professional approach to securing the tail of an aircraft undergoing maintenance. Shipped knock down, the portable tail weight/tail post is easily assembled and weighted using solid concrete blocks obtained locally.

P/N 12-05486



EIGHT TON HYDRAULIC AIRCRAFT JACKS



MODEL #838W 8 TON UNIVERSAL JACK

26"-43", 32"-49", 38"-55"

Model #838W provides all the strength and versatility needed to accommodate larger aircraft. This unique design allows the Model #838W to easily convert from a 26" low wing jack to a 32" or 38" jack, avoiding the high cost of having to purchase model specific jacks. Now with "Tilt & Go" wheels and convenient handle storage for greater value • Double Action 8 Ton (16,000lb) Hydraulic Cylinder • Highly Versatile- Shipped With Adapter For 26" 32" & 38" Heights • Jack Point Centering Cap To Assure The Aircraft Stays On The Jack • Locking Safety Collar Secures The Load • Stabridged Heavy Gauge Steel Construction • Three Leg Design Clears Gear Doors • "Tilt & Go" Wheels For Greater Mobility • Convenient Handle Storage Height Range 26"-43", 32"-49" & 38"-55"

Ram Capacity: 16,000 lbsP/N 12-01726

The Model 838HLW combines the strength and versatility of our Model 838W jack with the ability to provide a full 6" of additional ram travel. Ram travel that translates into additional ground clearance, working room and reduced set up timeP/N 12-03328



MODEL #868W 8 TON UNIVERSAL JACK

The Model #868W combines all the strength and versatility of Model #838W with the necessary fittings to accommodate High Wing Cessna Aircraft such as 172RG, 177RG, 210 and 337. Shipped with adapters, our unique design allows the Model #868W to easily convert from a 26" low wing jack through the 32" and 38" levels to a 68" high wing jack, avoiding the high cost of having to purchase model specific jacks • Double Action 8 Ton (16,000 Lbs.) Hydraulic Cylinder • Highly Versatile- Shipped With Adapters For 26", 32", 38", & 68" Heights • Double Braced At The 68" Height For Stability • Jack Point Centering Cap To Assure The Aircraft Stays On The Jack • Locking Safety Collar Secures The Load • Rugged Heavy Gauge Steel Construction • Stable Three Leg Design Clears Gear Doors • Tilt & Go Wheels For Greater Mobility • Convenient Handle Storage Height Range: 26"-43", 32"-49", 38"-55", 68"-87"

Ram Capacity: 16,000 lbs

P/N 12-01727

NOT RECOMMENDED FOR Beech Model 99, Beech 1900, Citation Series, Cheyenne I/II/III/IV, Conquest, King Air, Navajo, Pilatus, Queenaire, T28.....P/N 12-03287

ALPHA AVIATION JACK SEAL KITS



3 Ton Jack Seal Kit for Alpha Aviation Aircraft Jack Models #324W (324) / #326W (326) / #332W (332) with 1-1/4" diameter ram only.

P/N 05-22907

8 Ton Jack Seal Kit for Alpha Aviation Aircraft Jack Models #838W, 868W, 838HLW or 868HLW with 1-1/4" diameter ram only.

P/N 05-22908

TAILWEIGHT EXTENSION FOR TAILWEIGHT POST



Adds on an additional 13 inches to the Tailweight Post model 375. For higher wing aircraftP/N 12-02033

ALPHA AVIATION TAILWEIGHT EXTENSION - 24 INCH



Alpha Aviation Tailweight Extension 24 Inch for Jacks.

P/N 05-22910

SAFETY EQUIPMENT



WORX DISPOSABLE 6ML LATEX GLOVES

T6mL Powder Free, textured Latex industrial Gloves 100pcs. 240mm 9" cuff Excellent dexterity, form fit. (Not recommended for harsh chemicals)

Medium.....P/N 01-01802
Large.....P/N 01-01803
X-Large.....P/N 01-01804



WORX ORANGE NITRILE GLOVES 7.5ML THICK

T6mL Powder Free, textured Latex industrial Gloves 100pcs. 240mm 9" cuff Excellent dexterity, form fit. (Not recommended for harsh chemicals)

Medium.....P/N 01-01808
Large.....P/N 01-01809
X-Large.....P/N 01-01810

WORX 8ML BLACK NITRILE DISPOSABLE GLOVE WITH 10 INCH CUFF



8 mil thick black nitrile disposable gloves with 10-inch cuff!

These gloves are designed for high-risk applications where your protection and safety are a MUST!

Features: • Powder free • Single Use • Store Under Cool, Dry Conditions • Avoid direct sunlight

Medium.....P/N 01-01811
Large.....P/N 01-01812
X-Large.....P/N 01-01813



WORX BLUE NEOPRENE OVER YELLOW LATEX 13 INCH - 28ML

28mil Blue Neoprene Chemical Resistant over Latex 13" Flock lined.

Medium.....P/N 01-01814
Large.....P/N 01-01815
X-Large.....P/N 01-01816

WORX GREEN NITRILE 13 INCH GLOVE



15mil Green Nitrile 13" Length Flocklined. Features: • 13" length • Thickness: 15 mil • Puncture and abrasion resistant • Tough against chemicals, solvents, hazardous liquids, PVC cements or standing water • Use during chemical processing, oil refining and handling petrochemicals • Textured for superior grip on wet or slippery material

Medium.....P/N 01-01817
Large.....P/N 01-01818
X-Large.....P/N 01-01819



WORX GREY STRING KNIT ELASTIC WRIST GLOVE

Worx Grey String Knit Elastic Wrist Glove.

Medium.....P/N 01-01820
Large.....P/N 01-01821
X-Large.....P/N 01-01822



WORX 4ML NITRILE POWDER FREE DISPOSABLE GLOVES - 100 PACK

These gloves get the job done in automotive, industrial, janitorial, food service, sanitation, and safety uses, premium, industrial-grade nitrile glove is an awesome combination of strength, comfort, and dexterity.

Medium.....P/N 01-01799
Large.....P/N 01-01800
X-Large.....P/N 01-01801



WORX ORANGE KNIT HONEYCOMB WITH PVC COATING

Worx Orange Knit Honeycomb with PVC Coating.

Medium.....P/N 01-01836
Large.....P/N 01-01837
X-Large.....P/N 01-01838



WORX GREY NYLON SHELL WITH POLYURETHANE COATING

Worx Grey Nylon Shell with Polyurethane Coating.

Medium.....P/N 01-01833
Large.....P/N 01-01834
X-Large.....P/N 01-01835



WORX THERMO LINED SPLIT COWHIDE GLOVE / SAFETY CUFF

Worx Thermo Lined Split Cowhide Glove / Safety Cuff.

Medium.....P/N 01-01830
Large.....P/N 01-01831
X-Large.....P/N 01-01832



WORX CUT RESISTANT & KEVLAR GLOVE

Cut 5-H power shell with Foam NBR Palm Coated Grey.

Medium.....P/N 01-01827
Large.....P/N 01-01828
X-Large.....P/N 01-01829

WORX JUMBO BUCKET - 5MIL BLACK POWDER FREE NITRILE - 1000 PIECE



No. 1 selling Disposable Nitrile glove, Limit 24 Buckets per customer (month). Black Nitrile 6mil thick powder free Jumbo Pail 1000 gloves. Great for Job sites and mobile service fleet Vehicles. Packaged in a 5 gal reusable Bucket with airtight Lid & handle, keeps gloves Clean and Dry, Great for Job Site & Mobil Crews.

Large.....P/N 01-01823
X-Large.....P/N 01-01824

TO

SAFETY EQUIPMENT



3M™ SAFETY GOGGLE BX™

• BX protective eyewear are fully adjustable with three lens angles and adjustable nose bridge and temple length. Silver/Black frames.

Features: • Soft adjustable nose bridge

- Three lens angles for cozy fit • Integrated sideshields • Protect your eyes from impact and block 99.9% UV rays • Polycarbonate anti-fog lens • Meets the requirements of CSA Z94.3-2007 and the High Impact Requirements of ANSI Z87.1-2003P/N 09-02154

VIRTUA™ PROTECTIVE EYEWEAR AP



The Virtua protective eyewear line merges outstanding unisex style, protection and affordability, all while offering wearers an open, unobstructed viewing range and impact-resistant, 3-piece polycarbonate construction. Designed for

indoor or outdoor use.

- Clear, anti-fog lens
- Clear frame
- Weighs less than one ounce
- Polycarbonate lens absorbs 99.9% UV

Clear Anti-Fog Lens.....P/N 09-03053

Gray Hard Coat Lens.....P/N 09-03055

Light Blue Hard Coat Lens.....P/N 09-03056

Clear Hard Coat Lens.....P/N 09-03059



OPTICOR™ SAFETY GLASSES

Meets ANSI Z87.1+ (High Impact) and CSA Z94.3 Standards. Sizes : One Size Fits Most Frameless. Black Nylon Temples. Polycarbonate Lens. CASC (Cordova Anti-Scratch Coating). Thermo-Plastic Temples and Nose Piece.

ClearP/N 14-02170



SAFETY FACE SHIELD REPLACEMENT

Provides protection for the face and neck against chemical splash and flying particles.

Replace. Window, Clear

P/N 90030

3M™ SECUREFIT™ PROTECTIVE CLEAR EYEWEAR



These glasses come with important safety features for overall eye protection, including impact resistant polycarbonate lenses that absorb 99.9% UVA and UVB rays up to 380 nm. The glasses also meet the requirements of CSA Z94.3-2007 and ANSI Z87.1-2010. This protective eyewear weighs less than one ounce for lightweight comfort.

Color	Part No.	Price
Clear	09-04759	.
Gray	09-04760	.
Amber	09-04761	.
AntiScratch Gray	09-04763	.
Anti-Fog Clear	09-04764	.
Anti-Fog Gray	09-04765	.



SCARAB™ SAND BLAST HOODS

Features durable construction and large size to cover the head, face, neck and shoulders to protect against the impact of high velocity abrasives. Made with super-heavy 10.38 oz. army duck canvas treated with high water repellant and mildew resistance. Complete with an ERB Safety built-in construction type hard hat that meets ANSI Z89.1-2003 (Type 1, Class E, G & C) and complies with OSHA regulations for industrial head protection.

Scarab Sand Blast Hood.....P/N 12-01665

Scarab Lite Sand Blast Hood.....P/N 12-01666

ACCESSORIES

Lens for Scarab Blast Hood.....P/N 12-01667

Screen for Scarab Blast Hood.....P/N 12-01668

UVEX™ BIONIC FACE SHIELD



- Honeywell Uvex™ Bionic™ Face Shields
- Shell offers built-in chin protection and extended top-of-head coverage
- Highly adjustable headgear tilts visor nearer or farther from face depending on preference and application
- Comfortable cell foam on back of headgear
- Breathable, removable, washable headband
- Comfortably worn with most goggles and respirators

Testing and Approvals:

Passes ANSI Z87+ and CSA Z94.3 Standards

P/N 12-05261

3M™ PELTOR™ PERSONAL HEARING PROTECTORS



OPTIME 105

Over-the-head dual cup. NRR 30. Can be used for noise levels up to 105 dB. **Color:** Black and Red

P/N 12-00699



OPTIME 105 HI-VIZ

NRR 30. Can be used for noise levels up to 105 dB. Bright Hi-Viz Yellow great for recognition of workers.

P/N 12-02568



OPTIME 101 - Over-the-head Hp. NRR 27. Can be used for noise levels up to 101 dB. **Color:** Green.

P/N 12-16110



OPTIME 98 - Over-the-head Hp. NRR 25. Can be used for noise levels up to 98 dB. **Color:** Yellow and Black.

P/N 12-02569



OPTIME 95 - Folding hearing protector. NRR 21. Can be used for noise levels up to 95 dB. Folding – Slim design. **Color:** Beige and Black.....P/N 12-02570

3M™ E-A-R™ EARPLUGS



E-A-R CLASSIC

Most popular earplug in the world • NRR 29dB • The E-A-R® Yellow color is your assurance of proven protection • Moisture resistant dermatologically safe foam is not irritating • Slow recovery PVC foam provides comfort with low pressureP/N 9134

with CordP/N 09-02148



CLASSIC™ PLUS

Classic Plus are longer than Classic earplugs to fit deeper into the ear canal and provide a higher level of protection. • Slow-recovery foam helps ensure comfort and minimize pressure • Bright yellow color provides a quick visual compliance check • Dermatologically safe foam is non-irritating, non flammable, and moisture-resistant

P/N 09-02149

with CordP/N 09-02150



E-A-R SOFT™ YELLOW NEONS™

NRR 33dB-Highest NRR available • THE WORLD'S SOFTEST EARPLUGS • Self-adjusting foam provides low pressure with excellent attenuation • Exciting designs and brilliant colors • Dermatologically safe foam is non-irritating to the skin

P/N 09-02151

with CordP/N 09-02152



3M™ PISTONZ™ EARPLUGS

No need to roll down. Biaxially-stiff stem for easy insertion, yet designed to flex sideways if impacted. Tips look like metal, yet provides ultra-soft feel for all day wear.

without CordP/N 12-02571

with CordP/N 12-02572



E-A-R EARBUDS 2600 HEADPHONES -

• NRR 26dB • Noise Limited to 82dB • Convenient, Easy-Access Volume Control • Mp3 Compatible • Blocks out External Noise • Hear Your music while you work • Ultra Comfortable Design • Better fit for longer wear.....P/N 09-02153

SAFETY EQUIPMENT – PROTECTIVE COVERALLS



3M™ HARD HAT

Protective White hard hat with comfortable 4-point ratchet suspension and standard brow pad. Meets requirements of ANSI/ISEA Z89.1-2014 Type 1, Class G and E. 4-point ratchet suspension allows wearer to customize height and fit. Suspension sits lower on head to reduce pressure and increase security. Short brim enhances better upward visibility. Slots allow for attachment of safety accessories. Replaceable brow pad enhances comfort and extends life. Meets requirements of ANSI/ISEA Z89.1-2014 Type 1, Class G and E. ANSI/ISEA compliant when worn in the forward and reverse donning positionsP/N 09-04766.....

KEVLAR™ HEAT SLEEVE

14" length of 100% Kevlar. Improved comfort and protection against cuts and abrasions. Heat resistant. May be worn with gloves. Washable and reversible.

P/N 01-01548.....



3M™ DISPOSABLE PROTECTIVE COVERALL 4530

Features: Breathable material to help reduce heat buildup and promote comfortable wear. Knit cuffs with elasticized waist and ankles for increased comfort and freedom of movement. Three panel hood design for compatibility with complementary PPE. Two-way zipper with sealable storm flap. Reinforced gusset for increased durability. Flame

resistant treatment offering secondary protection against heat and flames. Anti-static coating on both sides.

L.....P/N 12-02663..... XL.....P/N 12-02664.....
2XL.....P/N 12-02665..... 3XL.....P/N 12-02666.....
4XL.....P/N 12-02667.....



3M™ DISPOSABLE PROTECTIVE COVERALL 4520

The 3M disposable protective coverall 4520 key features include: Breathable material (SMMMS) to help reduce heat stress and comfortable wear. Elasticated waist, ankles, and wrists for convenience and freedom of movement. Three panel hood design for compatibility with complimentary PPE. Two-way zipper with storm flap for convenience and to help provide additional

protection. Anti-static coating on both sides. Protect against light liquid splashes and hazardous dusts.

XL.....P/N 12-02692.....
XXL.....P/N 12-02694.....

3M™ PARTICULATE RESPIRATORS



Helps provide worker protection against certain non-oil based particles. Comfortable, easy to use, and promotes greater worker acceptance increasing wear time. Features 3M's patented filter media, nose foam, and adjustable noseclip that helps provide a secure seal and helps reduce

eyewear fogging. Workplace applications: woodworking, grinding, sanding, sweeping, bagging, other dusty operations.

Description	Part No.	Price
8210 Standard dust mask	09-01496	.
Vented dusk mask	09-01497	.

3M HALF FACE DISPOSABLE RESPIRATOR ASSEMBLY

The 3M™ 5000 Series Half Facepiece Disposable Respirator Assembly with Organic Vapor and P95 Particulate Filters, Respiratory Protection (51P71, 52P71, 53P71) helps provide protection against certain airborne contaminants. This respirator is NIOSH approved for respiratory protection against certain organic vapors and particulates up to ten times the permissible exposure limit (PEL). This half facepiece respirator is an ideal choice for intermittent use.P/N 09-05716.....



WORX NUISANCE DUST MASK WITH DOUBLE STRAP - 50 PACK

Worx Nuisance Dust Mask with Double Strap - 50 Piece.P/N 01-01826.....



3M™ PARTICULATE RESPIRATOR

The lightweight, disposable N95 particulate dust respirator is designed to help provide quality, reliable worker respiratory protection. 3M uses a variety of innovative features to help you meet your respiratory protection and comfort needs. The respirator incorporates 3M's proprietary technology with advanced electrostatically charged microfiber filter media.

P/N 09-04753.....



3M™ VFLEX™ PARTICULATE RESPIRATOR

This disposable N95 particulate respirator is designed to help provide quality, reliable worker respiratory protection for certain non-oil based particles. It has a unique folded design with 3M proprietary filter media and V-shaped pleats that expand to help make breathing easier. In addition, the V-shaped pleats flex with mouth movement for easier talking. The respirator features uniquely designed tabs for positioning the respirator on the face and embossed front panel to help the respirator retain its shape.P/N 09-04754.....



3M HALF FACEPIECE REUSABLE RESPIRATOR

The 3M™ Half Facepiece Reusable Respirator 6000 Series helps provide protection against particulates and a wide variety of gases and vapors when used with approved cartridges and filters. When properly fitted and used with approved 3M™ cartridges and filters, this respirator helps provide protection at concentrations up to 10 times the Permissible Exposure Limit (PEL). The swept back design of the cartridges helps improve balance and visibility. Remarkably comfortable, soft, lightweight facepiece has eEasy-to-adjust head straps allow for a customized fit to the user. Replaceable cartridges help reduce waste and costs over time.

P/N 09-05764.....

PARTICULATE RESPIRATOR

95% filter efficiency level effective against particulate aerosols free of oil; time use restrictions may apply. Maintenance-free construction. Adjustable nose bridge with foam strip to reduce the potential for eyewear to fog. Latex-free stapled fixed head strap. 20 masks per box.

Box of 2.....P/N 01-01558.....
Box of 20.....P/N 01-01556.....



VALVED PARTICULATE RESPIRATOR

95% filter efficiency level effective against particulate aerosols free of oil; time use restrictions may apply. Maintenance-free construction. Exhalation valve for easy breathing. Adjustable nose bridge with foam strip to reduce the potential for eyewear to fog. Latex-free stapled fixed head strap. 10 masks per box.

Box of 1.....P/N 01-01559.....
Box of 10.....P/N 01-01557.....



3M RUGGED COMFORT HALF REUSABLE RESPIRATOR

The 3M™ Rugged Comfort 6500 Series Half Facepiece Reusable Respirator helps provide respiratory protection in harsh, dirty environments against airborne contaminants when used with approved 3M™ cartridges and filters. When properly fitted and used with approved 3M™ cartridges and filters, this respirator helps provide respiratory protection at concentrations up to 10 times the Permissible Exposure Limit (PEL).

Color	Part No.	Price
Small	09-04755	.
Medium	09-04756	.
Large	09-04757	.

3M™ E-A-R™ PUSH-INS™ CORDED



3M™ E-A-R™ Push-Ins™ Corded Earplugs feature soft and flexible E-A-Rform™ Foam that inserts quickly and easily into the ears for comfortable noise reduction. The push-to-fit design with a flexible stem helps keep the soft foam

tip clean, even when hands are dirty, since there is no need to roll the foam before fitting. Cord allows earplugs to be stored conveniently when earplugs are worn intermittently. Earplugs are packaged in a poly bag to keep them clean prior to use. Recommended applications include assembly and mechanical, chipping, chiseling, cleaning, drilling, furnace operations, grinding, heavy equipment operations, machining, metal repair, painting, pouring/casting, power fastening, riveting, sanding, sawing and weldingP/N 09-04758.....

TO